

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU



MECHANICAL DATA

- Case: JEDEC SMB(DO-214AA) molded plastic body
- Terminals: Solder Plated, solderable per MIL-STD-750,method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.003ounce, 0.093 gram

TYPICAL APPLICATIONS


For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

MAXIMUM RATINGS


(Ratings at 25°C ambient temperature unless otherwise specified)

| Parameter | Symbol | Value | Unit |
|--|--------------------|------------|------|
| Maximum repetitive peak reverse voltage | V _{RRM} | 80 | V |
| Maximum average forward rectified current (see fig.1) | I _{F(AV)} | 3.0 | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL) | I _{FSM} | 80 | A |
| Operating junction temperature range | T _J | -55 to+150 | °C |
| Storage temperature range | T _{stg} | -55 to+150 | °C |

SMB(DO-214AA)

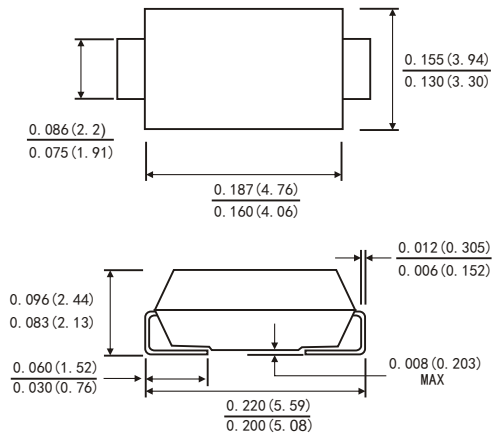

Suggested PAD Layout

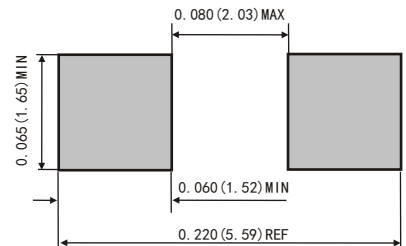

Dimensions in inches and (millimeters)

RATINGS AND CHARACTERISTIC OF SS38SLB

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ Unless otherwise noted)

| Parameter | Test Conditions | | Symbol | TYP. | MAX. | Unit |
|-------------------------------|----------------------|-----------------------|------------------------------|------|------|------|
| Instantaneous forward voltage | I _F =3.0A | T _A =25°C | V _F ¹⁾ | 0.52 | 0.55 | V |
| | | T _A =100°C | | 0.48 | - | |
| | | T _A =125°C | | 0.46 | - | |
| | I _F =1.0A | T _A =25°C | | 0.42 | - | |
| | | T _A =100°C | | 0.34 | - | |
| | | T _A =125°C | | 0.31 | - | |
| Reverse current | V _R =80V | T _A =25°C | I _R ²⁾ | 20 | 100 | μA |
| | | T _A =100°C | | 1.2 | - | mA |
| | | T _A =125°C | | 4.5 | - | |
| Typical junction capacitance | 4V, 1MHz | | C _J | 260 | | pF |

Notes: 1.Pulse test: 300 μs pulse width, 1% duty cycle

2.Pulse test: pulse width≤40ms

THERMAL CHARACTERISTICS

| Parameter | Symbol | SMB | Unit |
|--|------------------|------|------|
| Typical thermal resistance ³⁾ | R _{θJA} | 70.0 | °C/W |
| | R _{θJL} | 25.0 | |

3. Unit mounted on PC board with 5.0mm×5.0mm (0.013 mm thick) copper pads as heat sink

AVAILABLE PACK INFORMATION

| Product code | Pack | Reel Size (mm) | Quantity (pcs/reel) | Box Size L×W×H (mm) | Quantity (reel/box) | Carton Size L×W×H (mm) | Quantity (box/carton) |
|--------------|------|----------------|---------------------|---------------------|---------------------|------------------------|-----------------------|
| SS38SLB-SMB | T/R | Φ300 | 3000 | 340×340×40 | 2 | 370×370×370 | 8 |

RATINGS AND CHARACTERISTIC OF SS38SLB

FIG.1-FORWARD CURRENT DERATING CURVE

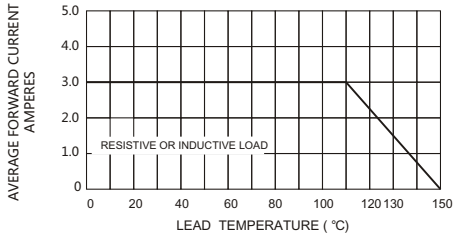


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

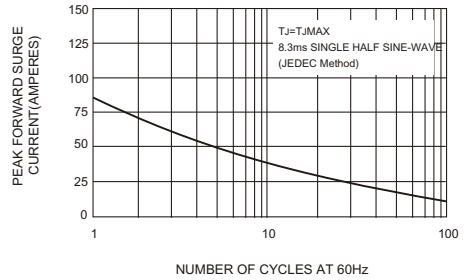


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

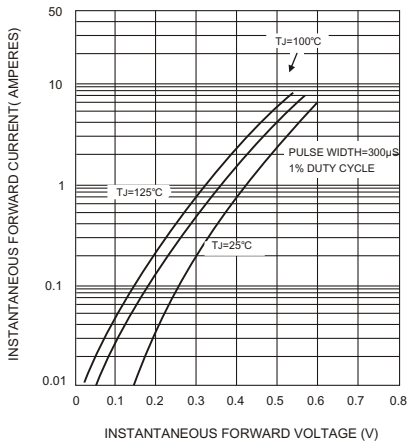


FIG.4-TYPICAL REVERSE CHARACTERISTICS

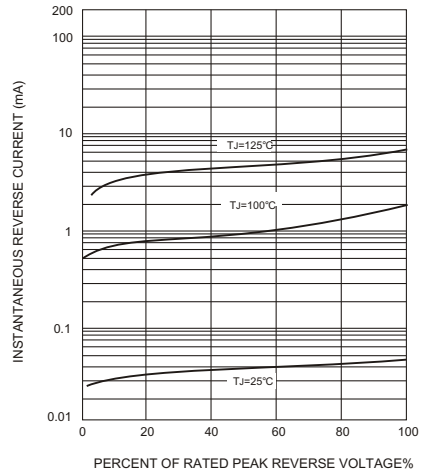


FIG.5-TYPICAL JUNCTION CAPACITANCE

