


Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- High current capability
- Low forward voltage drop
- High temperature soldering guaranteed: 260°C/10 seconds at terminals
- Component in accordance to RoHS 2015/863/EU

Mechanical Data

- Case: GBJ molded plastic body
- Terminals: Plated leads solderable per MIL-STD-750, method 2026
- Mounting Position: Any

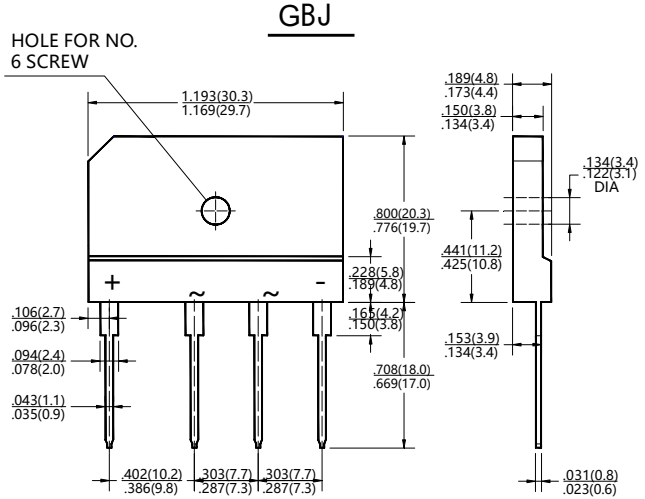

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

(Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

Parameters	Symbol	GBJ3001	GBJ3002	GBJ3004	GBJ3006	GBJ3008	GBJ3010	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum average forward rectified current	$I_{F(AV)}$	30.0						A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method, Total device)	I_{FSM}	350						A
Rating for fusing ($t < 8.3ms$)	I^2t	510						A ² S
Operating junction temperature range	T_j	-55 to 150						°C
Storage temperature range	T_{stg}	-55 to 150						°C

Electrical Characteristics (Per diode, $T_A=25^\circ\text{C}$ Unless otherwise noted)

Parameter	Test Conditions		Symbol	GBJ3001	GBJ3002	GBJ3004	GBJ3006	GBJ3008	GBJ3010	Unit
Max Instantaneous forward voltage	$I_F=15.0\text{A}$		$V_F^{1)}$	1.05						V
Max Reverse current	$V_R=V_{RRM}$	$T_A=25^\circ\text{C}$	$I_R^{2)}$	5						μA
		$T_A=100^\circ\text{C}$		100						
		$T_A=125^\circ\text{C}$		500						

Notes: 1.Pulse test: 300 μs pulse width, 1% duty cycle

2.Pulse test: pulse width $\leq 40\text{ms}$

Thermal Characteristics

Parameter	Symbol	GBJ	Unit
Typical thermal resistance ³⁾	$R_{\theta\text{JC}}$	0.8	$^\circ\text{C/W}$

3.Thermal resistance from per diode junction to case

FIG.1-Forward Current Derating Curve

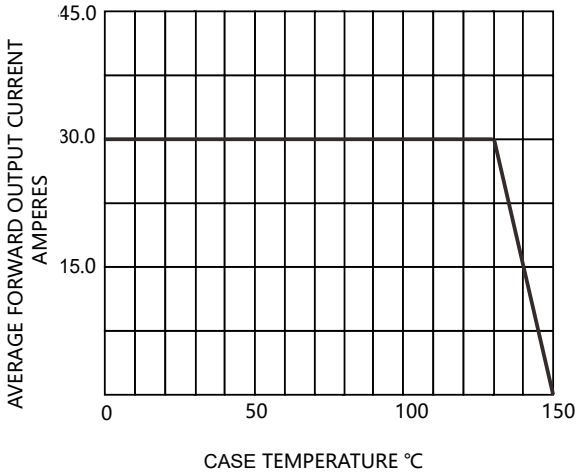


FIG.2-Maximum Forward Surge Current

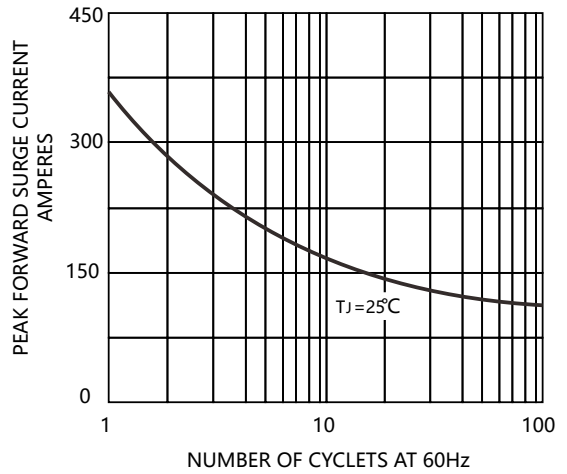


FIG.3-Typical Forward Characteristics


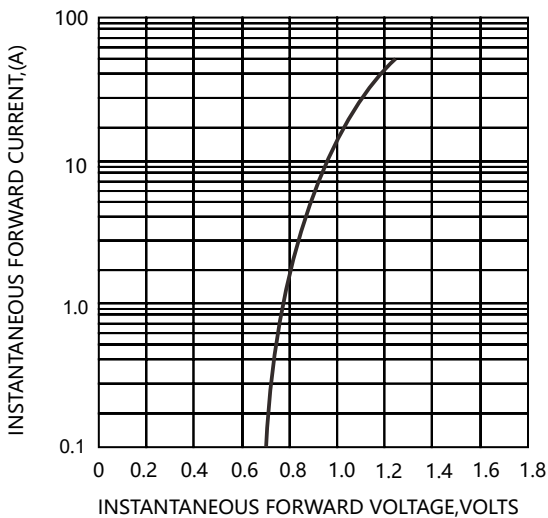


FIG.4 -Typical Reverse Characteristics

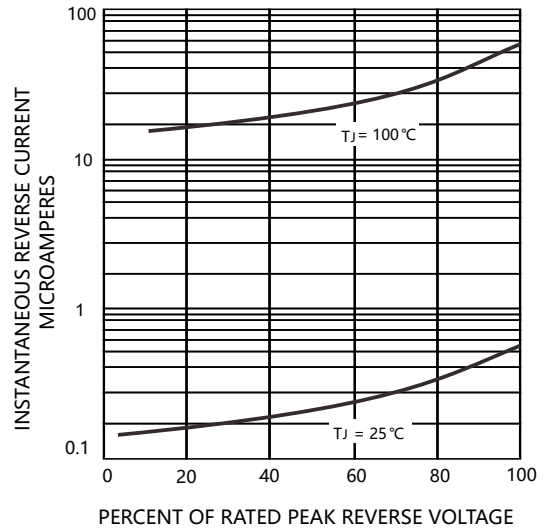

Friendship Reminder

- JiNan JingHeng(hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.
济南晶恒（以下简称JH）保留，未经通知变更本文件和与本文件相关的产品及规格的权利。
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
使用方应在使用、采购本产品之前获取并确认产品信息和规格书的最新版本。
- JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.
JH对其产品用于某特定用途的适用性，既不做任何保证、说明或担保、也不承担任何应用协助或使用方设计的法定责任。
- JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
JH不保证或承担任何责任，其产品被采购使用于任何非预期或授权的应用。
- No license is granted by implication or otherwise under any intellectual property rights of JH.
此规格书属于JH的知识产权,没有经过我司授权不得抄袭。
- JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.
没有JH的书面授权，JH的产品不能在生命支撑设备或系统里作为关键零件使用。