



S E M I C O N D U C T O R

# SR2545D2


SCHOTTKY BARRIER RECTIFIER  
Reverse Voltage - 45 Volts  
Forward Current - 25Amperes

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- High current capability, Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



## TO-263AC D2PAK

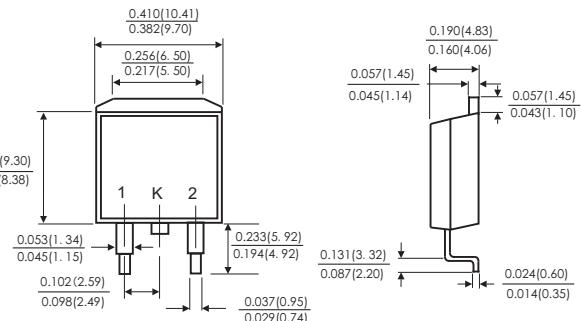

Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: JEDEC TO-263AC molded plastic body
- Terminals: Solderable per MIL-STD-202, method 208
- Polarity: As marked
- Mounting Position: Any

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave, resistive or inductive load. For capacitive load, derate by 20%.)

|  | Symbols           | SR<br>2545D2                              | Units         |
|--|-------------------|---|---------------|
| Maximum repetitive peak reverse voltage  | V <sub>RRM</sub>  | 45  | Volts         |
| Maximum RMS voltage  | V <sub>RMS</sub>  | 32  | Volts         |
| Maximum DC blocking voltage  | V <sub>DC</sub>   | 45  | Volts         |
| Maximum average forward rectified current<br>See Fig. 1  | I <sub>(AV)</sub> | 25.0                                      | Amps          |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load<br>(JEDEC method)  | I <sub>FSM</sub>  | 200.0                                     | Amps          |
| Maximum instantaneous forward voltage<br>at 25.0 A   | V <sub>F</sub>    | 0.55                                      | Volts         |
| Maximum instantaneous reverse current at rated DC blocking voltage<br>(Note 1)   | I <sub>R</sub>    | 250<br>50                                 | $\mu$ A<br>mA |
| Typical thermal resistance (Note 2)  | R <sub>θJC</sub>  | 2.5                                       | °C/W          |
| Storage temperature range  | T <sub>STG</sub>  | -65 to +200                               | °C            |
| Operating junction temperature range<br>at reduced reverse voltage V <sub>R</sub> <=80%V <sub>RRM</sub><br>V <sub>R</sub> <=50%V <sub>RRM</sub><br>in DC forward model | T <sub>J</sub>    | -65 to +150<br>-65 to +175<br>-65 to +200 | °C            |

Notes: 1. Pulse test: 300  $\mu$ s pulse width, 1% duty cycle

2. Thermal resistance from junction to case

## RATINGS AND CHARACTERISTIC CURVES SR2545D2

FIG.1-FORWARD CURRENT DERATING CURVE

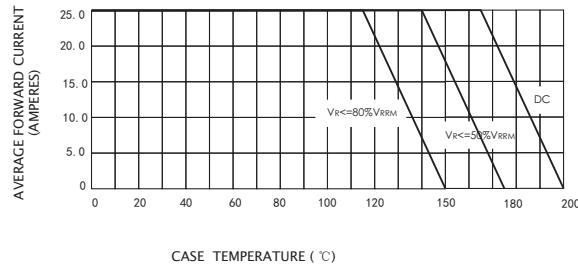


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

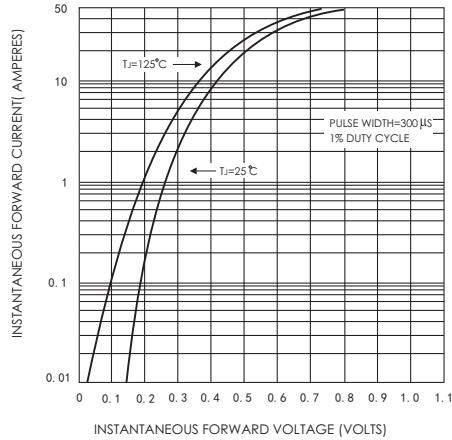


FIG.5-TYPICAL JUNCTION CAPACITANCE

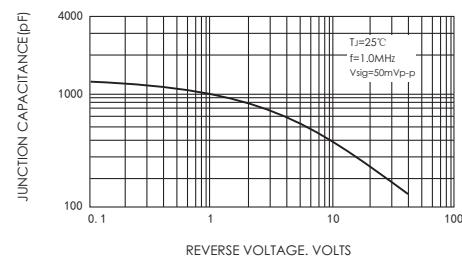


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

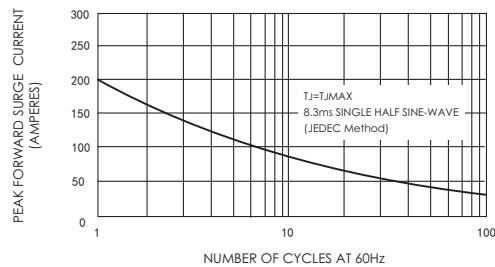


FIG.4-TYPICAL REVERSE CHARACTERISTICS

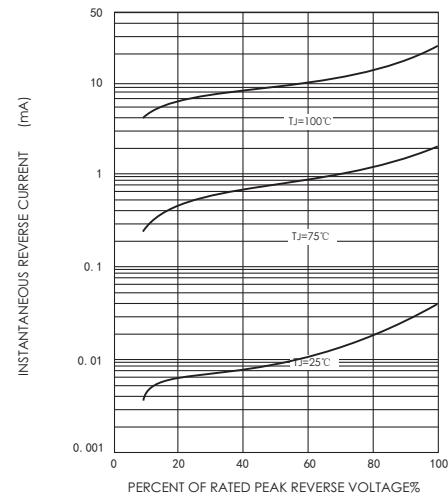


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

