



MB1F THRU MB10F (B TYPE)

SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

Reverse Voltage: 100 to 1000 Volts
Forward Current: 0.8 Amps


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- Rating to 1000V PRV
- Ideal for printed circuit board
- High temperature soldering guaranteed: 260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU

MECHANICAL DATA

- Case: MBF molded plastic body
- Terminals: Plated leads solderable per MIL-STD-750, method 2026
- Mounting Position: Any
- Marking: as marked

JF B
MB10F

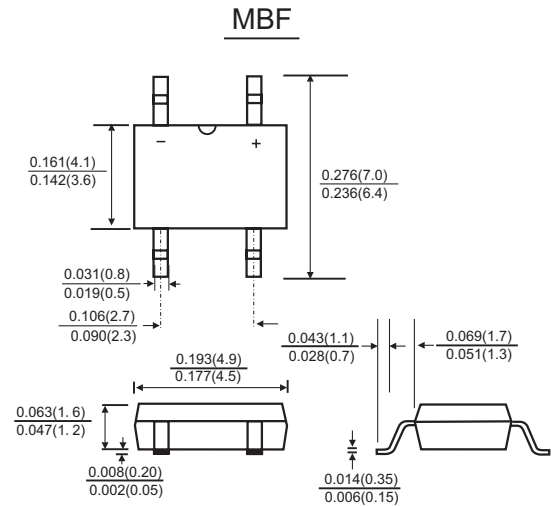

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

		Symbols	MB1F	MB2F	MB4F	MB6F	MB8F	MB10F	Units
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current on glass-epoxy P.C.B.(NOTE1) on aluminum substrate(NOTE2)		I(AV)	0.8						Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	30						Amps
Maximum Instantaneous Forward Voltage at 0.8 A		V _F	1.1						Volts
Maximum DC Reverse Current at rated DC blocking voltage	T _A =25°C	I _R	5						μA
	T _A =125°C		500						
Typical junction capacitance(Note 2)		C _J	13						pF
Typical thermal resistance (Note 1)		R _{θJA}	100						°C/W
		R _{θJL}	36						
Operating junction and storage temperature range		T _J T _{STG}	-55 to +150						°C

Note: 1. On glass-epoxy P.C.B mounted on 0.05*0.05"(1.3*1.3mm) pads.

2. Measured at 1MHz and applied reverse voltage of 4.0 Volts.

RATINGS AND CHARACTERISTIC CURVES MB1F THRU MB10F (B TYPE)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

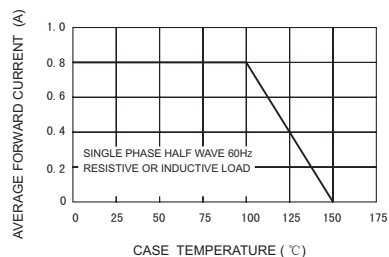


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

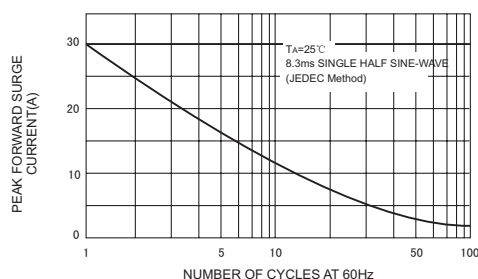


FIG3-TYPICAL JUNCTION CAPACITANCE

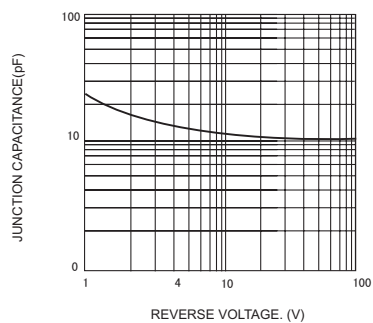


FIG4-TYPICAL FORWARD CHARACTERISTICS

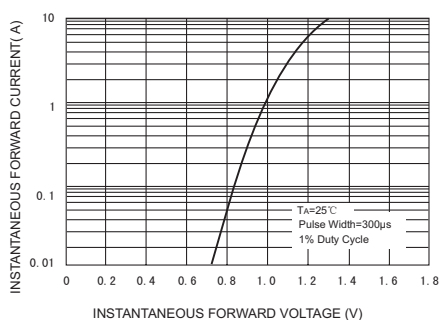


FIG.5-TYPICAL REVERSE CHARACTERISTICS

