

# SR220 THRU SR2200


SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts


Forward Current - 2.0Amperes

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU



## DO-41

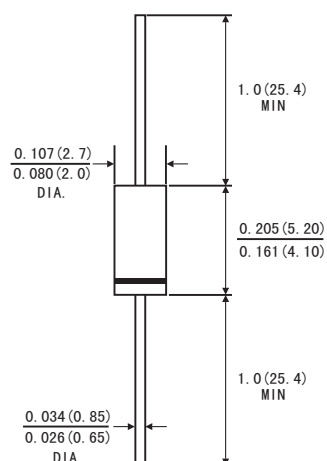

Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: JEDEC DO-41 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: color band denotes cathode end
- Mounting Position: Any

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	SR 220	SR 230	SR 240	SR 260	SR 2100	SR 2150	SR 2200	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	60	100	150	200	Volts
Maximum RMS voltage	$V_{RMS}$	14	21	28	42	71	105	140	Volts
Maximum DC blocking voltage	$V_{DC}$	20	30	40	60	100	150	200	Volts
Maximum average forward rectified current	$I_{(AV)}$	2.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	50.0							Amps
Maximum instantaneous forward voltage at 2.0 A(Note 1)	$V_F$	0.55		0.70	0.85	0.90	0.95		Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	$I_R$	100			20				$\mu A$
	$T_A=25^\circ C$	5.0			-				$mA$
	$T_A=100^\circ C$	-			3.0				
$T_A=125^\circ C$									
Typical junction capacitance(Note 3)	$C_J$	170							Pf
Typical thermal resistance(Note 2)	$R_{\theta JA}$	50.0							$^\circ C/W$
Operating junction temperature range	$T_J$	-55 to+150							$^\circ C$
Storage temperature range	$T_{STG}$	-55 to+150							$^\circ C$

Notes: 1.Pulse test: 300  $\mu s$  pulse width,1% duty cycle

2.Thermal resistance from junction to lead, and/or to ambient P.C.B. mounted with 0.375"(9.5mm) lead length with 1.5 X1.5"(38X38mm)copper pads

3.Measured at 1.0MHz and reverse voltage of 4.0 volts

# RATINGS AND CHARACTERISTIC CURVES SR220 THRU SR2200

FIG.1-FORWARD CURRENT DERATING CURVE

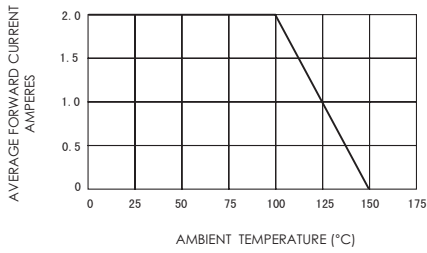


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

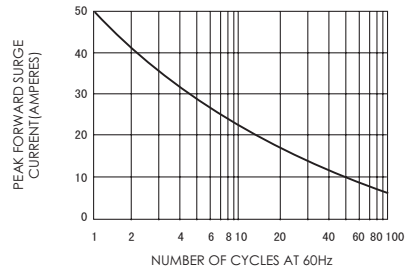


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

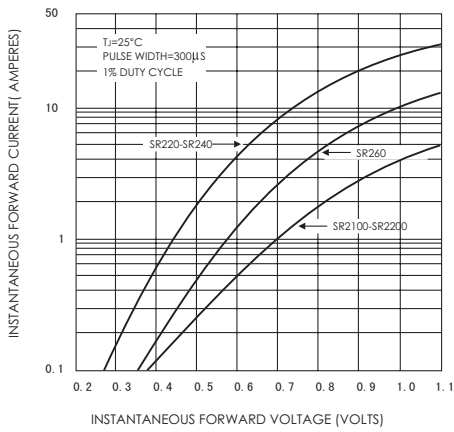


FIG.4-TYPICAL REVERSE CHARACTERISTICS

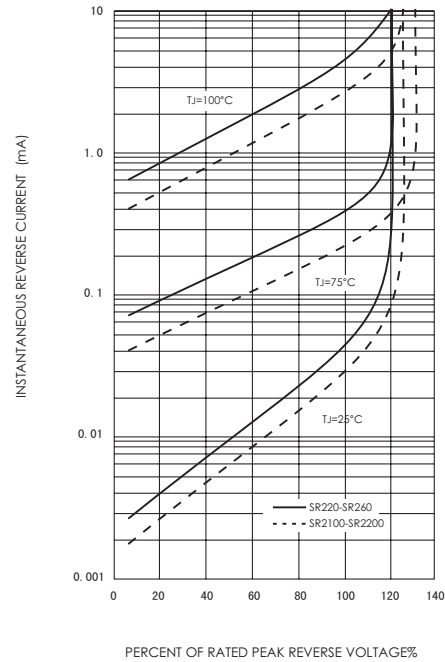


FIG.5-TYPICAL JUNCTION CAPACITANCE

