

FEATURES

- Total power dissipation: max. 500 mW
- Small plastic package suitable for surface mounted design
- Tolerance approximately $\pm 5\%$
- High temperature soldering guaranteed: 260°C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

SOD-123FL



SOD-123



MECHANICAL DATA

- Case: SOD-123 plastic case
- Weight: Approx. 0.01 gram

ABSOLUTE MAXIMUM RATINGS(LIMITING VALUES) (TA=25°C)

| | Symbols | Value | Units |
|---|------------------|------------|-------|
| Zener current see table "Characteristics" | | | |
| Power dissipation | P _D | 500 | mW |
| Junction temperature | T _J | 150 | °C |
| Storage temperature range | T _{STG} | -55 to+150 | °C |

ELECTRICAL CHARACTERISTICS (TA=25°C)

| | Symbols | Min | Typ | Max | Units |
|---|------------------|-----|-----|-----|-------|
| Thermal resistance junction to ambient | R _{θJA} | | | 340 | °C/W |
| Thermal resistance junction to Lead | R _{θJL} | | | 150 | °C/W |
| Forward voltage at I _F =10mA | V _F | | | 0.9 | V |

MM1Z... SILICON PLANAR ZENER DIODES

| Type | Marking Code | Zener Voltage range ^{1) 2)} | | | Dynamic resistance ³⁾ | | | Reverse leakage current | |
|-----------|--------------|--------------------------------------|-------------------------------------|---------------|---|-------|------|-------------------------|-------------------|
| | | V _{ZNOM} | I _{ZT} for V _{ZT} | | r _{ZD} and r _{ZJK} at I _{ZK} | | | I _R | at V _R |
| | | V | mA | V | Ω | Ω | mA | μA | V |
| MM1Z5221B | A4 | 2.4 | 20 | 2.28...2.52 | 30 | 1,200 | 0.25 | 100 | 1 |
| MM1Z5222B | AB | 2.5 | 20 | 2.38...2.63 | 30 | 1,250 | 0.25 | 100 | 1 |
| MM1Z5223B | B4 | 2.7 | 20 | 2.57...2.84 | 30 | 1,300 | 0.25 | 75 | 1 |
| MM1Z5224B | AC | 2.8 | 20 | 2.66...2.94 | 30 | 1,400 | 0.25 | 75 | 1 |
| MM1Z5225B | C4 | 3.0 | 20 | 2.85...3.15 | 29 | 1,600 | 0.25 | 50 | 1 |
| MM1Z5226B | D4 | 3.3 | 20 | 3.14...3.47 | 28 | 1,600 | 0.25 | 25 | 1 |
| MM1Z5227B | E4 | 3.6 | 20 | 3.42...3.78 | 24 | 1,700 | 0.25 | 15 | 1 |
| MM1Z5228B | F4 | 3.9 | 20 | 3.71...4.1 | 23 | 1,900 | 0.25 | 10 | 1 |
| MM1Z5229B | H4 | 4.3 | 20 | 4.09...4.52 | 22 | 2,000 | 0.25 | 5 | 1 |
| MM1Z5230B | J4 | 4.7 | 20 | 4.47...4.94 | 19 | 1,900 | 0.25 | 5 | 2 |
| MM1Z5231B | K4 | 5.1 | 20 | 4.85...5.36 | 17 | 1,600 | 0.25 | 5 | 2 |
| MM1Z5232B | M4 | 5.6 | 20 | 5.32...5.88 | 11 | 1,600 | 0.25 | 5 | 3 |
| MM1Z5233B | AD | 6.0 | 20 | 5.7...6.3 | 7 | 1,600 | 0.25 | 5 | 3.5 |
| MM1Z5234B | N4 | 6.2 | 20 | 5.89...6.51 | 7 | 1,000 | 0.25 | 5 | 4 |
| MM1Z5235B | P4 | 6.8 | 20 | 6.46...7.14 | 5 | 750 | 0.25 | 3 | 5 |
| MM1Z5236B | R4 | 7.5 | 20 | 7.13...7.88 | 6 | 500 | 0.25 | 3 | 6 |
| MM1Z5237B | X4 | 8.2 | 20 | 7.79...8.61 | 8 | 500 | 0.25 | 3 | 6.5 |
| MM1Z5238B | AE | 8.7 | 20 | 8.27...9.14 | 8 | 600 | 0.25 | 3 | 6.5 |
| MM1Z5239B | Y4 | 9.1 | 20 | 8.65...9.56 | 10 | 600 | 0.25 | 3 | 7 |
| MM1Z5240B | Z4 | 10 | 20 | 9.5...10.5 | 17 | 600 | 0.25 | 3 | 8 |
| MM1Z5241B | A5 | 11 | 20 | 10.45...11.55 | 22 | 600 | 0.25 | 2 | 8.4 |
| MM1Z5242B | B5 | 12 | 20 | 11.4...12.6 | 30 | 600 | 0.25 | 1 | 9.1 |
| MM1Z5243B | C5 | 13 | 9.5 | 12.35...13.65 | 13 | 600 | 0.25 | 0.5 | 9.9 |
| MM1Z5245B | D5 | 15 | 8.5 | 14.25...15.75 | 16 | 600 | 0.25 | 0.1 | 11 |
| MM1Z5246B | E5 | 16 | 7.8 | 15.2...16.8 | 17 | 600 | 0.25 | 0.1 | 12 |
| MM1Z5247B | AH | 17 | 7.4 | 16.15...17.85 | 19 | 600 | 0.25 | 0.1 | 13 |
| MM1Z5248B | F5 | 18 | 7 | 17.1...18.9 | 21 | 600 | 0.25 | 0.1 | 14 |
| MM1Z5249B | K9 | 19 | 6.6 | 18.05...19.95 | 23 | 600 | 0.25 | 0.1 | 14 |
| MM1Z5250B | H5 | 20 | 6.2 | 19...21 | 25 | 600 | 0.25 | 0.1 | 15 |
| MM1Z5251B | J5 | 22 | 5.6 | 20.9...23.1 | 29 | 600 | 0.25 | 0.1 | 17 |
| MM1Z5252B | K5 | 24 | 5.2 | 22.8...25.2 | 33 | 600 | 0.25 | 0.1 | 18 |
| MM1Z5253B | M9 | 25 | 5 | 23.75...26.25 | 35 | 600 | 0.25 | 0.1 | 19 |
| MM1Z5254B | M5 | 27 | 4.6 | 25.65...28.35 | 41 | 600 | 0.25 | 0.1 | 21 |
| MM1Z5255B | AJ | 28 | 4.5 | 26.6...29.4 | 44 | 600 | 0.25 | 0.1 | 21 |
| MM1Z5256B | N5 | 30 | 4.2 | 28.5...31.5 | 49 | 600 | 0.25 | 0.1 | 23 |
| MM1Z5257B | P5 | 33 | 3.8 | 31.35...34.65 | 58 | 700 | 0.25 | 0.1 | 25 |
| MM1Z5258B | R5 | 36 | 3.4 | 34.2...37.8 | 70 | 700 | 0.25 | 0.1 | 27 |
| MM1Z5259B | X5 | 39 | 3.2 | 37.05...40.95 | 80 | 800 | 0.25 | 0.1 | 30 |
| MM1Z5260B | Y5 | 43 | 3 | 40.85...45.15 | 93 | 900 | 0.25 | 0.1 | 33 |
| MM1Z5261B | Z5 | 47 | 2.7 | 44.65...49.35 | 105 | 1,000 | 0.25 | 0.1 | 36 |
| MM1Z5262B | A6 | 51 | 2.5 | 48.45...53.55 | 125 | 1,100 | 0.25 | 0.1 | 39 |
| MM1Z5263B | B6 | 56 | 2.2 | 53.2...58.8 | 150 | 1,300 | 0.25 | 0.1 | 43 |
| MM1Z5264B | AK | 60 | 2.1 | 57...63 | 170 | 1,400 | 0.25 | 0.1 | 46 |
| MM1Z5265B | C6 | 62 | 2 | 58.9...65.1 | 185 | 1,400 | 0.25 | 0.1 | 47 |
| MM1Z5266B | D6 | 68 | 1.8 | 64.6...71.4 | 230 | 1,600 | 0.25 | 0.1 | 52 |
| MM1Z5267B | E6 | 75 | 1.7 | 71.25...78.75 | 270 | 1,700 | 0.25 | 0.1 | 56 |
| MM1Z5268B | F6 | 82 | 1.5 | 77.9...86.1 | 330 | 2,000 | 0.25 | 0.1 | 62 |

1) V_Z is tested with pulses t_p=20ms.

2) Nominal Zener voltage is measured with device junction in thermal equilibrium at T_L=30°C ± 1°C.

3) Z_T and Z_K are measured by dividing the AC voltage drop across the device by the AC current applied. The specified limits are for I_{Z(AC)}=0.1 I_{Z(OC)} with AC frequency = 1 kHz.

MM1Z... SILICON PLANAR ZENER DIODES

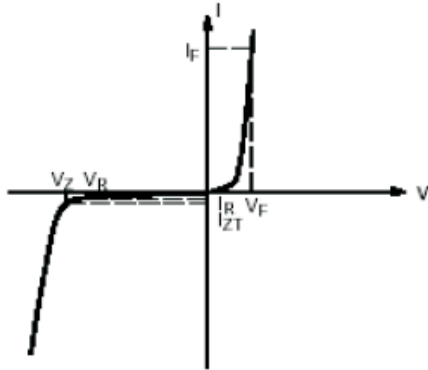


Figure 1. Zener Voltage Regulator

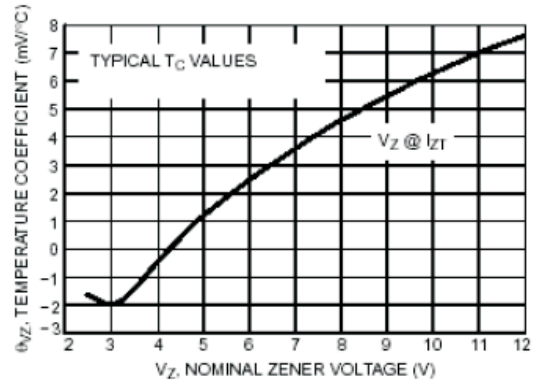


Figure 2 Temperature Coefficients (Temperature Range -55°C to +150°C)

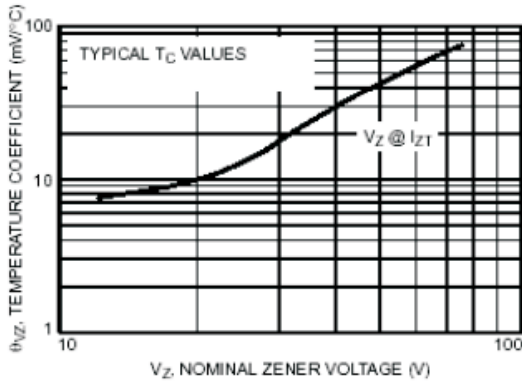


Figure 3. Temperature Coefficients (Temperature Range -55°C to +150°C)

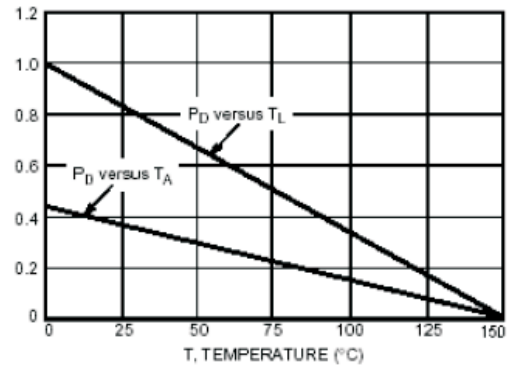


Figure 4. Steady State Power Derating

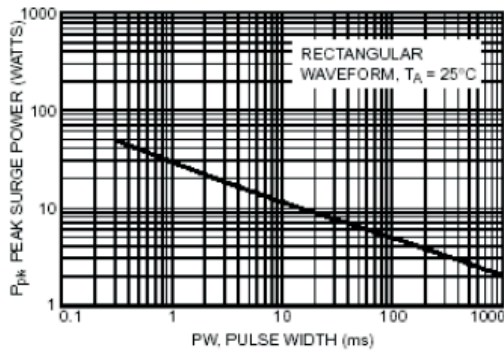


Figure 5. Maximum Nonrepetitive Surge Power

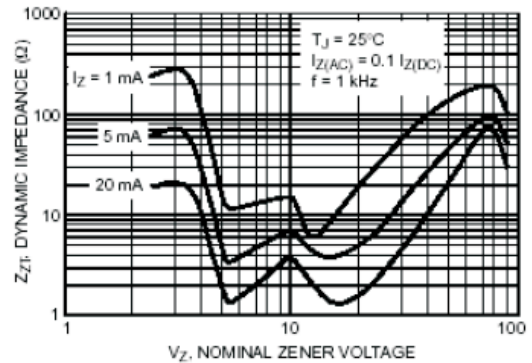


Figure 6. Effect of Zener Voltage on Zener Impedance

MM1Z... SILICON PLANAR ZENER DIODES

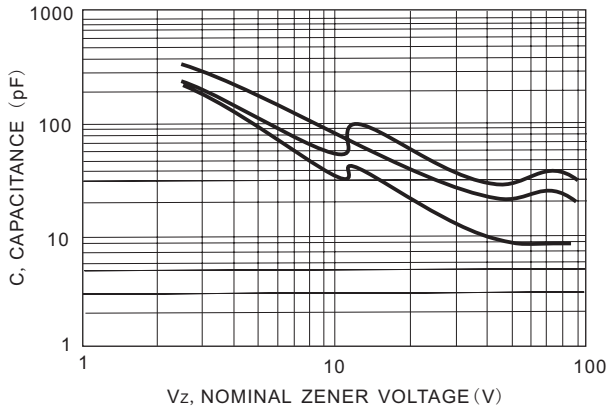


Figure 7. Typical Capacitance

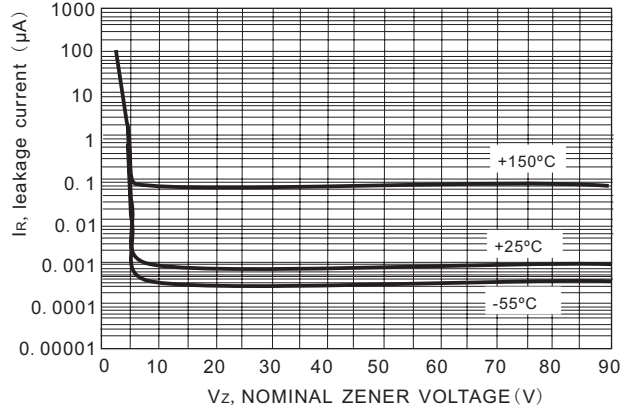


Figure 8. Typical Leakage Current

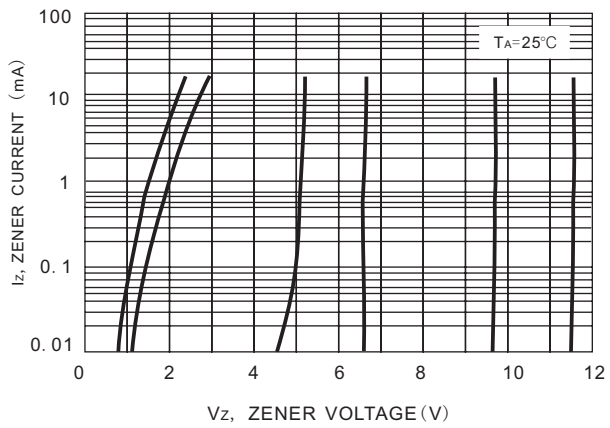


Figure 9. Zener Voltage versus Zener Current (Vz Up to 12V)


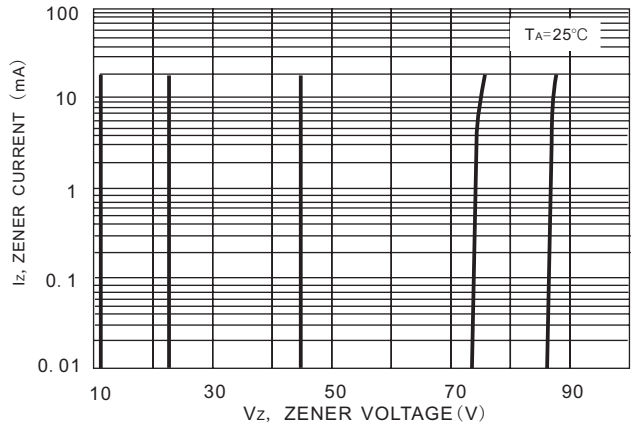


Figure 10. Zener Voltage versus Zener Current


MM1Z... SILICON PLANAR ZENER DIODES

SOD-123FL

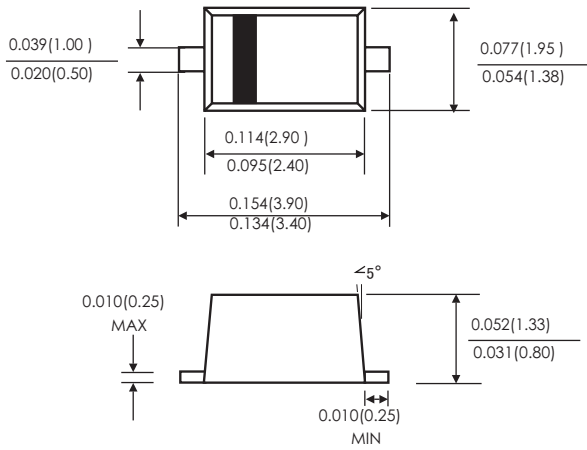

Dimensions in inches and (millimeters)

SOD-123

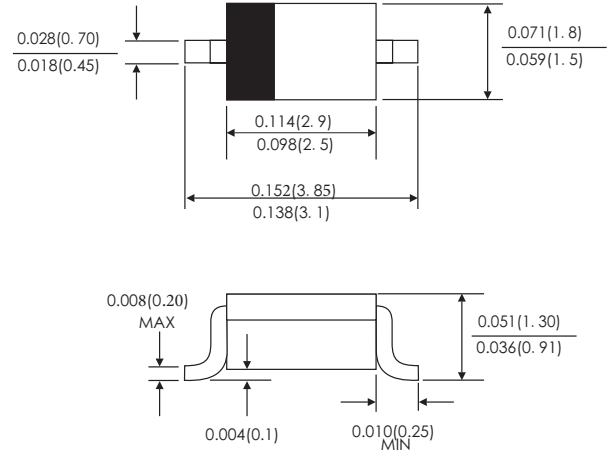

Dimensions in inches and (millimeters)