


Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
 - Metal silicon junction ,majority carrier conduction
 - Guard ring for overvoltage protection
 - Low power loss ,high efficiency
 - High current capability ,low forward voltage drop
 - High surge capability
 - Very low profile-typical height of 1.1mm
 - Ideal for automated placement
- High temperature soldering guaranteed:260°C/10 seconds at terminals
Component in accordance to RoHS 2015/863/EU




Mechanical Data

- Case: TO-277 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Mounting Position: Any
- Weight: 0.092 grams (approx)

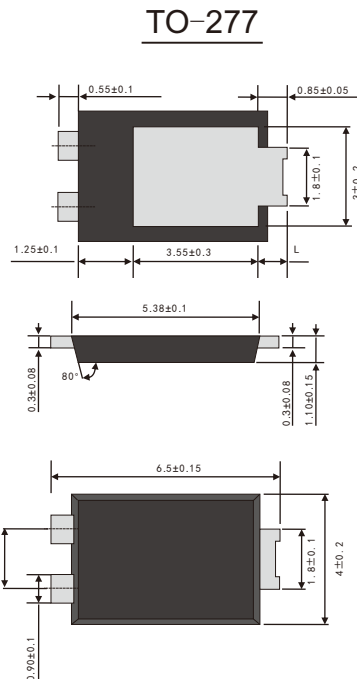

Typical Applications

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications



Dimensions in inches and (millimeters)

Maximum Ratings

(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	200	V
Maximum average forward rectified current	I _{F(AV)}	15.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I _{FSM}	200	A
Operating junction temperature range	T _J	-55 to +150	°C
Storage temperature range	T _{stg}	-55 to +150	°C

RATINGS AND CHARACTERISTIC OF SP15U200L

Electrical Characteristics (T_A=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	Typ.	Max.	Unit
Instantaneous forward voltage	T _A =25°C	I _F =2A	V _F ¹⁾	0.63	–	V
		I _F =10A		0.78	–	
		I _F =15A		0.82	0.90	
	T _A =125°C	I _F =2A		0.48	–	
		I _F =10A		0.64	–	
		I _F =15A		0.70	–	
Reverse current	V _R =200V	T _A =25°C	I _R ²⁾	2.0	20	μA
		T _A =100°C		0.5	–	mA
		T _A =125°C		2.0	–	
Typical junction capacitance	4V, 1MHz		C _J	272		pF

Notes: 1.Pulse test: 300 μs pulse width, 1% duty cycle

2.Pulse test: pulse width ≤ 40ms

Thermal Characteristics

Parameter	Symbol	TO-277	Unit
Typical thermal resistance ³⁾	R _{θJA}	60.0	°C/W
	R _{θJL}	3.0	

3 Units mounted on recommended PCB 1 oz. Pad layout

Available Pack Information

Product code	Pack	Reel Size (mm)	Quantity (pcs/reel)	Box Size L×W×H (mm)	Quantity (reel/box)	Carton Size L×W×H (mm)	Quantity (box/carton)
SP15U200L-TO-277	T/R	φ 330	5000	338×338×40	2	365×365×360	7

RATINGS AND CHARACTERISTIC OF SP15U200L

Fig.1-Forward Current Derating Curve

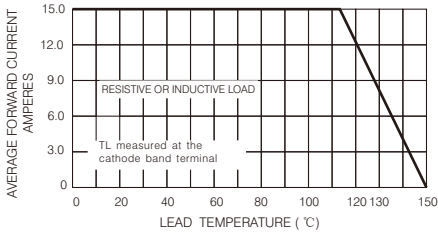


Fig.2-Maximum Non-repetitive Peak Forward Surge Current

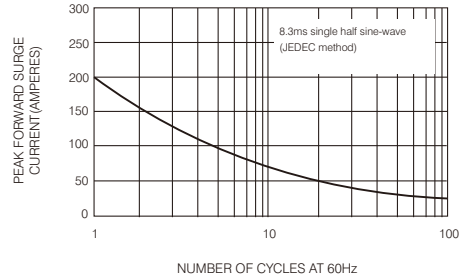


Fig.3-Typical Instantaneous Forward Characteristics

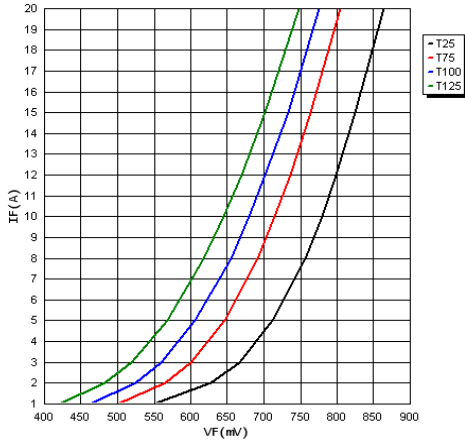


Fig.4-Typical Reverse Characteristics


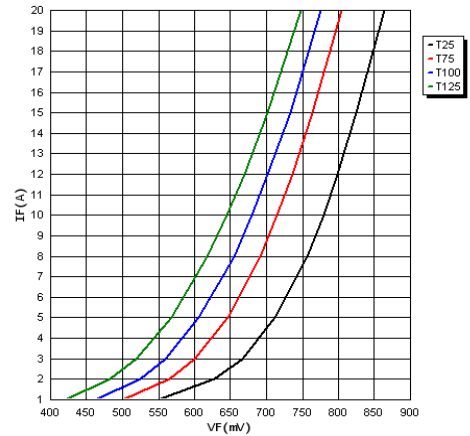


Fig.5-Typical Junction Capacitance

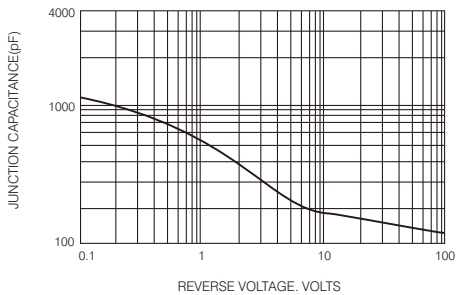

Friendship Reminder

- JiNan JingHeng(hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.
济南晶恒（以下简称JH）保留，未经通知变更本文件和与本文件相关的产品及规格的权利。
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
使用方应在使用、采购本产品之前获取并确认产品信息和规格书的最新版本。
- JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.
JH对其产品用于某特定用途的适用性，既不做任何保证、说明或担保、也不承担任何应用协助或使用方设计的法定责任。
- JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
JH不保证或承担任何责任，其产品被采购使用于任何非预期或授权的应用。
- No license is granted by implication or otherwise under any intellectual property rights of JH.
此规格书属于JH的知识产权,没有经过我司授权不得抄袭。
- JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.
没有JH的书面授权，JH的产品不能在生命支撑设备或系统里作为关键零件使用。