


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- High temperature soldering guaranteed:260℃/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU



DO-201AD

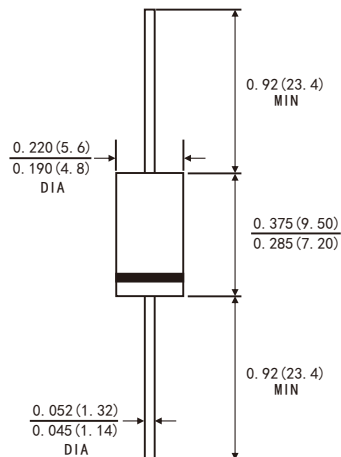

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: JEDEC DO-201AD molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: color band denotes cathode end
- Mounting Position: Any
- Weight: 0.041ounce, 1.15 grams

TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

MAXIMUM RATINGS

(Ratings at 25℃ ambient temperature unless otherwise specified)

| PRIMARY CHARACTERISTICS | |
|----------------------------------|-------|
| $I_F(AV)$ | 5.0A |
| V_{RRM} | 150V |
| I_{FSM} | 120A |
| V_F at $I_F=5.0A, 25^{\circ}C$ | 0.75V |
| T_{JMAX} | 150℃ |

| Parameter | Symbol | SR5150SL | Unit |
|--|-----------|------------|------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 150 | V |
| Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1) | $I_F(AV)$ | 5.0 | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL) | I_{FSM} | 120 | A |
| Operating junction temperature range | T_J | -55 to+150 | ℃ |
| Storage temperature range | T_{stg} | -55 to+150 | ℃ |

RATINGS AND CHARACTERISTIC OF SR5150SL

ELECTRICAL CHARACTERISTCS (TA=25℃ Unless otherwise noted)

| Parameter | Test Conditions | | Symbol | TYP. | MAX. | Unit |
|------------------------------|-----------------|---------|------------------|-------|-------|------|
| Instaneous forward voltage | IF=5. 0A | TA=25℃ | VF ¹⁾ | 0. 75 | 0. 80 | V |
| | | TA=100℃ | | 0. 62 | — | |
| | | TA=125℃ | | 0. 60 | — | |
| Reverse current | VR=150V | TA=25℃ | IR ²⁾ | — | 10 | μA |
| | | TA=100℃ | | — | 1000 | |
| | | TA=125℃ | | — | 3000 | |
| Typical junction capacitance | 4V, 1MHz | | CJ | 170 | | pF |

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Pulse test: pulse width≤40ms

THERMAL CHARACTERISTCS (TA=25℃ Unless otherwise noted)

| Parameter | Symbol | SR5150SL | Unit |
|--|--------|----------|------|
| Typical thermal resistance ³⁾ | RθJA | 25.0 | ℃/W |
| | RθJL | 8.0 | |

3.Thermal resistance from junction to lead vertical P.C.B. mounted , 0.375"(9.5mm)lead length

AVAILABALE PACK INFORMATION

| Product code | Pack | Box Size L*W*H(mm) | Quantity (pcs/box) | Carton SizeL*W*H(mm) | Quantity (box/carton) |
|-------------------|------|--------------------|--------------------|----------------------|-----------------------|
| SR5150SL-DO-201AD | B/P | 190*80*21 | 200 | 433*203*230 | 50 |
| SR5150SL-DO-201AD | T/B | 264*74*135 | 1000 | 400*267*286 | 10 |

RATINGS AND CHARACTERISTIC OF SR5150SL

FIG.1-FORWARD CURRENT DERATING CURVE

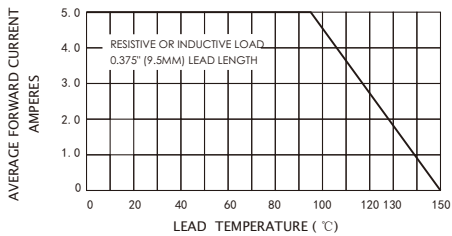


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

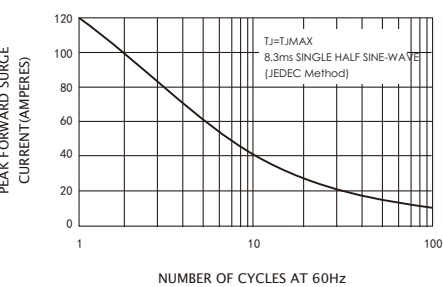


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

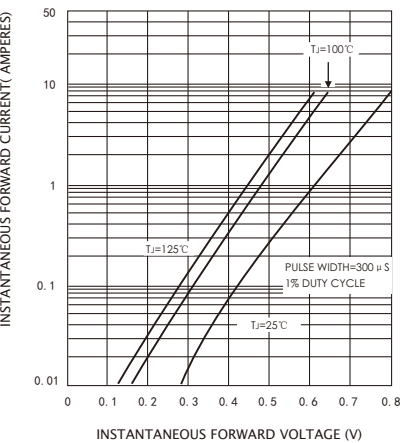


FIG.4-TYPICAL REVERSE CHARACTERISTICS

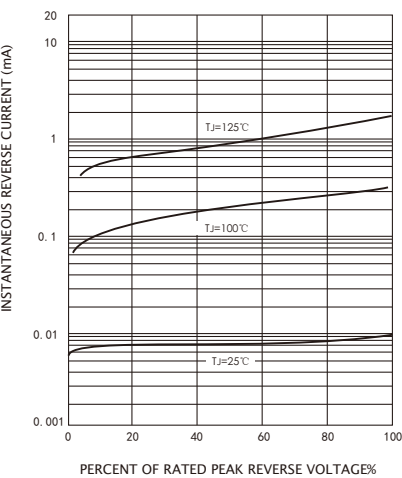


FIG.5-TYPICAL JUNCTION CAPACITANCE

