



## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU



## DO-201AD

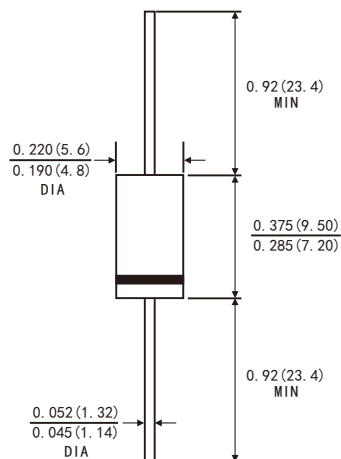

Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: JEDEC DO-201AD molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750, method 2026
- Polarity: color band denotes cathode end
- Mounting Position: Any
- Weight: 0.041 ounce, 1.15 grams

## TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters,  
free wheeling ,and polarity protection applications

## PRIMARY CHARACTERISTICS

I <sub>F(AV)</sub>	5.0A
V <sub>RRM</sub>	65V
I <sub>FSM</sub>	120A
V <sub>F</sub> at I <sub>F</sub> =5.0A	0.46V
T <sub>JMAX</sub>	150℃

## MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified )

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	65	V
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	$I_{F(AV)}$	5.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	$I_{FSM}$	120	A
Operating junction temperature range	$T_J$	-55 to +150	°C
Storage temperature range	$T_{stg}$	-55 to +150	°C

# RATINGS AND CHARACTERISTIC OF SR565L

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	Typ.	Max.	Unit
Instaneous forward voltage	I <sub>F</sub> =5.0A	T <sub>A</sub> =25°C	V <sub>F</sub> <sup>1)</sup>	0.46	0.52	V
		T <sub>A</sub> =100°C		0.45	—	
		T <sub>A</sub> =125°C		0.43	—	
Reverse current	V <sub>R</sub> =65V	T <sub>A</sub> =25°C	I <sub>R</sub> <sup>2)</sup>	60	150	μA
		T <sub>A</sub> =100°C		—	10	mA
		T <sub>A</sub> =125°C		—	30	
Typical junction capacitance	4V, 1MHz		C <sub>J</sub>	370		pF

Notes: 1.Pulse test: 300 μs pulse width, 1% duty cycle

2.Pulse test: pulse width ≤ 40ms

## THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Typical thermal resistance <sup>3)</sup>	R <sub>θJA</sub>	25.0	°C/W
	R <sub>θJL</sub>	8.0	

3.Thermal resistance from junction to lead vertical P.C.B. mounted , 0.375"(9.5mm)lead length

## AVAILABLE PACK INFORMATION

Product code	Pack	Box Size L*W*H(mm)	Quantity(pcs/box)	Carton SizeL*W*H(mm)	Quantity(box/carton)
SR565L-DO-201AD	B/P	190*80*21	200	433*203*230	50
SR565L-DO-201AD	T/B	264*74*135	1000	400*267*286	10

# RATINGS AND CHARACTERISTIC OF SR565L

FIG.1-FORWARD CURRENT DERATING CURVE

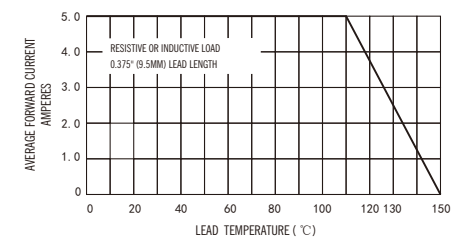


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

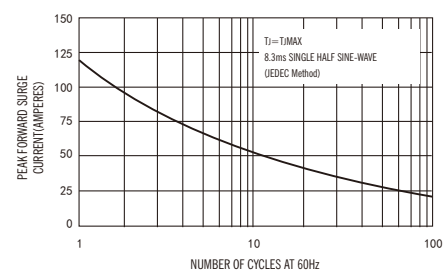


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

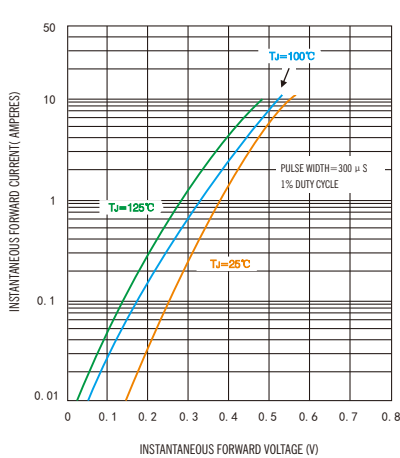


FIG.4-TYPICAL REVERSE CHARACTERISTICS

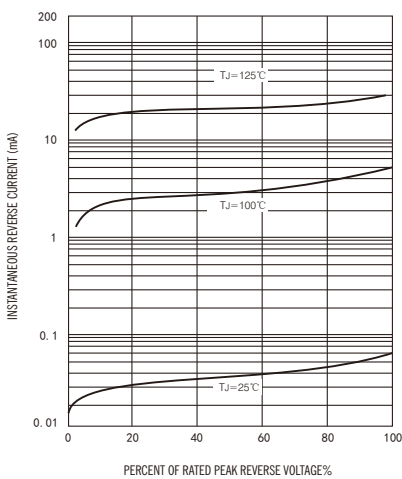


FIG.5-TYPICAL JUNCTION CAPACITANCE

