

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- Very low profile-typical height of 1.1mm
- Ideal for automated placement
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU





MECHANICAL DATA

- Case: TO-277 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Mounting Position: Any
- Weight: 0.092 grams(approx)

TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters,
free wheeling ,and polarity protection applications

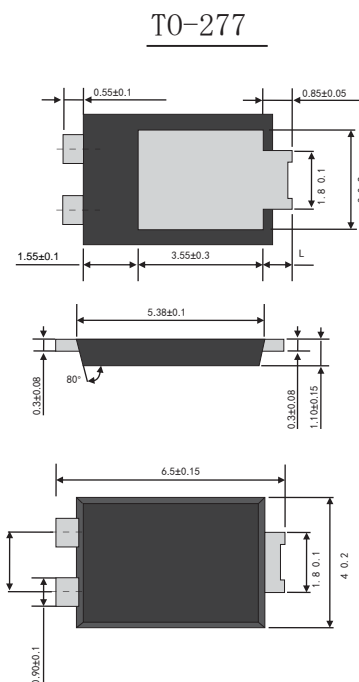

Dimensions in inches and (millimeters)

MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified)

| Parameter | Symbol | Value | Unit |
|--------------------------------------------------------------------------------------------------------------|-------------|-------------|------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 200 | V |
| Maximum average forward rectified current | $I_{F(AV)}$ | 30.0 | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL) | I_{FSM} | 250 | A |
| Operating junction temperature range | T_J | -55 to +150 | °C |
| Storage temperature range | T_{stg} | -55 to +150 | °C |

RATINGS AND CHARACTERISTIC OF SP30200

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ Unless otherwise noted)

| Parameter | Test Conditions | | Symbol | TYP. | MAX. | Unit |
|-------------------------------|--------------------|---------------------------|---------------------|------|------|---------------|
| Instantaneous forward voltage | $I_F=30.0\text{A}$ | $T_A=25^{\circ}\text{C}$ | V_F ¹⁾ | 0.88 | 0.95 | V |
| | | $T_A=125^{\circ}\text{C}$ | | 0.74 | - | |
| | $I_F=5.0\text{A}$ | $T_A=25^{\circ}\text{C}$ | | 0.70 | - | |
| | | $T_A=125^{\circ}\text{C}$ | | 0.55 | - | |
| Reverse current | $V_R=200\text{V}$ | $T_A=25^{\circ}\text{C}$ | I_R ²⁾ | 5 | 20 | μA |
| | | $T_A=125^{\circ}\text{C}$ | | - | 1.5 | mA |
| Typical junction capacitance | 4V, 1MHz | | C_J | 387 | | pF |

Notes: 1.Pulse test: 300 μs pulse width, 1% duty cycle

2.Pulse test: pulse width $\leq 40\text{ms}$

THERMAL CHARACTERISTICS

| Parameter | Symbol | TO-277 | Unit |
|------------------------------------------|-----------------|--------|----------------------|
| Typical thermal resistance ³⁾ | $R_{\theta JA}$ | 60.0 | $^{\circ}\text{C/W}$ |
| | $R_{\theta JL}$ | 3.0 | |

3 Units mounted on recommended PCB 1 oz. Pad layout

AVAILABLE PACK INFORMATION

| Product code | Pack | Reel Size (mm) | Quantity (pcs/reel) | Box Size L×W×H (mm) | Quantity (reel/box) | Carton Size L×W×H (mm) | Quantity (box/carton) |
|----------------|------|----------------|---------------------|---------------------|---------------------|------------------------|-----------------------|
| SP30200-TO-277 | T/R | $\phi 330$ | 5000 | 338×338×40 | 2 | 365×365×360 | 7 |

RATINGS AND CHARACTERISTIC OF SP30200

FIG.1-FORWARD CURRENT DERATING CURVE

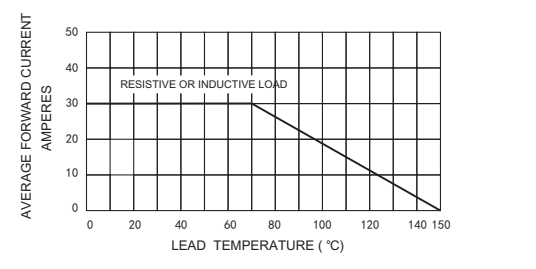


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

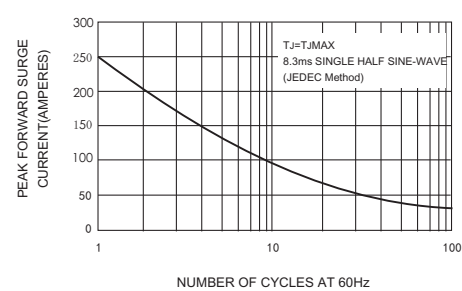


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

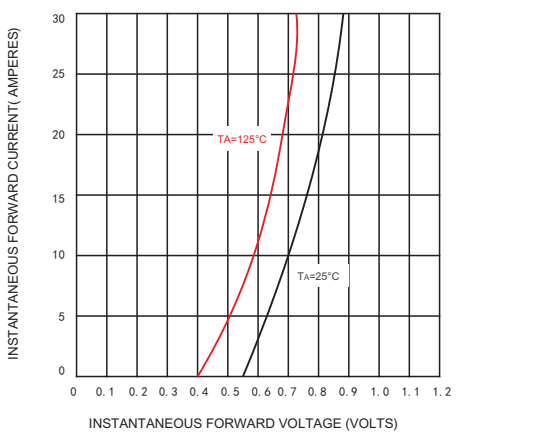


FIG.4-TYPICAL REVERSE CHARACTERISTICS

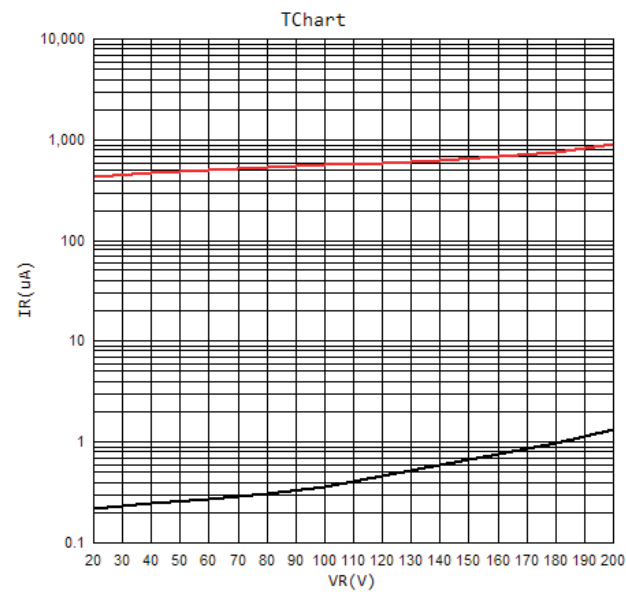


FIG.5-TYPICAL JUNCTION CAPACITANCE

