
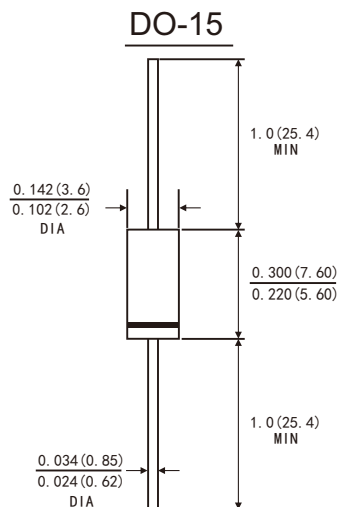


## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU



Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: JEDEC DO-15 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: color band denotes cathode end
- Mounting Position: Any
- Weight: 0.014ounce, 0.39 gram

## TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

### PRIMARY CHARACTERISTICS

|                              |         |
|------------------------------|---------|
| $I_F(AV)$                    | 3.0A    |
| $V_{RRM}$                    | 40V、45V |
| $I_{FSM}$                    | 80A     |
| $V_F$ at $I_F=3.0A$<br>125°C | 0.31V   |
| $T_{JMAX}$                   | 150°C   |

## MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified )

| Parameter  | Symbol    | SR340SL、SR345SL | Unit |
|--|-----------|-----------------|------|
| Maximum repetitive peak reverse voltage  | $V_{RRM}$ | 40 45           | V    |
| Maximum average forward rectified current<br>0.375"(9.5mm) lead length(see fig.1)                                  | $I_F(AV)$ | 3.0             | A    |
| Peak forward surge current 8.3ms single half<br>sine-wave superimposed on rated load<br>(JEDEC method at rated TL) | $I_{FSM}$ | 80              | A    |
| Operating junction temperature range   | $T_J$     | -55 to+150      | °C   |
| Storage temperature range  | $T_{stg}$ | -55 to+150      | °C   |

# RATINGS AND CHARACTERISTIC OF SR340SL、SR345SL

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25℃ Unless otherwise noted)

| Parameter                     | Test Conditions        |                      | Symbol                       | TYP. | MAX. | Unit |
|-------------------------------|------------------------|----------------------|------------------------------|------|------|------|
| Instantaneous forward voltage | I <sub>F</sub> =3.0A   | T <sub>A</sub> =25℃  | V <sub>F</sub> <sup>1)</sup> | 0.40 | 0.43 | V    |
|                               |                        | T <sub>A</sub> =100℃ |                              | 0.33 | —    |      |
|                               |                        | T <sub>A</sub> =125℃ |                              | 0.31 | —    |      |
|                               | I <sub>F</sub> =1.0A   | T <sub>A</sub> =25℃  |                              | 0.33 | —    |      |
|                               |                        | T <sub>A</sub> =100℃ |                              | 0.24 | —    |      |
|                               |                        | T <sub>A</sub> =125℃ |                              | 0.21 | —    |      |
| Reverse current               | V <sub>R</sub> =40/45V | T <sub>A</sub> =25℃  | I <sub>R</sub> <sup>2)</sup> | 50   | 200  | μA   |
|                               |                        | T <sub>A</sub> =100℃ |                              | 5    | —    | mA   |
|                               |                        | T <sub>A</sub> =125℃ |                              | 20   | —    |      |
| Typical junction capacitance  | 4V, 1MHz               |                      | C <sub>J</sub>               | 240  |      | pF   |

Notes: 1.Pulse test: 300 μs pulse width, 1% duty cycle  
2.Pulse test: pulse width ≤ 40ms

## THERMAL CHARACTERISTICS

| Parameter                                | Symbol           | SR340SL、SR345SL | Unit |
|--|------------------|-----------------|------|
| Typical thermal resistance <sup>3)</sup> | R <sub>θJA</sub> | 35.0            | ℃/W  |
|  | R <sub>θJL</sub> | 15.0            |      |

3.Thermal resistance from junction to lead vertical P.C.B. mounted , 0.375"(9.5mm)lead length

## AVAILABLE PACK INFORMATION

| Product code  | Pack | Box Size L*W*H(mm) | Quantity(pcs/box) | Carton SizeL*W*H(mm) | Quantity(box/carton) |
|---------------|------|--------------------|-------------------|----------------------|----------------------|
| SR340SL-DO-15 | B/P  | 190*80*21          | 500               | 433*203*230          | 50                   |
| SR340SL-DO-15 | T/B  | 264*74*135         | 3000              | 400*267*286          | 10                   |
| SR345SL-DO-15 | B/P  | 190*80*21          | 500               | 433*203*230          | 50                   |
| SR345SL-DO-15 | T/B  | 264*74*135         | 3000              | 400*267*286          | 10                   |

# RATINGS AND CHARACTERISTIC OF SR340SL、SR345SL

FIG.1-FORWARD CURRENT DERATING CURVE

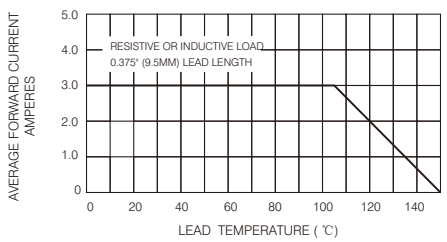


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

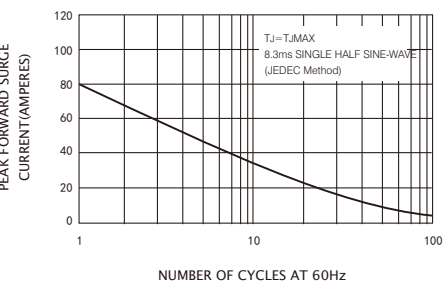


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

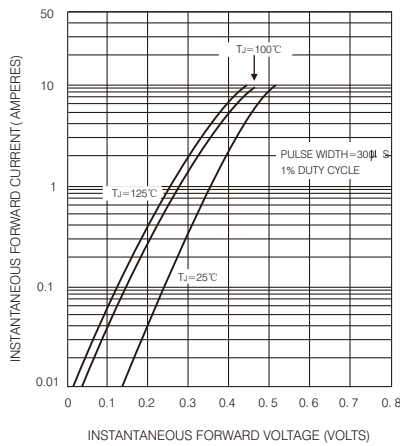


FIG.4-TYPICAL REVERSE CHARACTERISTICS

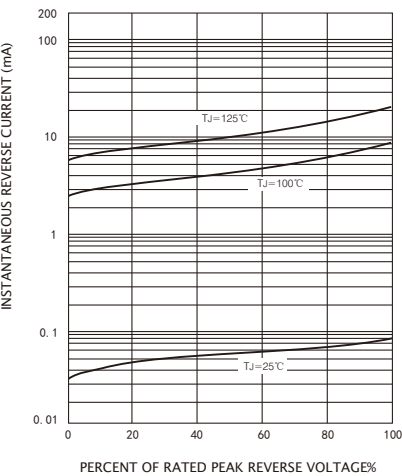


FIG.5-TYPICAL JUNCTION CAPACITANCE

