

FEATURES


- Glass passivated junction
- For Surface Mount Applications, Easy to pick and place
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low forward voltage drop
- High current capability, High reliability
- Low power loss, high efficiency
- High surge current capability
- High speed switching, Low leakage
- High temperature soldering guaranteed: 260°C/10 seconds at terminals,
- Component in accordance to RoHS 2015/863/EU



RoHS
COMPLIANT

SMC(DO-214AB)



Cathode  Anode

MECHANICAL DATA

- Case: JEDEC SMC(DO-214AB) molded plastic body
- Terminals: solder plated, solderable per MIL-STD-750, method 2026
- Polarity: color band denotes cathode end
- Weight: 0.007ounce, 0.21 gram

TYPICAL APPLICATIONS

For use in low voltage, high frequency inverters, DC/DC converters, free wheeling, and polarity protection applications

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified, Single phase, half wave, 60HZ, resistive or inductive load.
For capacitive load, derate current by 20%.)

Parameters		Symbols	ES5AC	ES5BC	ES5DC	ES5FC	ES5GC	ES5JC	ES5KC	Units
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	300	400	600	800	V
Maximum RMS Voltage		V _{RMS}	35	70	140	210	280	420	560	V
Maximum DC Blocking Voltage		V _{DC}	50	100	200	300	400	600	800	V
Maximum Average Forward Rectified Current		I _{F(AV)}	5.0							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	150							A
Maximum Instantaneous Forward Voltage at 5.0A		V _F	0.95			1.3		1.7	2.0	V
Maximum DC Reverse Current at rated DC blocking voltage	T _A =25°C	I _R	5.0							μA
	T _A =125°C		100							
Maximum reverse recovery time(Note1)		t _{rr}	35							ns
Typical junction capacitance(Note2)		C _j	38							pF
Typical Thermal Resistance(Note3)		R _{θJA}	47							°C/W
		R _{θJL}	12							
Operating junction and storage temperature range		T _J , T _{STG}	-55 to+150							°C

Note: 1. Test conditions: $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$.

2. Measured at 1MHZ and applied reverse voltage of 4.0 Volts.

3. Units mounted on PCB with 0.31" x 0.31" (8.0 mm x 8.0 mm) copper pad areas

JINAN JINGHENG ELECTRONICS CO., LTD.

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

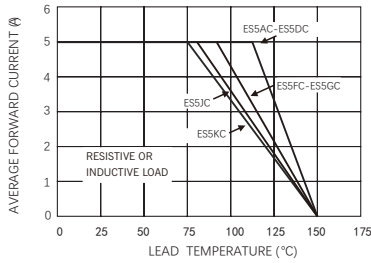


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

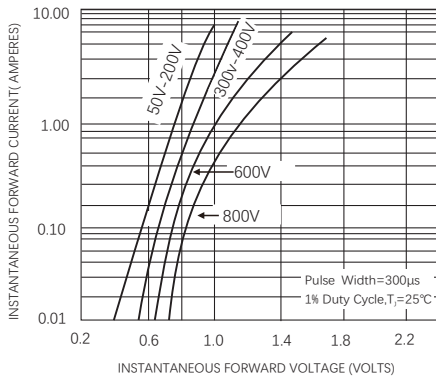


FIG.5-TYPICAL JUNCTION CAPACITANCE

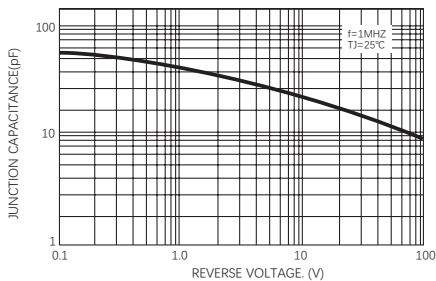


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

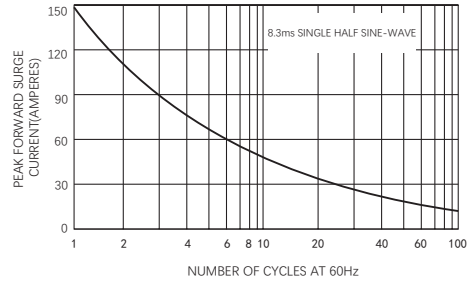


FIG.4-TYPICAL REVERSE CHARACTERISTICS


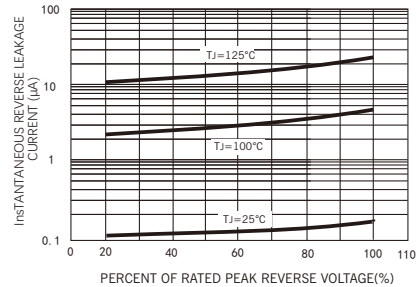


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

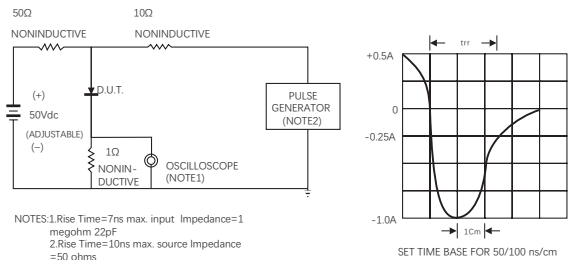


AVAILABALE PACK INFORMATION

Product code	Pack	Reel Size (mm)	Quantity (pcs/reel)	Box Size L×W×H (mm)	Quantity (reel/box)	Carton Size L×W×H (mm)	Quantity (box/carton)	Quantity (carton) (K)
ES5AC...ES5KC-SMC	T/R	Φ330	3000	338×338×39	2	370×370×360	8	48


PACKAGE OUTLINE DIMENSIONS

SMC(DO-214AB)

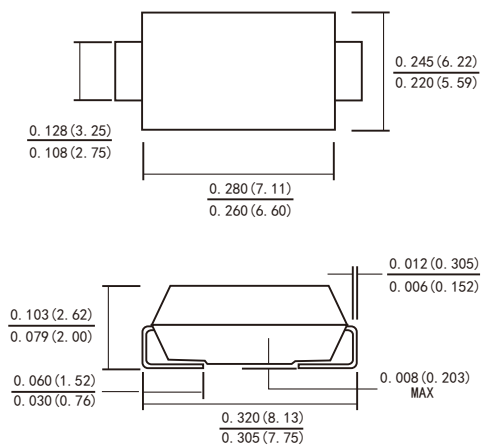

Dimensions in inches and (millimeters)

Suggested PAD Layout



Friendship Reminder

- JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.
- JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of JH.
- JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.