


## Features

- 300 Watts peak pulse power ( $tp = 8/20\mu s$ )
- Unidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2  $\pm 8kV$  contact  $\pm 15kV$  air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 8A (8/20 $\mu s$ )

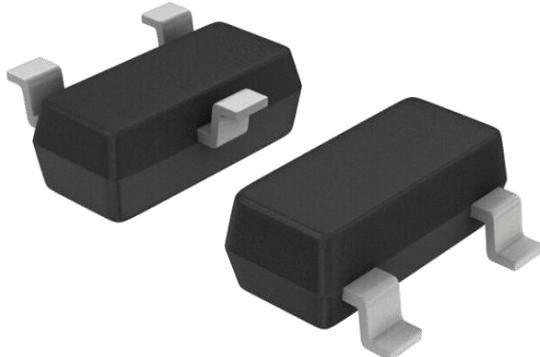



## Applications

- Dataline
- Automatic Teller Machines
- Net works
- Power line

## Mechanical Data

- SOT-23 package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

## Schematic & PIN Configuration

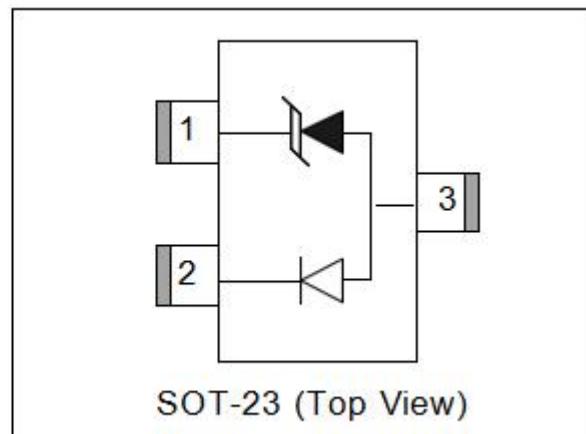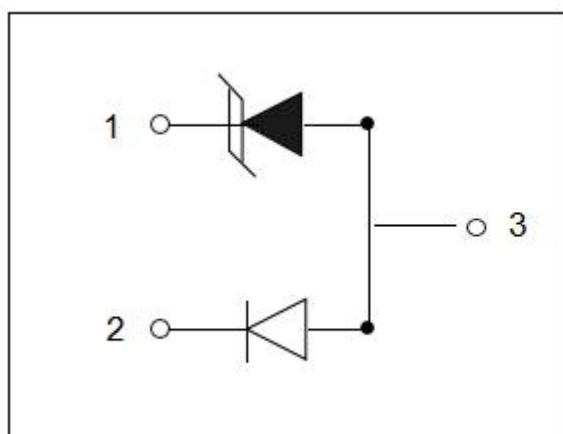

**Absolute Maximum Rating**


| Rating   | Symbol    | Value          | Units |
|--|-----------|----------------|-------|
| Peak Pulse Power ( $t_p = 8/20\mu s$ )                         | $P_{PP}$  | 300            | Watts |
| Peak Pulse Current ( $t_p = 8/20\mu s$ ) (note1)               | $I_{PP}$  | 8              | A     |
| ESD per IEC 61000-4-2 (Air)<br>ESD per IEC 61000-4-2 (Contact) | $V_{ESD}$ | 15<br>8        | kV    |
| Lead Soldering Temperature                                     | $T_L$     | 260(10seconds) | °C    |
| Junction Temperature   | $T_J$     | -55 to + 125   | °C    |
| Storage Temperature  | $T_{stg}$ | -55 to + 125   | °C    |

**Electrical Characteristics**

| Parameter                 | Symbol    | Conditions                     | Min  | Typical | Max  | Units   |
|---------------------------|-----------|--------------------------------|------|---------|------|---------|
| Reverse Stand-Off Voltage | $V_{RWM}$ |                                |      |         | 15.0 | V       |
| Reverse Breakdown Voltage | $V_{BR}$  | $I_T = 1mA$                    | 16.7 |         |      | V       |
| Reverse Leakage Current   | $I_R$     | $V_{RWM} = 15V, T = 25°C$      |      | 0.1     | 0.5  | $\mu A$ |
| Peak Pulse Current        | $I_{PP}$  | $t_p = 8/20\mu s$              |      |         | 8    | A       |
| Clamping Voltage          | $V_C$     | $I_{PP} = 8A, t_p = 8/20\mu s$ |      |         | 40   | V       |
| Junction Capacitance      | $C_j$     | $V_R = 0V, f = 1MHz$           |      | 0.5     |      | pF      |

**Electrical Parameters (TA = 25°C unless otherwise noted)**


| Symbol    | Parameter                                   |
|-----------|---|
| $I_{PP}$  | Maximum Reverse Peak Pulse Current          |
| $V_C$     | Clamping Voltage @ $I_{PP}$                 |
| $V_{RWM}$ | Working Peak Reverse Voltage                |
| $I_R$     | Maximum Reverse Leakage Current @ $V_{RWM}$ |
| $V_{BR}$  | Breakdown Voltage @ $I_T$                   |
| $I_T$     | Test Current                                |
|           |   |
|           |   |

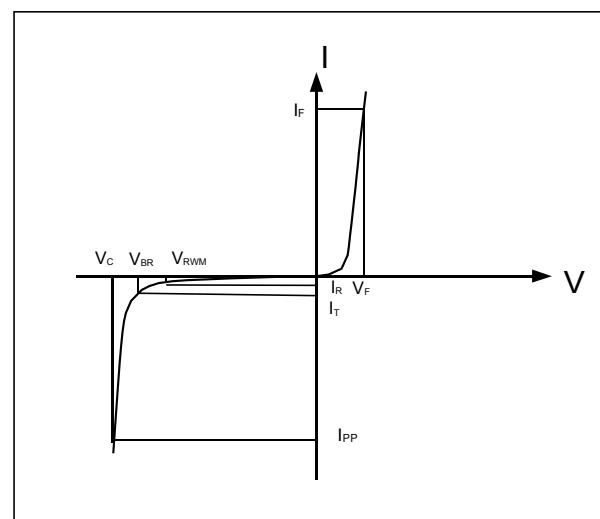


Note: 8/20μs pulse waveform.

## Typical Characteristics


**Figure 1: Peak Pulse Power vs. Pulse Time**

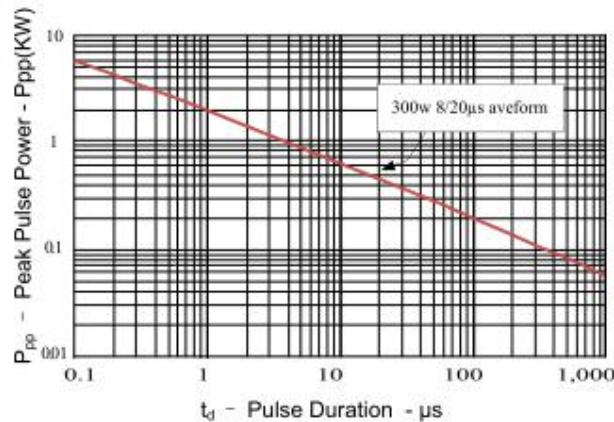


**Figure 2: Power Derating Curve**

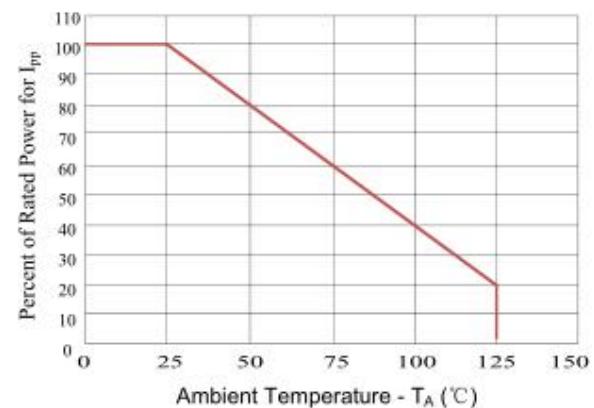


**Figure 3: Pulse Waveform**

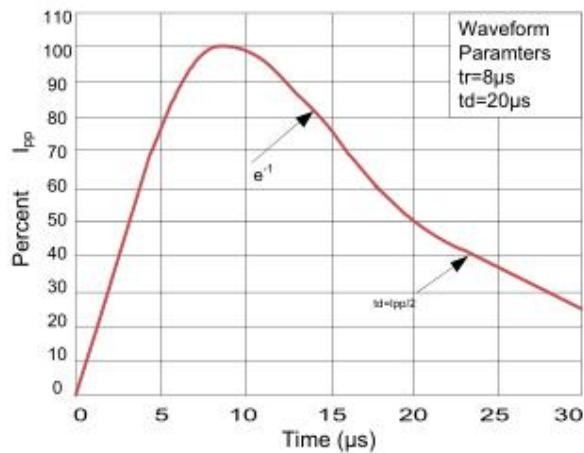

**Figure 4: Clamping Voltage vs.Ipp**

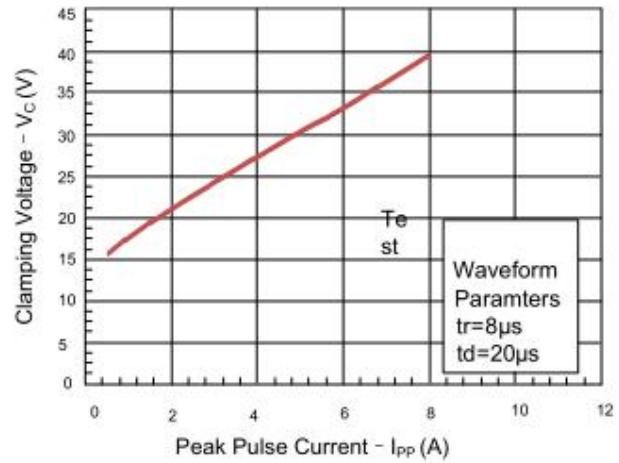


## Outline Drawing – SOT-23

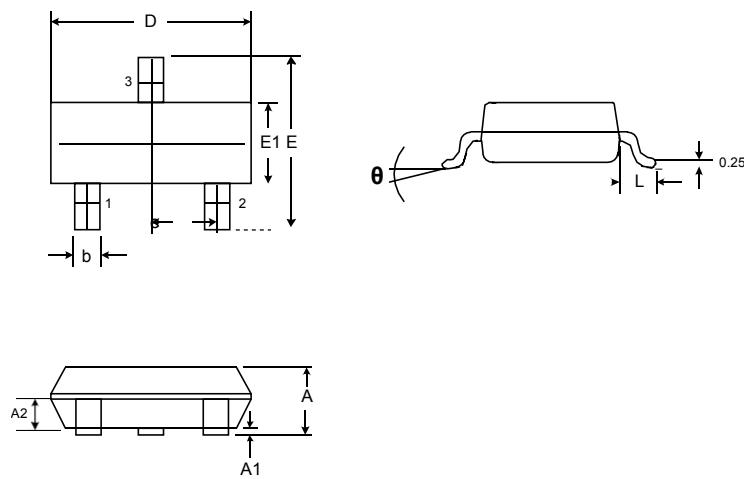

| SYMBOL | MILLIMETER |      | INCHES     |        |
|--------|------------|------|------------|--------|
|        | MIN        | MAX  | MIN        | MAX    |
| A      | 0.89       | 1.13 | 0.035      | 0.044  |
| A1     | 0.015      | 0.11 | 0.0006     | 0.0043 |
| A2     | 0.60       | 0.70 | 0.0236     | 0.0275 |
| D      | 2.72       | 3.12 | 0.1070     | 0.1228 |
| E      | 2.60       | 3.00 | 0.1024     | 0.118  |
| E1     | 1.40       | 1.80 | 0.0551     | 0.0709 |
| e      | 0.95 BSC   |      | 0.0374 BSC |        |
| L      | 0.30       | 0.60 | 0.0118     | 0.0236 |
| θ      | 0          | 8°   | 0          | 8°     |

## Marking



## Ordering information

| Order code    | Package | Base qty | Delivery mode |
|---------------|---------|----------|---------------|
| ESDT23A15V02R | SOT-23  | 3k       | Tape and reel |