



S E M I C O N D U C T O R

# SR90200PT


SCHOTTKY BARRIER RECTIFIER  
Reverse Voltage - 200 Volts  
Forward Current - 90.0Amperes

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- Dual rectifier construction
- High temperature soldering guaranteed:260 °C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2011/65/EU

## MECHANICAL DATA

- Case: TO-247AB molded plastic body
- Terminals: Lead solderable per MIL-STD-750,method 2026
- Polarity: As marked.
- Mounting Position: Any

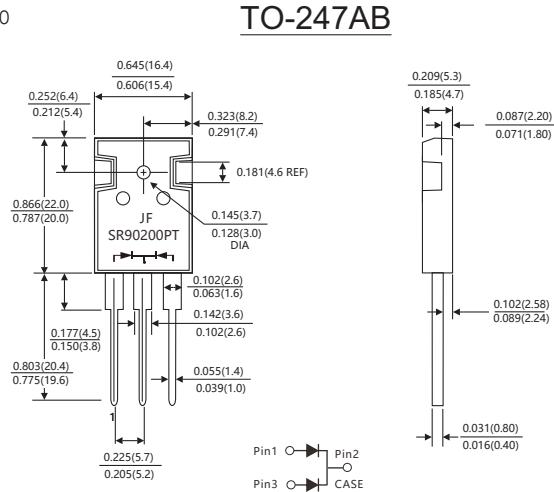

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

|  |                       | Symbols           | SR<br>90200PT |      |      |      | Units |
|--|-----------------------|-------------------|---------------|------|------|------|-------|
| Maximum repetitive peak reverse voltage  |                       | V <sub>RRM</sub>  | 200           |      |      |      | Volts |
| Maximum RMS voltage  |                       | V <sub>RMS</sub>  | 140           |      |      |      | Volts |
| Maximum DC blocking voltage  |                       | V <sub>DC</sub>   | 200           |      |      |      | Volts |
| Maximum average forward rectified current (see Fig.1)  | Per leg               | I <sub>(AV)</sub> | 45.0<br>90.0  |      |      |      | Amps  |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method) |                       | I <sub>FSM</sub>  | 460.0         |      |      |      | Amps  |
| Forward voltage at 45.0 A per leg(Notes 1 )  |                       | V <sub>F</sub>    | TYP.          | 0.94 | MAX. | 0.96 | Volts |
| Maximum instantaneous reverse current at rated DC blocking voltage(Notes 1)                      | T <sub>A</sub> =25°C  | I <sub>R</sub>    | TYP.          | -    | MAX. | 100  | µA    |
|  | T <sub>A</sub> =125°C |                   | TYP.          | -    | MAX. | 3.5  | mA    |
| Typical thermal resistance (Notes 2)   |                       | R <sub>θJC</sub>  | 0.23          |      |      |      | °C/W  |
| Operating junction temperature range   |                       | T <sub>J</sub>    | -55 to+175    |      |      |      | °C    |
| Storage temperature range  |                       | T <sub>STG</sub>  | -55 to+175    |      |      |      | °C    |

Notes: 1.Pulse test: 300 µ s pulse width,1% duty cycle

2.Thermal resistance from junction to case

## RATINGS AND CHARACTERISTIC CURVES SR90200PT

FIG.1-FORWARD CURRENT DERATING CURVE

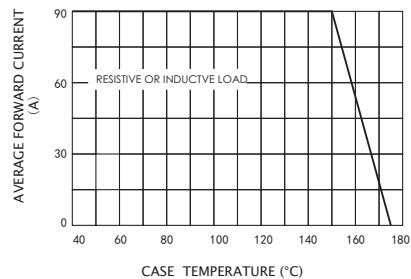


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

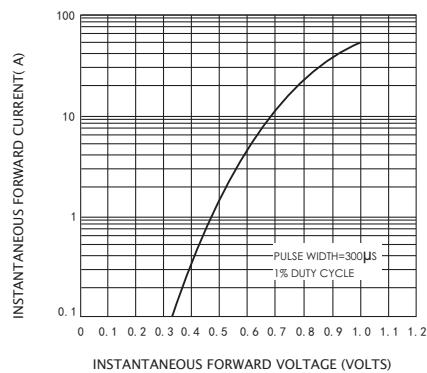


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

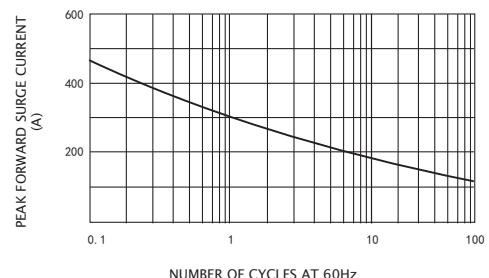


FIG.4-TYPICAL REVERSE CHARACTERISTICS

