


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2011/65/Eu and WEEE 2012/19/EU

MECHANICAL DATA

- Case: JEDEC TO-263AC molded plastic body
- Terminals: Solderable per MIL-STD-202,method 208
- Polarity: As marked
- Mounting Position: Any
- Weight: 1.35 gram (approximately)

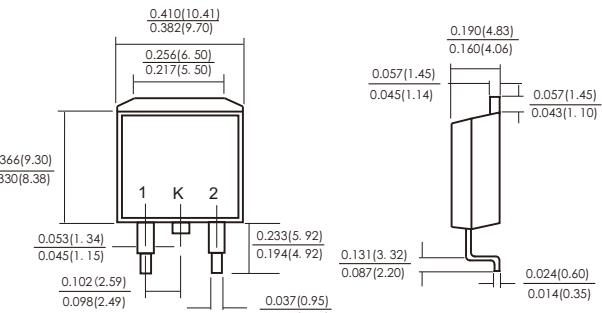

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	SB3045DY	Units
Maximum repetitive peak reverse voltage	V _{RRM}	45	Volts
Maximum RMS voltage	V _{RMS}	31.5	Volts
Maximum DC blocking voltage	V _{DC}	45	Volts
Maximum average forward rectified current See Fig. 1	I _(AV)	30.0	Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	300	Amps
Maximum instantaneous forward voltage at 30.0 A	V _F	0.55	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1) T _c =25°C	I _R	250	µ A
		50	mA
Typical thermal resistance (Note 2)	R _{θJC}	1.5	°C/W
Storage temperature range	T _{STG}	-55 to+200	°C
Operating junction temperature range at reduced reverse voltage V _R <=80%V _{RRM} in DC forward model	T _J	-55 to+150 -55 to+200	°C

Notes: 1.Pulse test: 300 µs pulse width,1% duty cycle

2.Thermal resistance from junction to case

RATINGS AND CHARACTERISTIC CURVES SB3045DY

FIG.1-FORWARD CURRENT DERATING CURVE

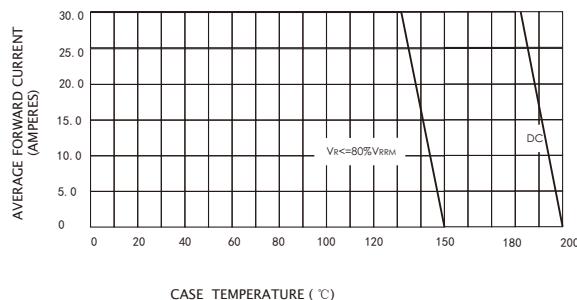


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

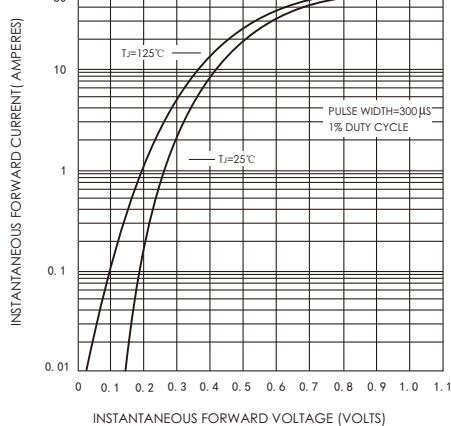


FIG.5-TYPICAL JUNCTION CAPACITANCE

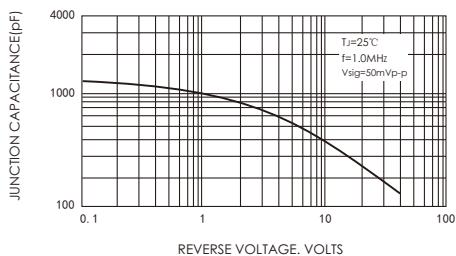


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

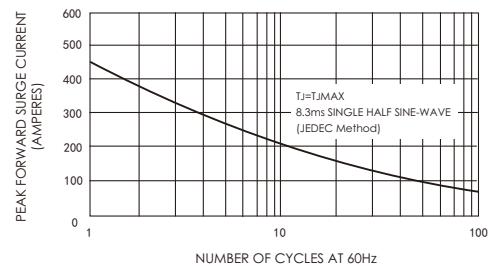


FIG.4-TYPICAL REVERSE CHARACTERISTICS

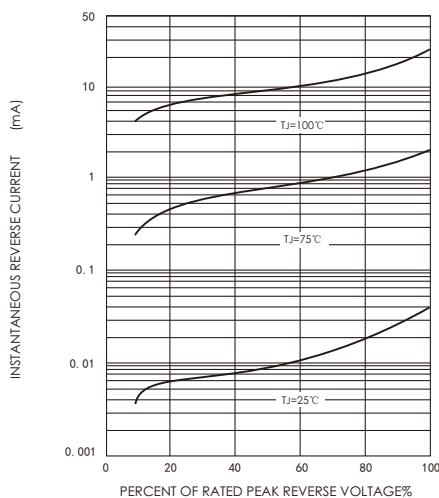


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

