



S E M I C O N D U C T O R

SR520M2 THRU SR5200M2

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts

Forward Current - 5.0 Amperes

FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- High current capability, Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case
- Component in accordance to RoHS 2011/65/EU

MECHANICAL DATA

- Case: JEDEC TO-252 molded plastic body
- Terminals: Solderable per MIL-STD-202, method 208
- Polarity: As marked
- Mounting Position: Any

TO-252

(DPAK)

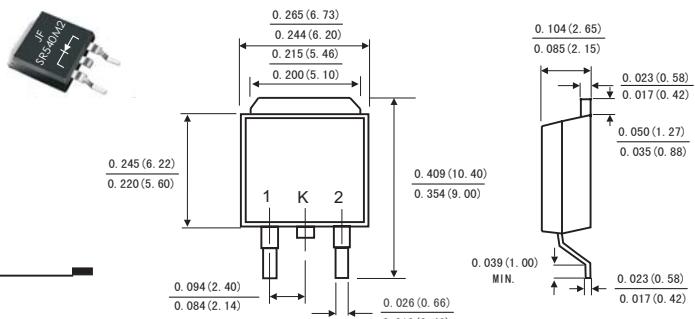

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave, resistive or inductive load. For capacitive load, derate by 20%.)

	Symbols	SR 520M2	SR 530M2	SR 540M2	SR 560M2	SR 5100M2	SR 5150M2	SR 5200M2	Units
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	60	100	150	200	Volts
Maximum RMS voltage	V _{RMS}	14	21	28	42	71	105	140	Volts
Maximum DC blocking voltage	V _{DC}	20	30	40	60	100	150	200	Volts
Maximum average forward rectified current (see fig.1)	I _(AV)					5.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}					150.0			Amps
Maximum instantaneous forward voltage at 5.0 A (Note 1)	V _F		0.55		0.70	0.85	0.90	0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	T _A =25°C			200		50			µA
	T _A =100°C			5		—			mA
	T _A =125°C			—		5			
Typical junction capacitance (Note 2)	C _J		500			400			pF
Typical thermal resistance	R _{θJC}				2.5				°C/W
Operating junction temperature range	T _J				-55 to +150				°C
Storage temperature range	T _{STG}				-55 to +150				°C

Notes: 1. Pulse test: 300 µs pulse width, 1% duty cycle

2. Measured at 1MHz and reverse voltage of 4.0volts

RATINGS AND CHARACTERISTIC CURVES SR520M2 THRU SR5200M2

FIG.1-FORWARD CURRENT DERATING CURVE

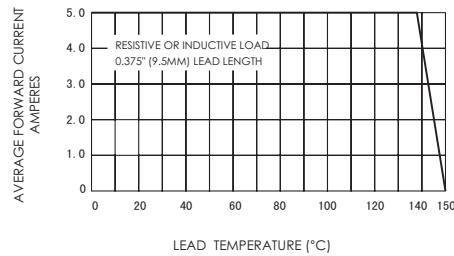


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


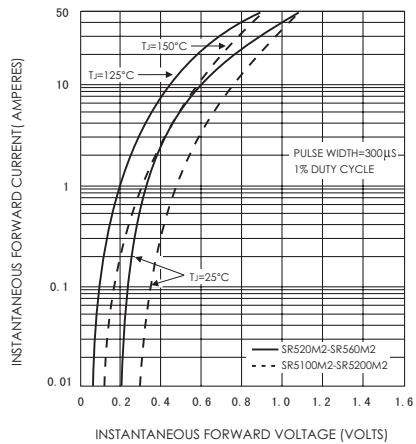


FIG.5-TYPICAL JUNCTION CAPACITANCE

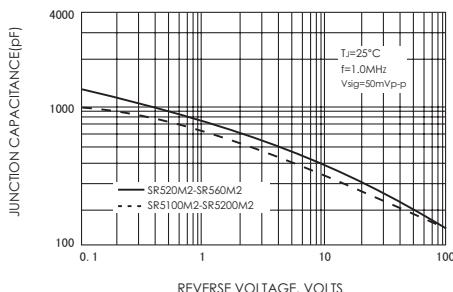

JINAN JINGHENG ELECTRONICS CO., LTD.

FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

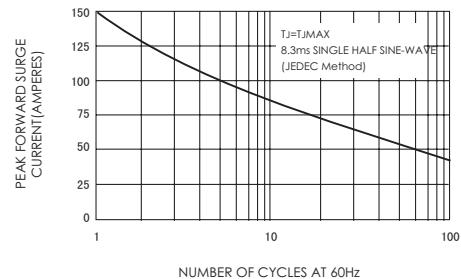


FIG.4-TYPICAL REVERSE CHARACTERISTICS

