



# SR220 THRU SR2200


SCHOTTKY BARRIER RECTIFIER  
Reverse Voltage - 20 to 200 Volts  
Forward Current - 2.0Amperes

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU



DO-15

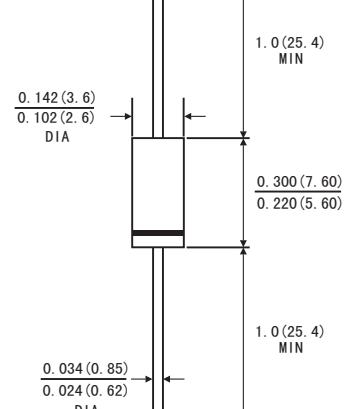

Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: JEDEC DO-15 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: color band denotes cathode end
- Mounting Position: Any
- Weight: 0.014ounce, 0.39 gram

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	SR 220	SR 230	SR 240	SR 260	SR 2100	SR 2150	SR 2200	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	60	100	150	200	Volts
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	42	71	105	140	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	60	100	150	200	Volts
Maximum average forward rectified current	I <sub>(AV)</sub>				2.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>				50.0				Amps
Maximum instantaneous forward voltage at 2.0 A(Note 1 )	V <sub>F</sub>		0.55		0.70	0.85	0.90	0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1 )	T <sub>A</sub> =25°C	I <sub>R</sub>		100		20			µA
	T <sub>A</sub> =100°C			5.0		-			mA
	T <sub>A</sub> =125°C			-		3.0			
Typical junction capacitance(Note 3)	C <sub>J</sub>			170					pF
Typical thermal resistance(Note 2)	R <sub>θJA</sub>			35.0					°C/W
Operating junction temperature range	T <sub>J</sub>			-55 to+150					°C
Storage temperature range	T <sub>STG</sub>			-55 to+150					°C

Notes: 1.Pulse test: 300 µ s pulse width,1% duty cycle

2.Thermal resistance from junction to lead, and/or to ambient P.C.B. mounted with 0.375"(9.5mm) lead length with 1.5 X1.5"(38X38mm)copper pads

3.Measured at 1.0MHz and reverse voltage of 4.0 volts

## RATINGS AND CHARACTERISTIC CURVES SR220 THRU SR2200

FIG.1-FORWARD CURRENT DERATING CURVE

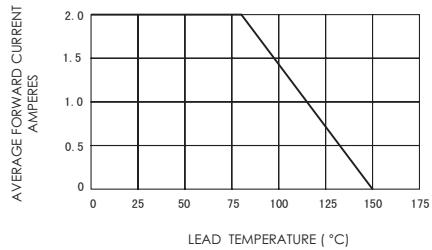


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

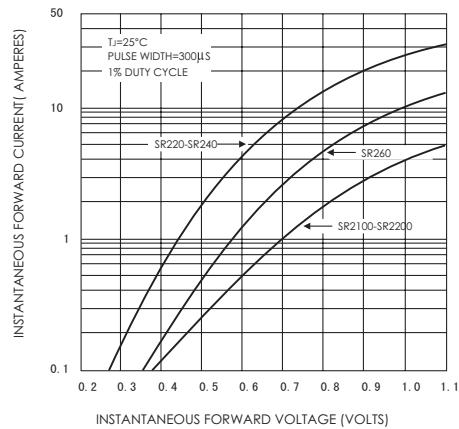


FIG.5-TYPICAL JUNCTION CAPACITANCE

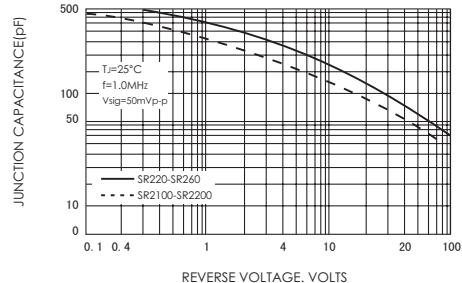


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

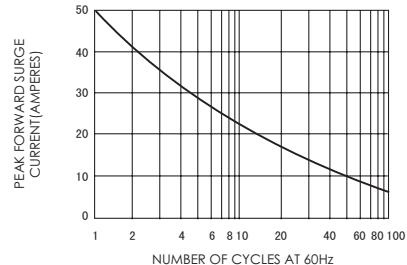


FIG.4-TYPICAL REVERSE CHARACTERISTICS

