
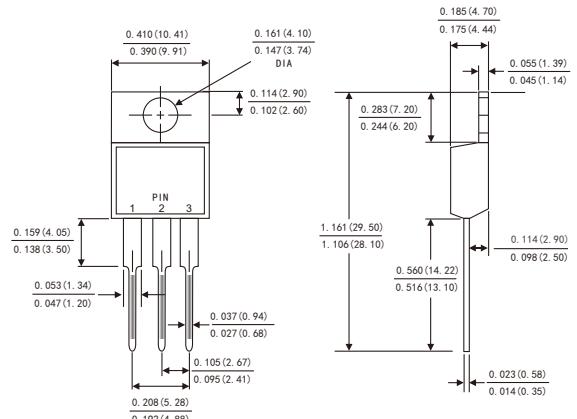


## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- For use in low voltage ,high frequency inverters,
- free wheeling ,and polarity protection applications
- Dual rectifier construction
- High temperature soldering guaranteed:260 °C/10 seconds.,
- 0.25'(6.35mm)from case
- Component in accordance to RoHS 2011/65/EU


**TO-220AB**


Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: JEDEC TO-220AB molded plastic body
- Terminals: Lead solderable per MIL-STD-750,method 2026
- Polarity: As marked
- Mounting Position: Any

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

Parameters	Symbols	SR 1020CT	SR 1030CT	SR 1040CT	SR 1045CT	SR 1060CT	SR 10100CT	SR 10150CT	SR 10200CT	Units			
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	45	60	100	150	200	Volts			
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	32	42	70	105	140	Volts			
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	40	60	100	150	200	Volts			
Maximum average forward rectified current (see Fig.1)	I <sub>(AV)</sub>	5.0 10.0								Amps			
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150.0								Amps			
Maximum instantaneous forward voltage at 5.0 A per leg(Notes 1 )	V <sub>F</sub>	0. 60		0.75	0.85	0.90	0.95			Volts			
Maximum instantaneous reverse current at rated DC blocking voltage(Notes 1)	T <sub>A</sub> =25°C	100			30					μ A			
	T <sub>A</sub> =100°C	5			-					mA			
	T <sub>A</sub> =125°C	-			3								
Typical thermal resistance (Notes 2)	R <sub>AJC</sub>	2.5								°C/W			
Operating junction temperature range	T <sub>J</sub>	-55 to+150								°C			
Storage temperature range	T <sub>STG</sub>	-55 to+150								°C			

**Notes:** 1.Pulse test: 300μs pulse width,1% duty cycle

2.Thermal resistance from junction to case

# RATINGS AND CHARACTERISTIC CURVES SR1020CT THRU SR10200CT

FIG.1-FORWARD CURRENT DERATING CURVE

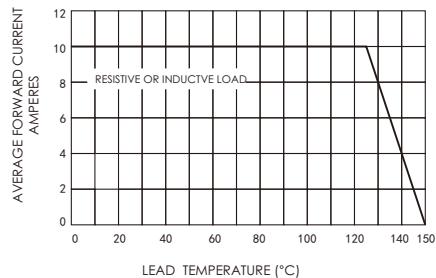


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

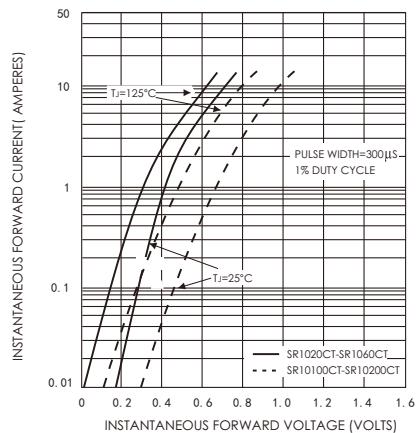


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

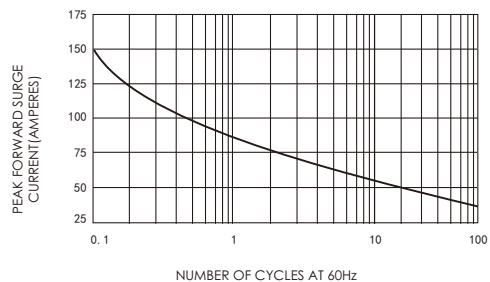


FIG.4-TYPICAL REVERSE CHARACTERISTICS

