



FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU



DO-201AD

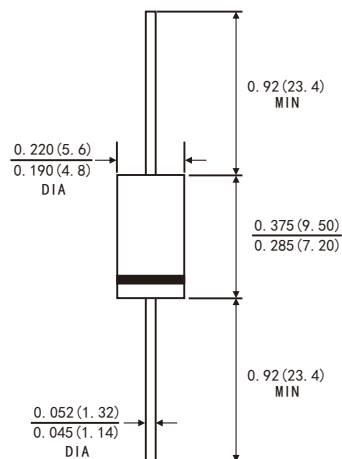

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: JEDEC DO-201AD molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: color band denotes cathode end
- Mounting Position: Any
- Weight: 0.041ounce, 1.15 grams

TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

PRIMARY CHARACTERISTICS	
$I_F(AV)$	10.0A
V_{RRM}	50V
I_{FSM}	150A
V_F at $I_F=10A \cdot 125^\circ C$	0.35V
T_{JMAX}	150°C

MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	V
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	$I_F(AV)$	10.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I_{FSM}	150	A
Operating junction temperature range	T_J	-55 to +150	°C
Storage temperature range	T_{stg}	-55 to +150	°C

RATINGS AND CHARACTERISTIC OF SR1050L

ELECTRICAL CHARACTERISTICS (T_A=25℃ Unless otherwise noted)

Parameter	Test Conditions		Symbol	Typ.	Max.	Unit
Instaneous forward voltage	I _F =10.0A	T _A =25℃	V _F ¹⁾	0.43	0.47	V
		T _A =100℃		0.37	-	
		T _A =125℃		0.35	-	
Reverse current	V _R =50V	T _A =25℃	I _R ²⁾	20	100	μ A
		T _A =100℃		-	15	mA
		T _A =125℃		-	50	
Typical junction capacitance	4V, 1MHz		C _J	3.7		nF

Notes: 1.Pulse test: 300 μ s pulse width,1% duty cycle
2.Pulse test: pulse width≤40ms

THERMAL CHARACTERISTICS

Parameter	Symbol	SR1050L	Unit
Typical thermal resistance ³⁾	R _{θJA}	25.0	℃/W
	R _{θJL}	8.0	

3.Thermal resistance from junction to lead vertical P.C.B. mounted , 0.375"(9.5mm)lead length

AVAILABALE PACK INFORMATION

Product code	Pack	Box Size L*W*H (mm)	Quantity (pcs/box)	Carton SizeL*W*H (mm)	Quantity (box/carton)
SR1050L-DO-201AD	B/P	190*80*21	200	433*203*230	50
SR1050L-DO-201AD	T/B	264*74*135	1000	400*267*286	10

RATINGS AND CHARACTERISTIC OF SR1050L

FIG.1-FORWARD CURRENT DERATING CURVE

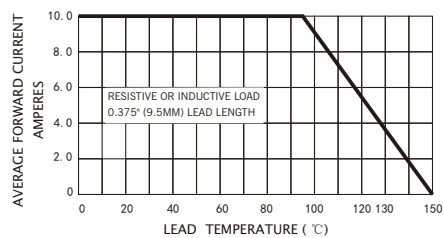


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

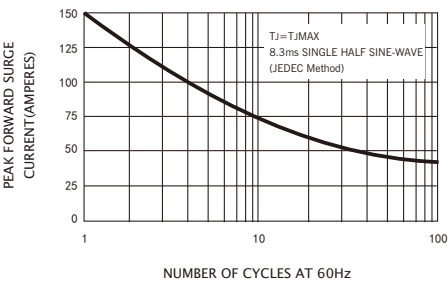


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

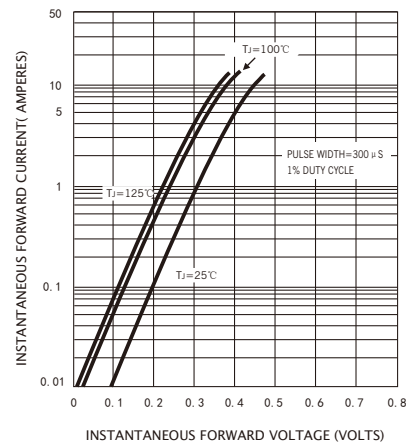


FIG.4-TYPICAL REVERSE CHARACTERISTICS

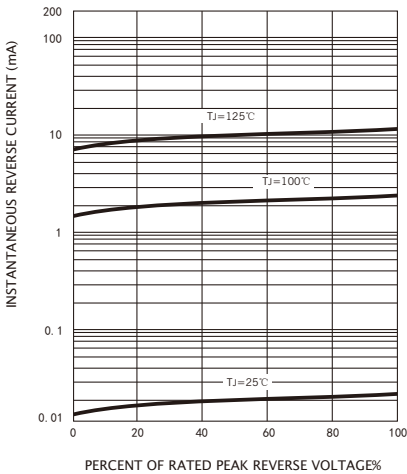


FIG.5-TYPICAL JUNCTION CAPACITANCE

