


FEATURES


- Epoxy meets UL-94 V-0 flammability rating
- Power Dissipation of 200mW
- Low Collector Current

SOT-23



MECHANICAL DATA

- Case: SOT-23(TO-236)
- Terminals: Plated solderable per MIL-STD-750, method 2026
- Mounting Position: Any
- Marking: 2SA1037-Q: FQ
2SA1037-R: FR
2SA1037-S: FS



MAXIMUM RATINGS($T_A=25^{\circ}\text{C}$ Unless otherwise specified)

Parameter	Symbol	Unit	Value
Collector-Emitter Voltage	V_{CEO}	V	-50
Collector-Base Voltage	V_{CBO}	V	-60
Emitter-Base Voltage	V_{EBO}	V	-6.0
Collector Current, Continuous	I_C	mA	-150
Power Dissipation	P_D	mW	200
Operation Junction Temperature	T_J	$^{\circ}\text{C}$	-55 to +150
Storage Temperature	T_{STG}	$^{\circ}\text{C}$	-55 to +150
Thermal resistance From junction to ambient	$R_{\theta JA}$	$^{\circ}\text{C}/\text{W}$	625

ELECTRICAL CHARACTERISTICS($T_A=25^{\circ}\text{C}$ Unless otherwise specified)

Parameter	Symbol	Unit	Conditions	Min	Max
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	V	$I_C=-1\text{mA}, I_B=0$	-50	---
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	V	$I_C=-50\mu\text{A}, I_E=0$	-60	---
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	V	$I_E=-50\mu\text{A}, I_C=0$	-6.0	---
Collector cut-off Current	I_{CBO}	nA	$V_{CB}=-60\text{V}, I_E=0$	---	-100
Emitter cut-off Current	I_{EBO}	nA	$V_{EB}=-6\text{V}, I_C=0$	---	-100
DC Current Gain	h_{FE}		$I_C=-1\text{mA}, V_{CE}=-6\text{V}$	120	560
Collector-Emitter Saturation Voltage	$V_{CE(\text{set})}$	V	$I_C=-50\text{mA}, I_B=-5\text{mA}$	---	-0.5
Output Capacitance	C_{ob}	pF	$V_{CB}=-12\text{V}, f=1.0\text{MHz}, I_E=0$	4.0(Typ)	5.0
Current Gain-Bandwidth Product	f_T	MHZ	$I_C=-2\text{mA}, V_{CE}=-12\text{V}$ $f=30\text{MHz}$	140(Typ)	---







CLASSIFICATION OF h_{FE}



Rank	Q	R	S
Range	120-270	180-390	270-560
Marking	FQ	FR	FS

AVAILABLE PACK INFORMATION

Product code	Pack	Reel Size (mm)	Quantity (Pcs/reel)	Quantity (pcs/box)	Quantity (pcs/carton)
2SA1037	T/R	$\Phi 180$	3K	30K	120K


Characteristics(Typical)

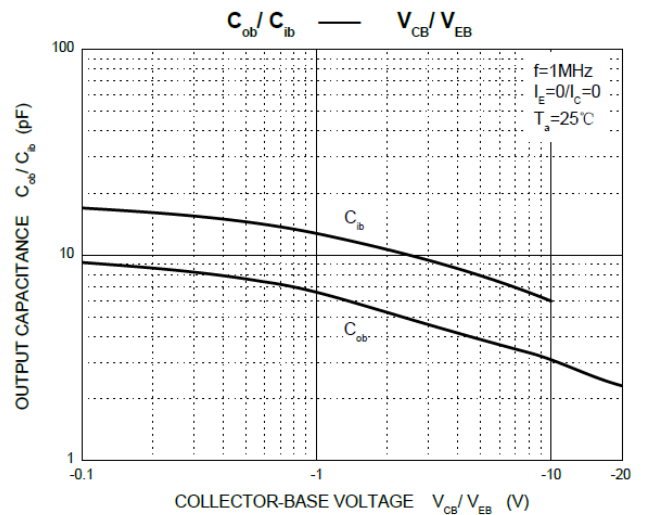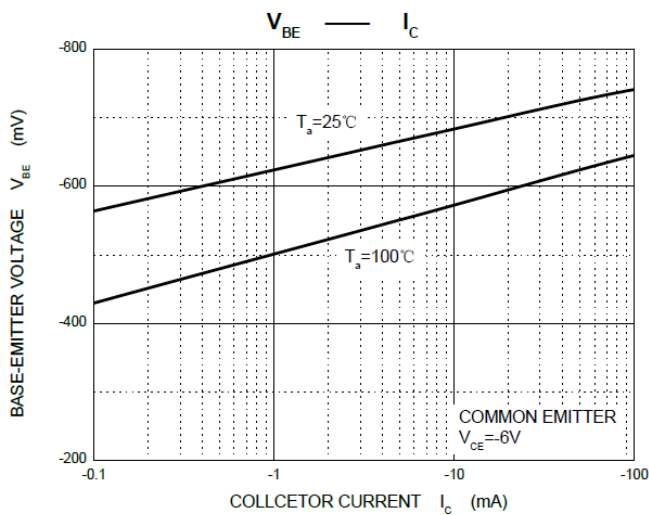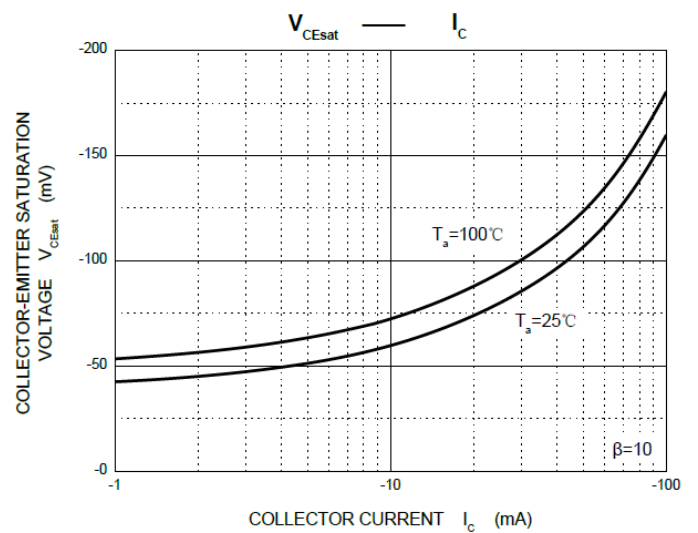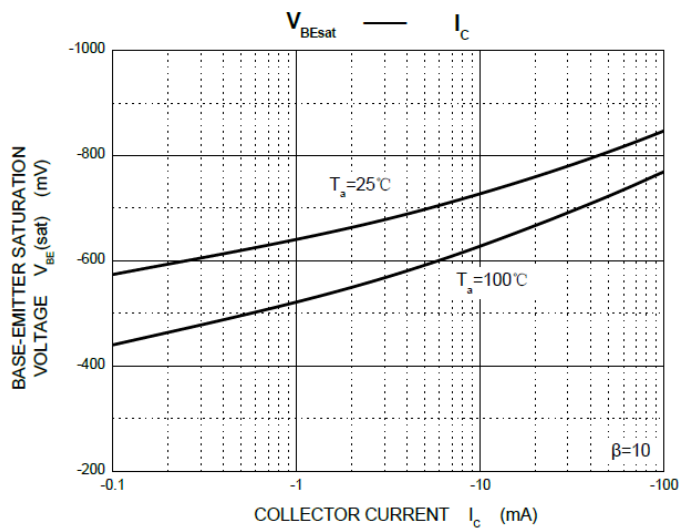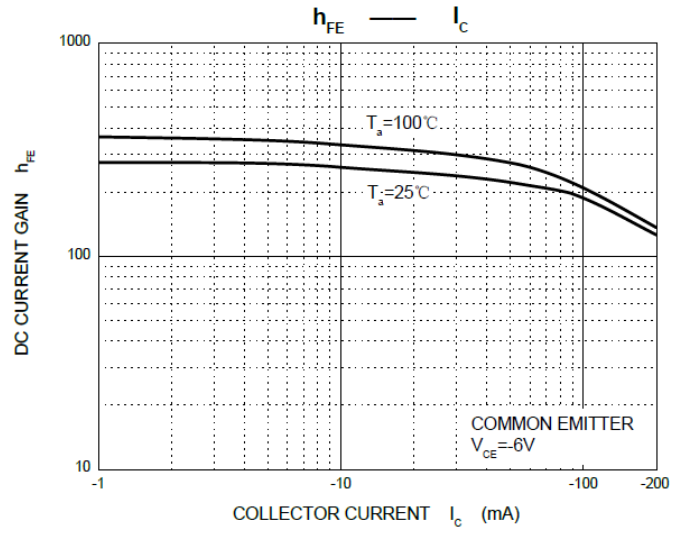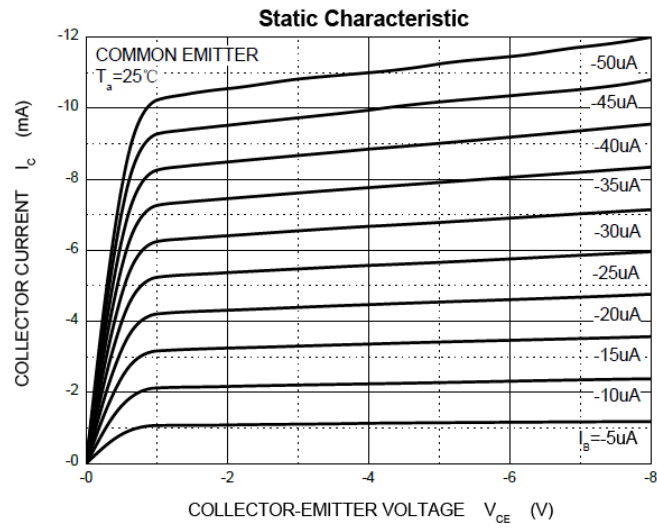

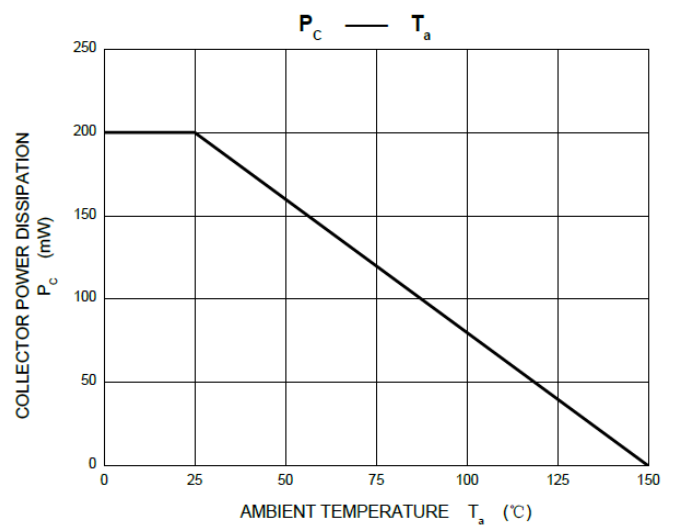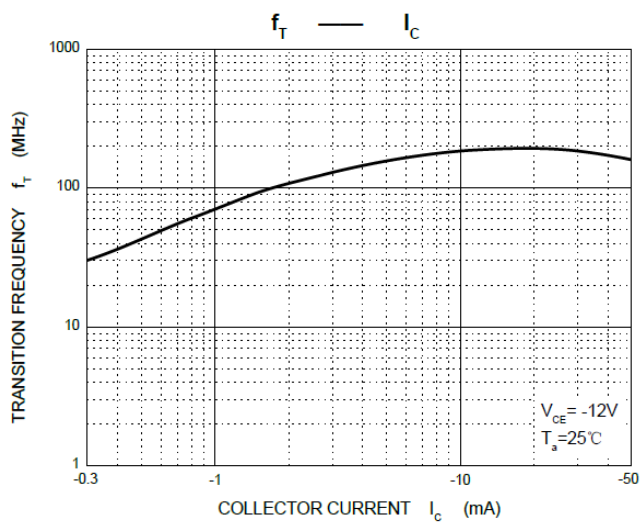


Outline Dimensions

SOT-23

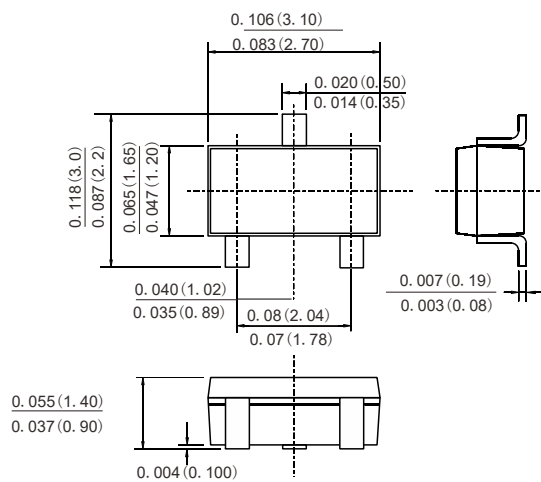

Dimensions in inches and (millimeters)

Suggested pad layout



Friendship Reminder

■ JiNan JingHeng(hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.

■ Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

■ JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.

■ JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

■ No license is granted by implication or otherwise under any intellectual property rights of JH.

■ JH is products are not authorized for use as critical components in life support devices or systems without express written approval of JH.