


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2015/863/EU



TO-252
(DPAK)

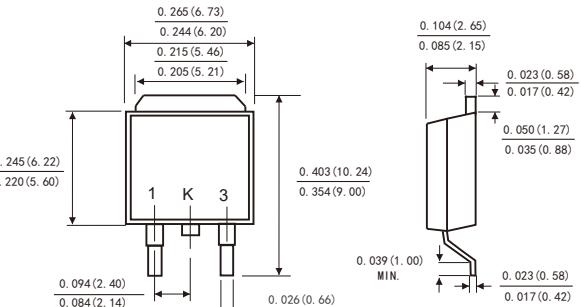

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: JEDEC TO-252 molded plastic body
- Terminals: Solderable per MIL-STD-202,method 208
- Polarity: As marked
- Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

Parameters	Symbols	SR 1020M2	SR 1030M2	SR 1040M2	SR 1060M2	SR 10100M2	SR 10150M2	SR 10200M2	Units
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	45	60	100	150	200	Volts
Maximum RMS voltage	V _{RMS}	14	21	32	42	70	105	140	Volts
Maximum DC blocking voltage	V _{DC}	20	30	45	60	100	150	200	Volts
Maximum average forward rectified current (see Fig.1)	I _(AV)					10.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}					150.0			Amps
Maximum instantaneous forward voltage at 10.0 A(Note 1)	V _F		0.60		0.75	0.85	0.90	0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1) T _A =25°C T _A =100°C T _A =125°C	I _R		100		30				µA
			5		—				mA
			—		3				
Typical thermal resistance (Note 2)	R _{θJC}			2.5					°C/W
Operating junction temperature range	T _J			-55 to+150					°C
Storage temperature range	T _{STG}			-55 to+150					°C

Notes: 1.Pulse test: 300 µ s pulse width,1% duty cycle

2.Thermal resistance from junction to case

RATINGS AND CHARACTERISTIC CURVES SR1020M2 THRU SR10200M2

FIG.1-FORWARD CURRENT DERATING CURVE

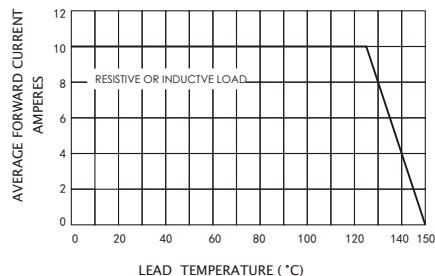


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

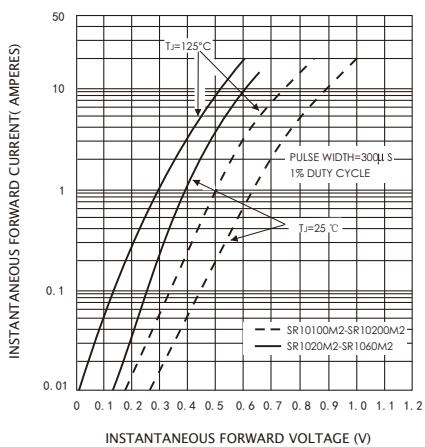


FIG.5-TYPICAL JUNCTION CAPACITANCE

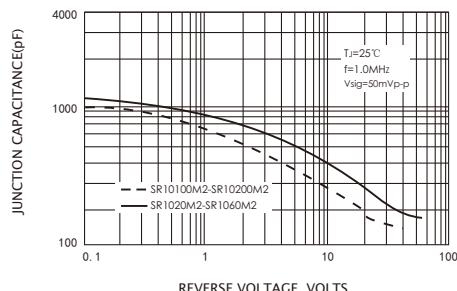


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

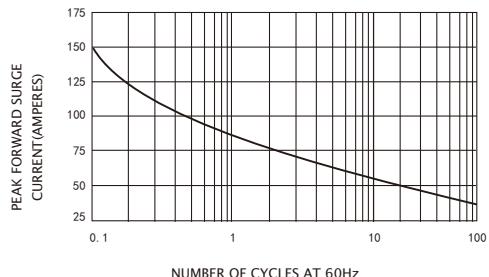


FIG.4-TYPICAL REVERSE CHARACTERISTICS

