

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2015/863/EU



Mechanical Data

- Case: JEDEC SMC(DO-214AB) molded plastic body
- Terminals: solder plated ,solderable per MIL-STD-750,method 2026
- Polarity: color band denotes cathode end
- Weight: 0.007ounce,0.21 gram

SMC(DO-214AB)



Typical Applications

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

Marking:

JF:Logo
xxxx:Date code
SS84LC:Type

Maximum Ratings

(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	40	V
Maximum average forward rectified current	$I_{F(AV)}$	8.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I_{FSM}	200	A
Operating junction temperature range	T_J	-55 to +150	°C
Storage temperature range	T_{stg}	-55 to +150	°C

RATINGS AND CHARACTERISTICS OF SS84LC

Electrical Characteristcs (T_a=25°C Unless Otherwise Noted)

Parameter	Test Conditions		Symbol	Typ	Max.	Unit
Instantaneous forward voltage	T _A =25 °C	I _F =2.0A	V _F ¹⁾	0.33	-	V
		I _F =5.0A		0.37	-	
		I _F =8.0A		0.41	0.45	
	T _A =125 °C	I _F =2.0A		0.25	-	
		I _F =5.0A		0.31	-	
		I _F =8.0A		0.37	-	
Reverse current	V _R =40V	T _A =25 °C	I _R ²⁾	50	100	μA
		T _A =100 °C		-	10	mA
		T _A =125 °C		-	40	
Typical junction capacitance	4V,1MHz		C _J	490		pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Pulse test: pulse width ≤40ms

Thermal Characteristics

Parameter	Symbol	SMC	Unit
Typical thermal resistance ³⁾	R _{θJA}	55.0	°C/W
	R _{θJL}	17.0	

3.P.C.B. mounted with 0.55" x 0.55" (14.0 mm x 14.0 mm) copper pad areas

Availabale Pack Information

Product code	Pack	Reel Size (mm)	Quantity (pcs/reel)	Box Size L×W×H (mm)	Quantity (reel/box)	Carton Size L×W×H (mm)	Quantity (box/carton)	Quantity (carton)
SS84LC-SMC	T/R	Φ330	3000	338×338×39	2	370×370×360	8	48

RATINGS AND CHARACTERISTICS OF SS84LC

Fig.1-Forward Current Derating Curve

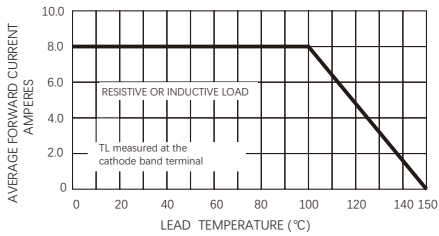


Fig.2-Maximum Non-repetitive Peak Forward Surge Current

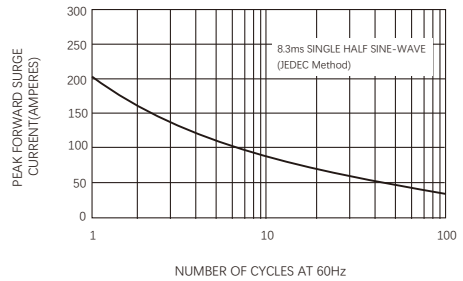


Fig.3-Typical Instantaneous Forward Characteristics

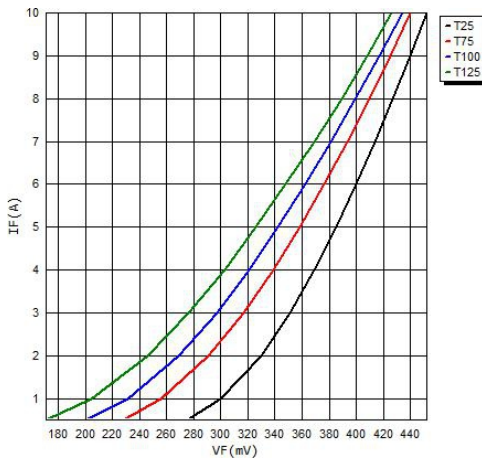


Fig.4-Typical Reverse Characteristics



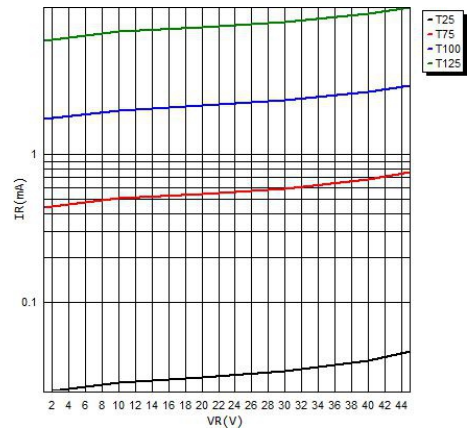



Fig.5-Typical Junction Capacitance

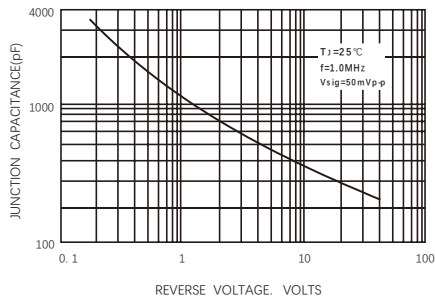

SMC(DO-214AB)

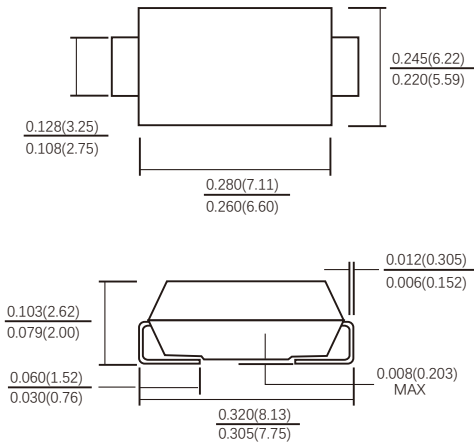

Suggested PAD Layout



Dimensions in inches and (millimeters)

Friendship Reminder

- JiNan JingHeng(hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.
- JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of JH.
- JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.