

FEATURES

- RDS(ON)<140mΩ@VGS=-2.5V
- RDS(ON)<110mΩ@VGS=-4.5V
- TrenchFET Power MOSFET





Product Summary			
V _{DS}	R _{DS(on)} (mΩ) Typ	I _D (A)	Q _g (Typ)
-20V	89 @ -2.5V	-2	3.3nc
	64 @ -4.5V	-3	

MECHANICAL DATA

- Case:SOT-23(TO-236)
- Terminals:Plated solderable per MIL-STD-750,method 2026
- Mounting Position: Any

SOT-23



P-channel MOSFET

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

Parameters	Symbol	Value	Unit
Drain-Source voltage	V _{DS}	-20	V
Gate-Source Voltage	V _{GS}	±12	V
Continuous Drain Current (T _J = 150°C)	I _D	-2.3	A
Maximum Power Dissipation @T _A =25°C	P _o	1	W
Junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150	°C

Thermal Resistance Ratings

Parameters	Symbol	Typ	Max	Unit
Junction to Ambient, Steady State ²⁾	R _{θJA}	-	104	°C/W


2. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch.

Electrical Characteristics (T_J=25°C unless otherwise noted)

Parameters	Symbol	Conditions	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D =-250μA	-20	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V, T _C =25°C	-	-	-1	μA
Gate-Source Leakage Current	I _{GSS}	V _{GS} =±12V, V _{DS} =0V	-	-	±100	nA
Gate-Source Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D =-250μA	-0.4	-0.7	-1	V
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} = -4.5V, I _D =-3A	-	64	110	mΩ
		V _{GS} = -2.5V, I _D =-2A	-	89	140	
Dynamic						
Input Capacitance	C _{iss}	V _{DS} =-10V, V _{GS} =0V, f=1MHz	-	405	-	pF
Output Capacitance	C _{oss}		-	75	-	
Reverse Transfer Capacitance	C _{rss}		-	55	-	
Total Gate Charge	Q _g	V _{DS} =-10V, V _{GS} =-2.5V, I _D =-3A	-	3.3	12	nC
Gate-Source Charge	Q _{gs}		-	0.7	-	
Gate-Drain Charge	Q _{gd}		-	1.3	-	
Turn-on Delay Time	t _{D(on)}	V _{GS} =-4.5V, V _{DD} =-10V, I _D =-1A, R _{GEN} =10Ω	-	11	-	ns
Turn-On Rise Time	t _r		-	35	-	
Turn-off Delay Time	t _{D(off)}		-	30	-	
Turn-Off Fall Time	t _f		-	10	-	
Drain-Source Body Diode Characteristics						
Maximum Body-Diode Continuous Current	I _S		-	-	-1.3	A
Diode Forward Voltage	V _{SD}	I _S =-1.3A, V _{GS} =0V	-	-	-1.2	V


PACKAGE OUTLINE DIMENSIONS

SOT-23

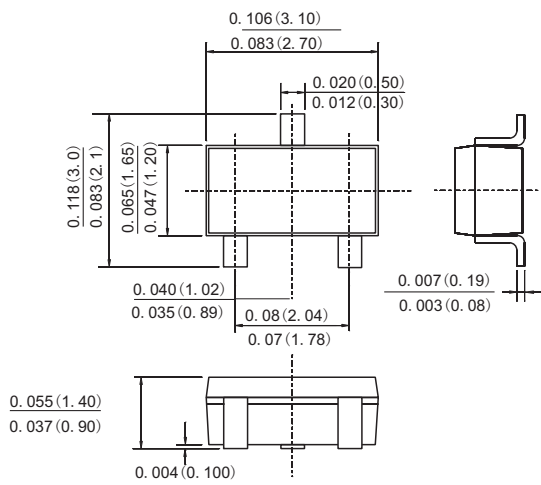

Dimensions in inches and (millimeters)

Suggested Pad Layout



Dimensions in millimeters

Friendship Reminder

■ JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.

■ Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

■ JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.

■ JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

■ No license is granted by implication or otherwise under any intellectual property rights of JH.

■ JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.