

### General Description

This series of power MOSFET use N channel Multi-EPI Super-Junction technology and design to provide better characteristics, such as fast switching time, low Ciss and Crss, low on resistance and excellent avalanche characteristics, making it especially suitable for applications which require superior power density and outstanding efficiency.

### Features

- Low on-resistance
- Ultra low gate charge and input capacitance
- 100% avalanche tested
- Rohs compliant

### Mechanical Data

- Case: TO-220, ITO-220, TO-263, TO-247, TO-3P, TO-263-7L Package


### Application

- Switching applications

### Ordering Information

Part No.	Package Type	Package	Quality(box)
SJ45N65R	TO-220	Tube	1000
SJ45N65FR	ITO-220	Tube	1000
SJ45N65DR	TO-263	Tape & Reel	800
SJ45N65PR	TO-247	Tube	360
SJ45N65KR	TO-3P	Tube	360
SJ45N65D7R	TO-263-7	Tape & Reel	800

Product Summary			
V <sub>DS</sub>	R <sub>DS(on)</sub> (mΩ)Typ	I <sub>D</sub> (A)	Q <sub>g</sub> (Typ)
650V	75 @ 10V, 23A	45	190nc

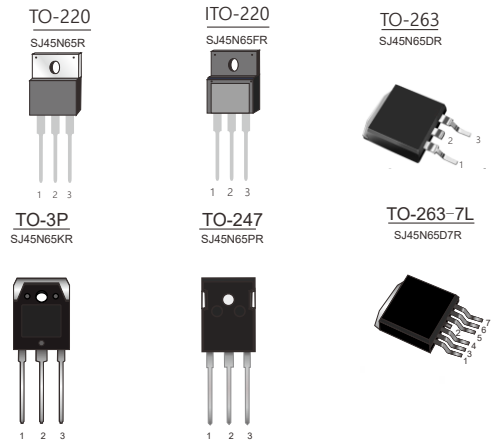

### Block Diagram

Pin Definition:  
 1. Gate  
 2. Drain  
 3/4/5/6/7. Source

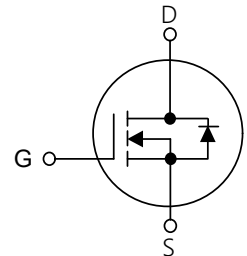


Table1 Absolute Maximum Ratings (T<sub>c</sub>=25°C, unless otherwise specified)

Parameters	Symbol	SJ45N65R		SJ45N65FR	Unit
		SJ45N65DR	SJ45N65PR		
Drain-Source Voltage	V <sub>DS</sub>	650			V
Gate-Source Voltage	V <sub>GS</sub>	±30			V
Contionous Drain Current	I <sub>D</sub>	T <sub>C</sub> =25°C	45	16	A
		T <sub>C</sub> =100°C	24	10	
Pulsed Drain Current (Note 1)	I <sub>DM</sub>	130			A
Single Pulse Avalanche Energy(Note 2)	E <sub>AS</sub>	1050			mJ
Avalanche Current(Note 1)	I <sub>AR</sub>	9.5			A
Repetitive Avalanche Energy(Note 1)	E <sub>AR</sub>	1.6			mJ
Reverse Diode Recovery dv/dt(Note 3)	dv/dt	15			V/ns
Drain Source Voltage Slope (V <sub>DS</sub> =480V)	dv/dt	50			V/ns
Power Dissipation T <sub>C</sub> =25°C	P <sub>D</sub>	391		50	W
Operating Junction and Storage Temperature	T <sub>J</sub> /T <sub>STG</sub>	-55 ~ +150			°C

**Table 2. Thermal Characteristics**

Parameters	Symbol	SJ45N65R		Unit
		SJ45N65DR SJ45N65PR	SJ45N65FR	
Thermal resistance Junction to Ambient	$R_{\theta JA}$	62		$^{\circ}\text{C}/\text{W}$
Thermal resistance Junction to Case	$R_{\theta JC}$	0.32		$^{\circ}\text{C}/\text{W}$

**Table 3. Electrical Characteristics** ( $T_J=25^{\circ}\text{C}$ , unless otherwise specified)

Parameters	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=250\mu\text{A}$	650			V
Drain-Source Leakage Current	$I_{DSS}$	$V_{DS}=650V, V_{GS}=0V$			1	$\mu\text{A}$
Gate-Source Leakage Current	Forward	$I_{GSS}$			100	nA
	Reverse				-100	nA
<b>On Characteristics(Note 4)</b>						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	2.5		4.5	V
Static Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=23A$		75	85	m $\Omega$
<b>Dynamic Characteristics(Note 5)</b>						
Input Capacitance	$C_{ISS}$	$V_{DS}=25V, V_{GS}=0V, f=1\text{MHz}$		2800		pF
Output Capacitance	$C_{OSS}$			138		pF
Reverse Transfer Capacitance	$C_{RSS}$			5		pF
<b>Switching Characteristics (Note 5)</b>						
Turn-On Delay Time	$t_{d(on)}$	$V_{DD}=480V, I_D=23A,$ $V_{GS}=10V, R_G=20\Omega$		19		ns
Turn-On Rise Time	$t_r$			10		ns
Turn-Off Delay Time	$t_{d(off)}$			87		ns
Turn-Off Fall Time	$t_f$			5		ns
Total Gate Charge	$Q_G$	$V_{DS}=480V, I_D=23A,$ $V_{GS}=10V$		190		nC
Gate-Source Charge	$Q_{GS}$			30		nC
Gate-Drain Charge	$Q_{GD}$			95		nC
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
Drain-Source Diode Forward Voltage	$V_{SD}$	$V_{GS}=0V, I_S=23A$		0.9	1.5	V
Maximum Continuous Drain-Source Diode Forward Current(Note 4)	$I_S$				45	A
Reverse Recovery Time	$t_{rr}$	$V_{GS}=0V, I_S=23A$		180		ns
Reverse Recovery Charge	$Q_{RR}$	$dI/dt=100A/\mu\text{s}$ (Note 4)		17		$\mu\text{C}$

- Notes: 1 Repetitive Rating:Pulse width limited by maximum junction temperature  
 2 Pulse width  $t_p$  limited by  $T_{j,max}$   
 3  $V_{DD} \leq BV_{DSS}$ , starting  $T_J=25^{\circ}\text{C}$   
 4 Pulse Test: Pulse width  $\leq 300\mu\text{s}$ , Duty cycle  $\leq 2\%$   
 5 Guaranteed by design, not subject to production

Typical Characteristics Diagrams

Figure 1. Output Characteristics

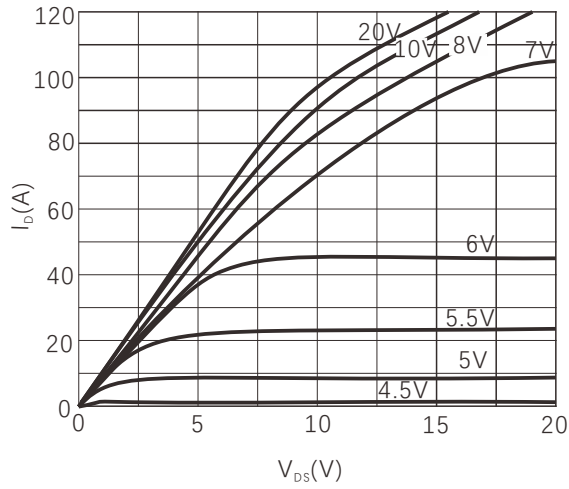


Figure 2. Transfer Characteristics

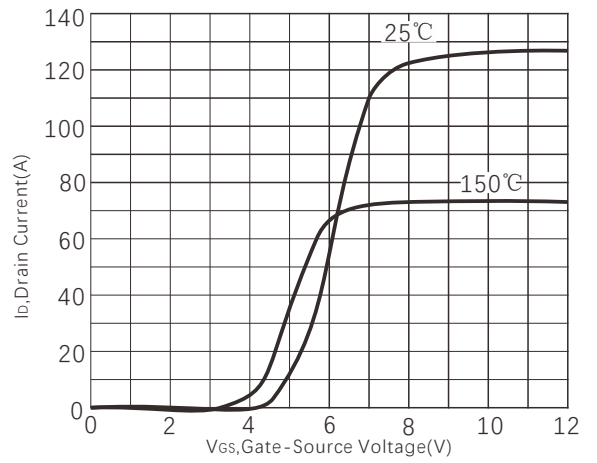


Figure 3. On-Resistance vs. Drain Current

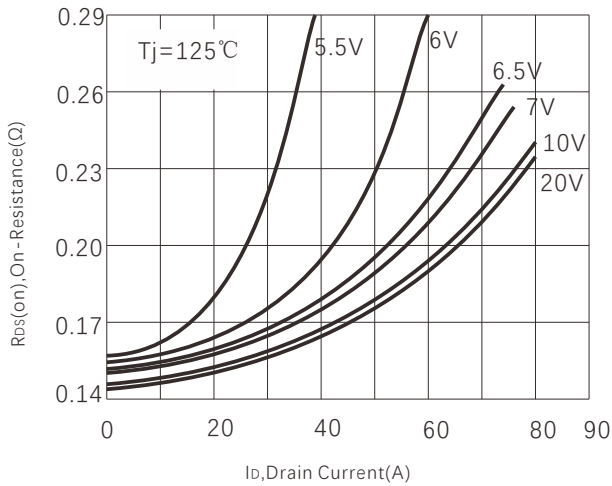


Figure 4. Capacitance

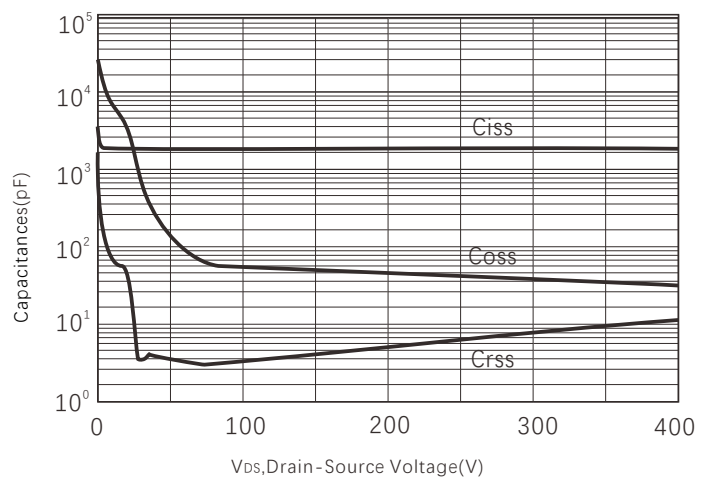


Figure 5. Gate charge

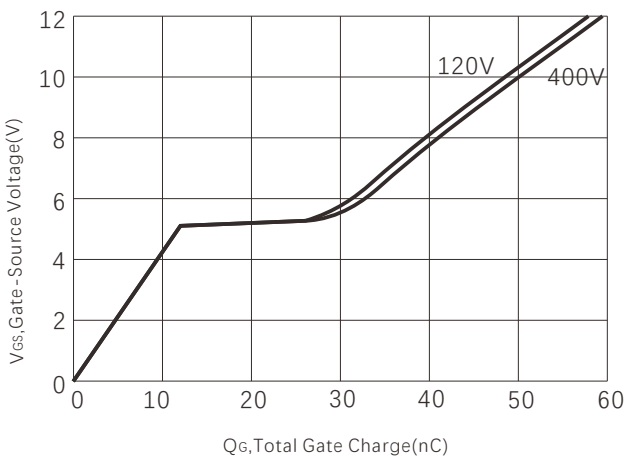


Figure 6. Source-Drain Diode Forward Voltage

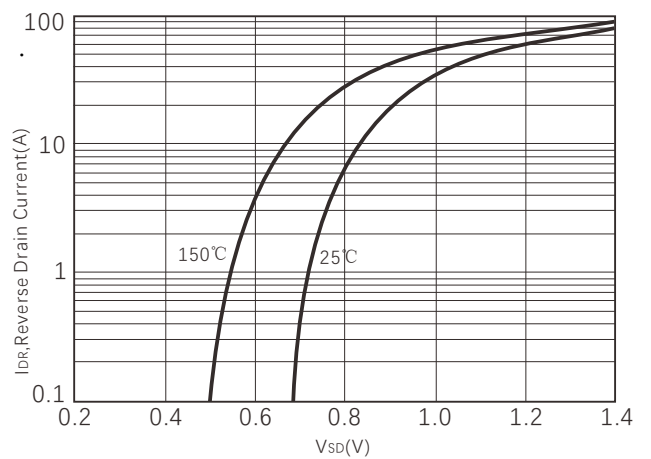


Figure 7. Normalized  $R_{DS(ON)}$  vs Junction Temperature

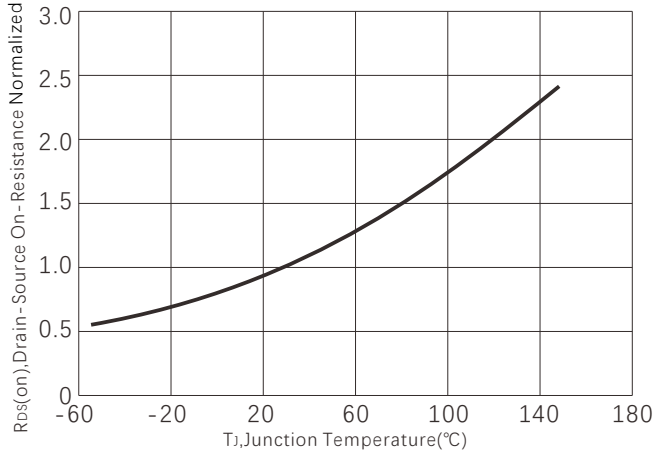


Figure 8.  $BV_{DSS}$  vs Junction Temperature

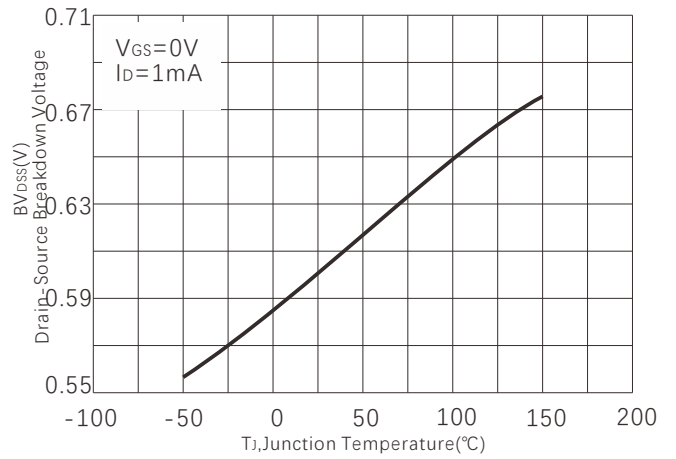


Figure 9. Safe operating area

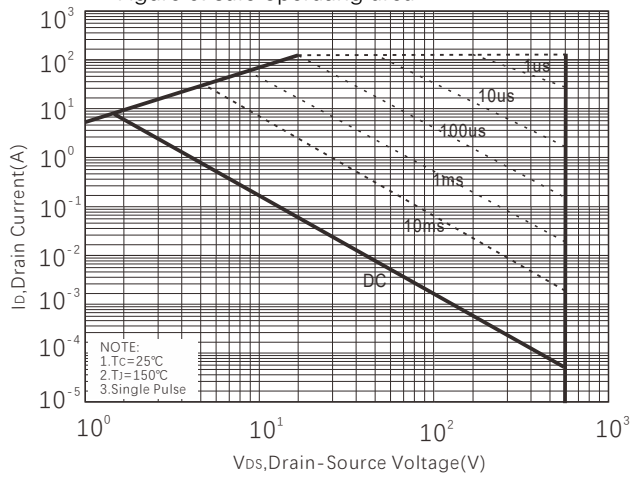


Figure 10. Power dissipation



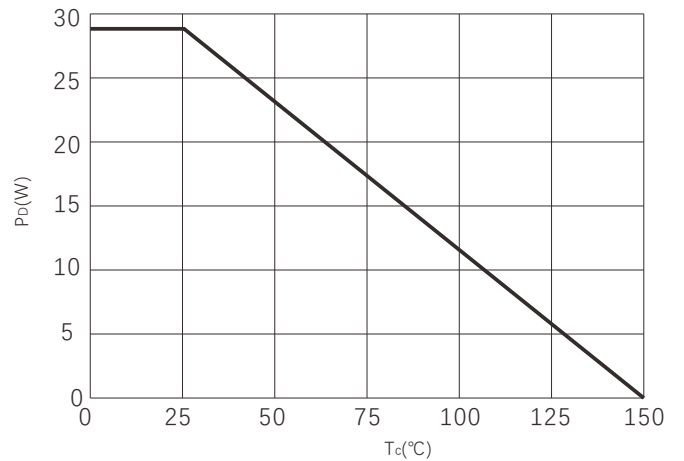


Figure 11. Maximum Transient Thermal Impedance




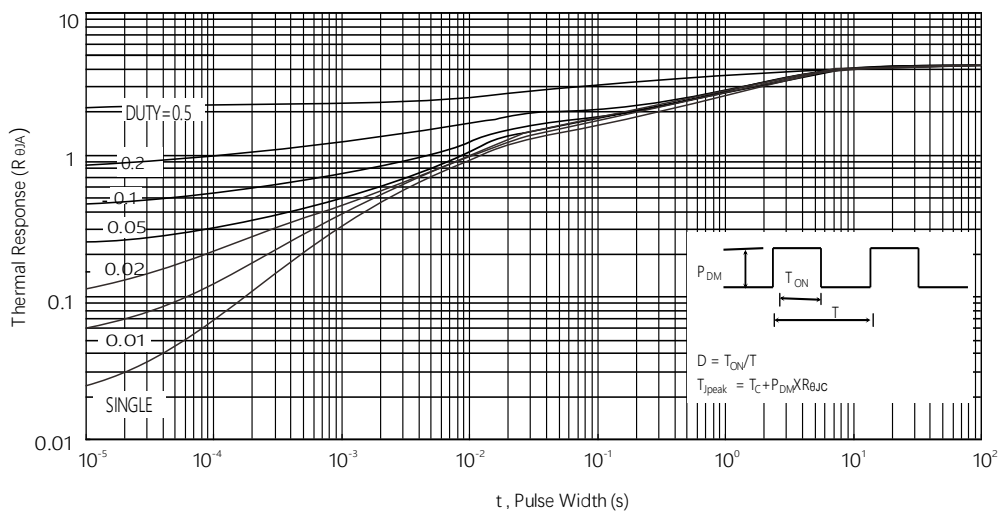


Typical Test Circuit

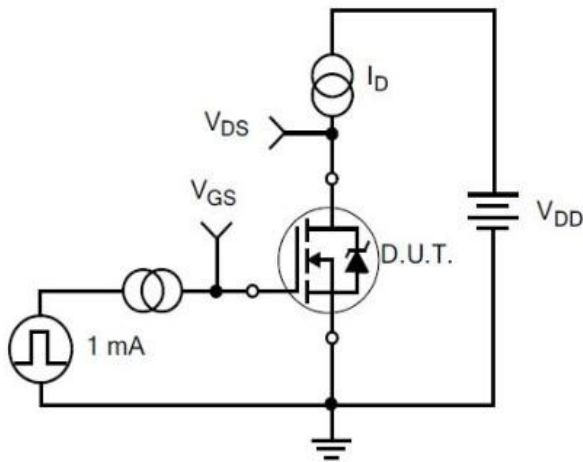


1) Gate Charge Test Circuit

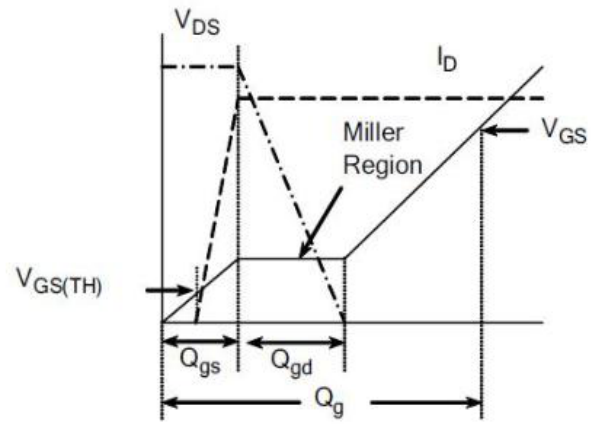

2) Gate Charge Waveform

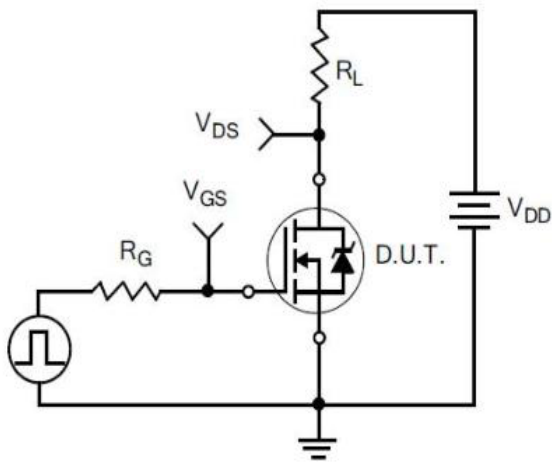


3) Resistive Switching Test Circuit

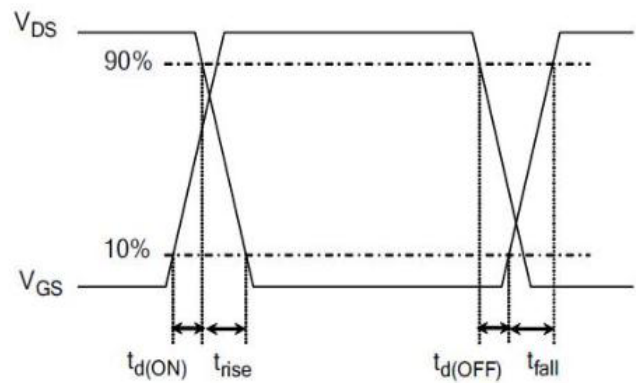


4) Resistive Switching Waveforms


Typical Test Circuit

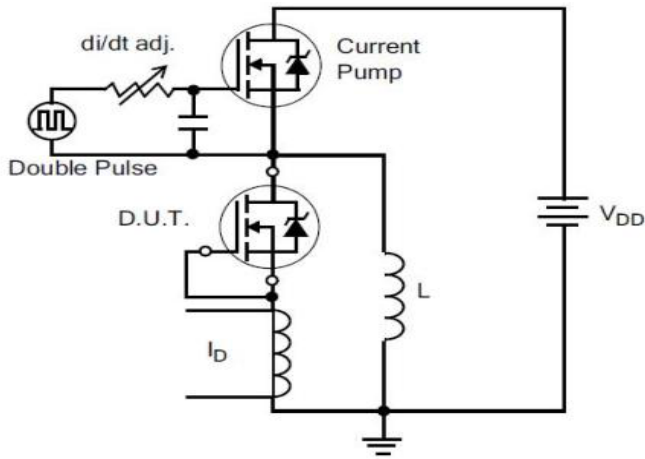


5) Diode Reverse Recovery Test Circuit

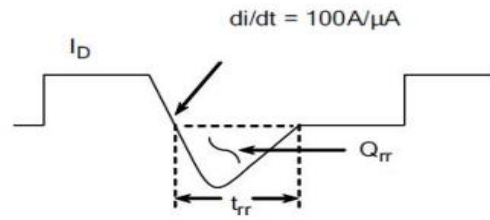

6) Diode Reverse Recovery Waveform

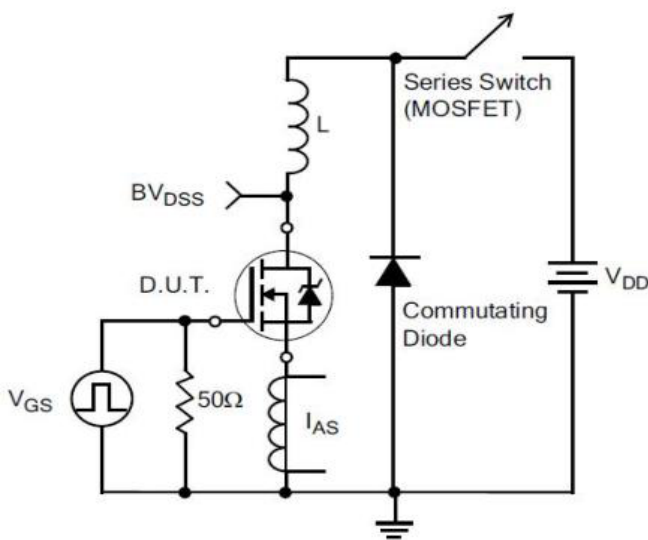


7) . Unclamped Inductive Switching Test Circuit

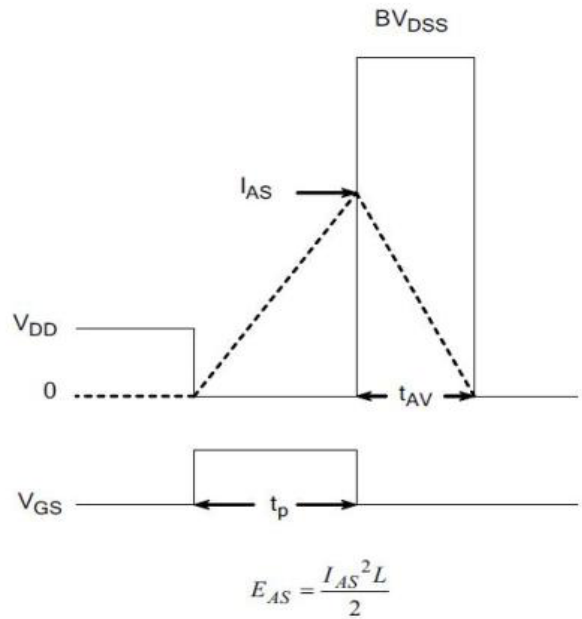


8) Unclamped Inductive Switching Waveforms

Product Names Rules

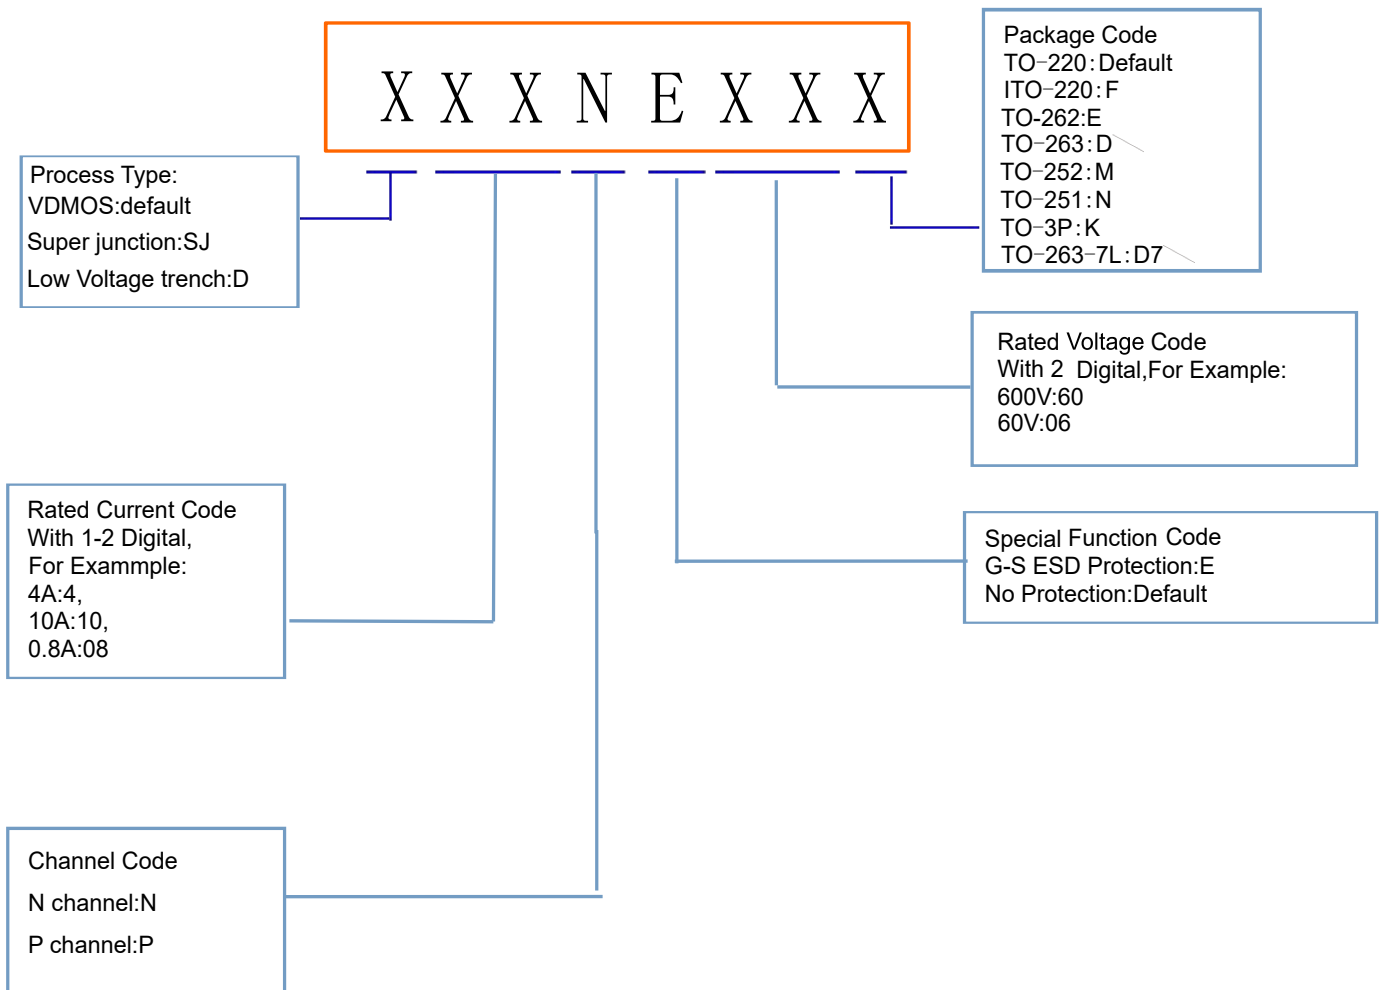


Dimensions

TO-220 PACKAGE OUTLINE DIMENSIONS

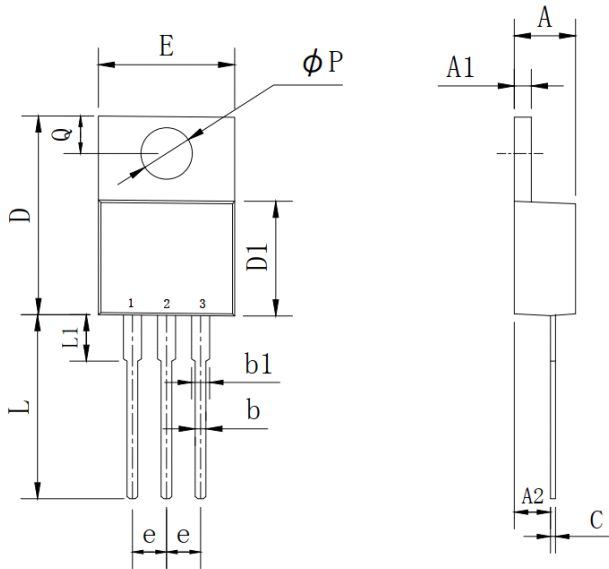

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	4.25	4.87	0.167	0.192
A1	1.07	1.47	0.042	0.058
A2	2.03	2.92	0.080	0.115
b	0.51	1.11	0.020	0.044
b1	0.97	1.6	0.038	0.063
C	0.3	0.7	0.012	0.028
D	14.6	15.9	0.575	0.626
D1	8.04	9.3	0.317	0.366
E	9.57	10.57	0.377	0.416
e	2.34	2.74	0.092	0.108
L	12.58	14.3	0.495	0.563
L1	2.8	4.2	0.110	0.165
P	3.4	4.14	0.134	0.163
Q	2.45	3	0.096	0.118


ITO-220 PACKAGE OUTLINE DIMENSIONS

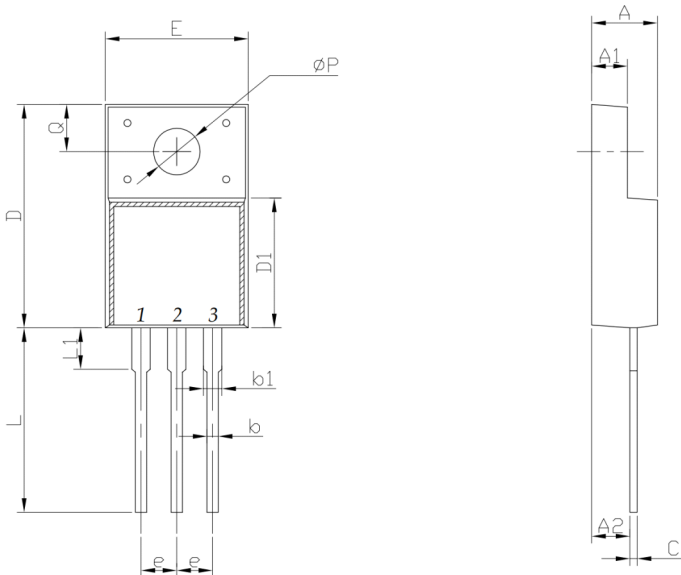

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	4.24	4.9	0.167	0.193
A1	2.3	2.92	0.091	0.115
A2	2.61	2.81	0.103	0.111
b	0.3	1	0.012	0.039
b1	0.9	1.55	0.035	0.061
C	0.3	0.7	0.012	0.028
D	14.5	16.36	0.571	0.644
D1	8.8	9.41	0.346	0.370
E	9.5	10.5	0.374	0.413
e	2.3	2.75	0.091	0.108
L	12.6	14	0.496	0.551
L1	2.45	4.3	0.096	0.169
P	2.9	3.8	0.114	0.150
Q	2.5	3.55	0.098	0.140


Dimensions

TO-263 PACKAGE OUTLINE DIMENSIONS

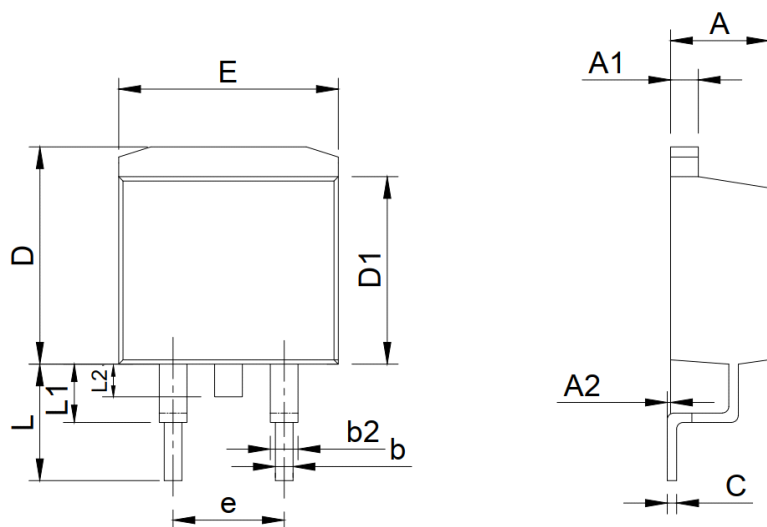

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	4.25	4.87	0.167	0.192
A1	1.07	1.47	0.042	0.058
A2	0	0.25	0.000	0.010
b	0.61	1.01	0.024	0.040
b1	1.2	1.34	0.047	0.053
C	0.3	0.6	0.012	0.024
D	9.48	10.84	0.373	0.427
D1	8.49	9.3	0.334	0.366
E	9.7	10.31	0.382	0.406
e	4.88	5.28	0.192	0.208
L	4.46	5.85	0.176	0.230
L1	1.33	2.33	0.052	0.092
L2	0	2.2	0.000	0.087


TO-263-7L PACKAGE OUTLINE DIMENSIONS

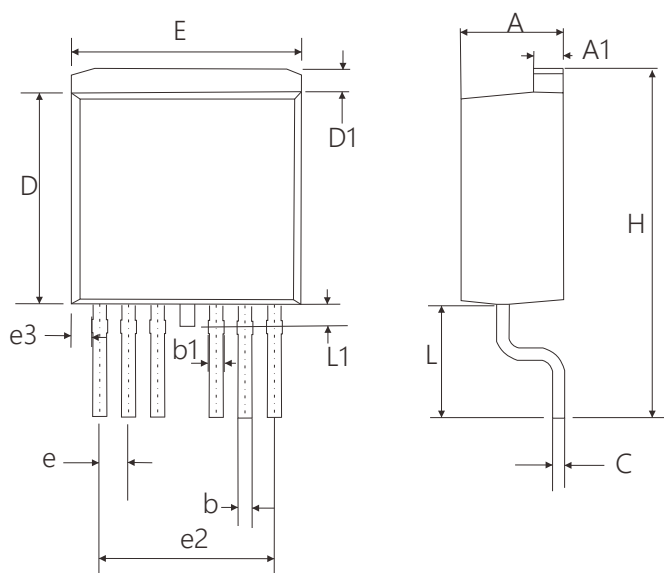

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	4.25	4.75	0.167	0.187
A1	1.2	1.4	0.047	0.055
b	0.5	0.7	0.020	0.028
b1	0.5	0.9	0.020	0.035
C	0.4	0.6	0.016	0.024
D	9.05	9.45	0.356	0.372
D1	0.7	1.3	0.028	0.051
E	9.8	10.2	0.386	0.402
e	1.07	1.47	0.042	0.058
e2	7.32	7.92	0.288	0.312
e3	0.64	1.04	0.025	0.041
H	14.65	15.65	0.577	0.616
L	4.47	5.47	0.176	0.215
L1	0.90	1.50	0.035	0.059


Dimensions

TO-3P PACKAGE OUTLINE DIMENSIONS

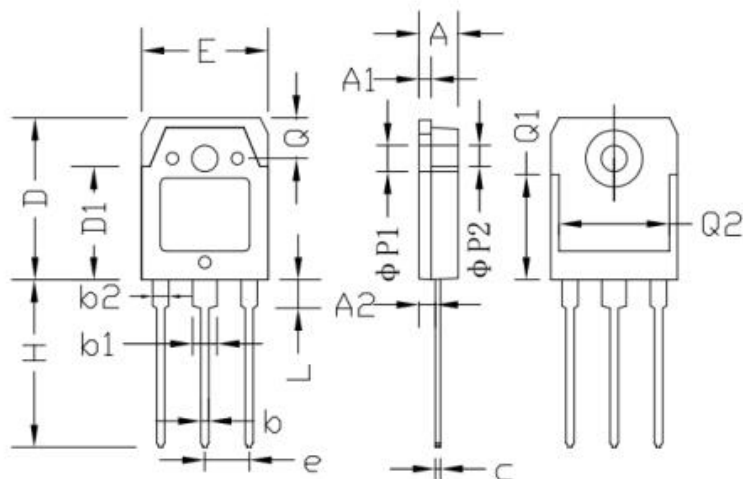

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	min.	max.	min.	max.
A	4.60	5.00	0.181	0.197
A1	1.45	1.65	0.057	0.065
A2	2.20	2.60	0.087	0.102
b	0.80	1.20	0.032	0.047
b1	2.80	3.20	0.110	0.126
b2	1.80	2.20	0.071	0.087
C	0.55	0.75	0.022	0.030
D	19.20	19.70	0.756	0.776
D1	13.10	14.70	0.516	0.578
E	15.40	15.80	0.607	0.623
e	5.45 TYP		0.215 TYP	
H	19.80	20.20	0.780	0.826
L	3.30	3.70	0.130	0.146
ΦP1	3.20 TYP		0.126 TYP	
ΦP2	3.50 TYP		0.138 TYP	
Q	5.00 TYP		0.197 TYP	
Q1	12.40 TYP		0.488 TYP	
Q2	12.6	-	0.496	-

TO-247 PACKAGE OUTLINE DIMENSIONS

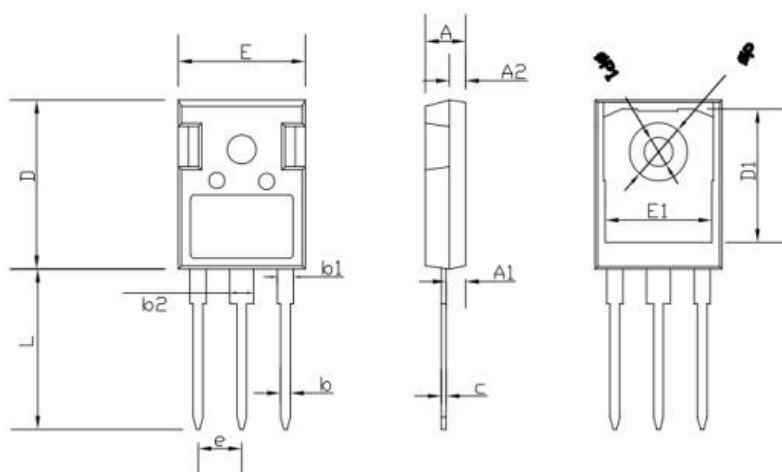

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	min.	max.	min.	max.
A	4.90	5.10	0.193	0.201
A1	2.31	2.51	0.091	0.099
A2	1.90	2.10	0.075	0.083
b	1.16	1.26	0.046	0.050
b1	1.96	2.06	0.0772	0.0812
b2	2.96	3.06	0.117	0.121
c	0.59	0.66	0.0232	0.0260
D	20.90	21.10	0.8235	0.8313
D1	16.25	16.85	0.6403	0.6639
E	15.70	15.90	0.6186	0.6265
E1	13.10	13.50	0.5161	0.5319
e	5.44		0.2143	
L	19.80	20.10	0.7801	0.7919
ΦP	3.50	3.70	0.1379	0.1458
ΦP1	0	7.30	0	0.2876

## Friendship Reminder

■ JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.

济南晶恒（以下简称 JH）保留未经通知，变更本文件和与本文件相关的产品及规格的权利。

■ Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

使用方应在使用、采购本产品之前获取并确认产品信息和规格书的最新版本。

■ JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.

JH 对其产品用于某特定用途的适用性，既不做任何保证、说明或担保，也不承担任何应用协助或使用方设计的法定责任。

■ JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

JH 不保证或承担任何责任，其产品被采购使用于任何非预期或授权的应用，

■ No license is granted by implication or otherwise under any intellectual property rights of JH.

此规格书属于 JH 的知识产权,没有经过我司授权不得抄袭。

■ JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.

没有 JH 的书面授权，JH 的产品不能在生命支撑设备或系统里作为关键零件使用。