



# D018N03 Series

## 320A 30V N-Channel Enhancement Mode Power MOSFET

### General Description

These N-channel enhancement mode power mosfets used advanced trench technology design, provided excellent Rdson and low gate charge. Which accords with the RoHS standard.

### Features

- Fast switching
- Low reverse transfer capacitances
- Low gate charge and Low on-resistance
- 100% avalanche tested

### Mechanical Data

- Case:TO-220,ITO-220,TO-263,TO-263-7L, TO-262,TO-251, TO-252 Package

Product Summary			
V <sub>DS</sub>	R <sub>DSON</sub> (on) (mΩ) Typ	I <sub>D</sub> (A)	Q <sub>G</sub> (Typ)
30V	1.5 @ 10V 160A	320	209nc

TO-220



ITO-220



TO-263



TO-262



TO-251



TO-252



TO-263-7L



### Application

- Power switching applications
- Inverter management system
- Electric tools


### Ordering Information

Part No.	Package Type	Package	Quality(box)
D018N03	TO-220	Tube	1000
D018N03F	ITO-220	Tube	1000
D018N03D	TO-263	Tape & Reel	800
D018N03E	TO-262	Tube	1000
D018N03N	TO-251	Tube	1000
D018N03M	TO-252	Tape & Reel	2500
D018N03D7	TO-263-7L	Tape & Reel	800

### Pin Definition:

1. Gate
2. Drain
- 3/4/5/6/7. Source

### Block Diagram

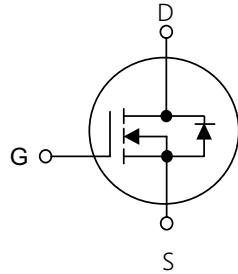Table1 Absolute Maximum Ratings (T<sub>c</sub>=25°C, unless otherwise specified)

Parameter	Symbol	D018N03/D018N03D/D018N03E D018N03M/D018N03N D018N03D7		D018N03F	Unit
Drain-Source Voltage	V <sub>DS</sub>	30			V
Gate-Source Voltage	V <sub>GS</sub>	±20			V
Continuous Drain Current T <sub>c</sub> =25°C	I <sub>D</sub>	320	320*		A
T <sub>c</sub> =100°C		226	226*		
Pulsed Drain Current (Note 1)	I <sub>DM</sub>	1280			A
Single Pulse Avalanche Energy(Note 2)	E <sub>AS</sub>	1600			mJ
Avalanche Current(Note 2)	I <sub>AR</sub>	80			A
Power Dissipation T <sub>c</sub> =25°C	P <sub>D</sub>	270	80		W
Operating Junction and Storage Temperature	T <sub>J</sub> /T <sub>STG</sub>	-55~+175			°C

\* limited by maximum junction temperature

**Table 2.Thermal Characteristics**

Parameter	Symbol	D018N03/D018N03D/ D018N03M/D018N03N D018N03E/D018N03D7	D018N03F	Unit
Thermal resistance Junction to Ambient	R <sub>θJA</sub>	75	75	°C/W
Thermal resistance Junction to Case	R <sub>θJC</sub>	0.55	1.88	°C/W

**Table 3. Electrical Characteristics (T<sub>c</sub>=25°C, unless otherwise specified)**

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	V <sub>DSS</sub>	V <sub>GS</sub> =0V,I <sub>D</sub> =250μA	30	-	-	V
Drain-Source Leakage Current	I <sub>DSS</sub>	V <sub>DS</sub> =30V,V <sub>GS</sub> =0V	-	-	1	μA
Gate- Source Leakage Current	Forward	V <sub>GS</sub> =20V,V <sub>DS</sub> =0V	-	-	100	nA
	Reverse	V <sub>GS</sub> =-20V,V <sub>DS</sub> =0V	-	-	-100	nA
<b>On Characteristics(Note 3)</b>						
Gate Threshold Voltage	V <sub>GS(TH)</sub>	V <sub>DS</sub> =V <sub>GS</sub> ,I <sub>D</sub> =250μA	1.0	1.5	2.0	V
Static Drain-Source On-State Resistance	R <sub>DSS(ON)</sub>	V <sub>GS</sub> =10V,I <sub>D</sub> =160A	-	1.5	1.8	mΩ
<b>Dynamic Characteristics(Note 4)</b>						
Input Capacitance	C <sub>ISS</sub>	V <sub>DS</sub> =15V,V <sub>GS</sub> =0V,f=1MHz	-	8573	-	pF
Output Capacitance	C <sub>OSS</sub>		-	1266	-	pF
Reverse Transfer Capacitance	C <sub>RSS</sub>		-	886	-	pF
<b>Switching Characteristics (Note 4)</b>						
Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> =15V,I <sub>D</sub> =160A V <sub>GS</sub> =4.5V,R <sub>GEN</sub> =2Ω,	-	32	-	ns
Turn-On Rise Time	t <sub>r</sub>		-	140	-	ns
Turn-Off Delay Time	t <sub>d(off)</sub>		-	111	-	ns
Turn-Off Fall Time	t <sub>f</sub>		-	156	-	ns
Total Gate Charge	Q <sub>G</sub>	V <sub>DD</sub> =50V,I <sub>D</sub> =160A, V <sub>GS</sub> =10V	-	209	-	nC
Gate-Source Charge	Q <sub>GS</sub>		-	31	-	nC
Gate-Drain Charge	Q <sub>GD</sub>		-	56.5	-	nC
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
Drain-Source Diode Forward Voltage	V <sub>SD</sub>	V <sub>GS</sub> =0V,I <sub>S</sub> =160A	-	-	1.3	V
Maximum Continuous Drain-Source Diode Forward Current	I <sub>S</sub>		-	-	320	A
Reverse Recovery Time	t <sub>rr</sub>	V <sub>GS</sub> =0V,I <sub>F</sub> =160A dI/dt=100A/μs(Note 1)	-	116	-	ns
Reverse Recovery Charge	Q <sub>RR</sub>		-	110	-	nC

Notes: 1 Repetitive Rating:Pulse width limited by maximum junction temperature

 2 L=0.5mH, I<sub>D</sub>=80A,V<sub>DD</sub>=24V,V<sub>GATE</sub>=30V,Starting T<sub>J</sub>=25°C

3 Pulse Test: Pulse width ≤300μs,Duty cycle≤2%

4 Guaranteed by design,not subject to production

## Typical Characteristics Diagrams

Figure 1. Output Characteristics

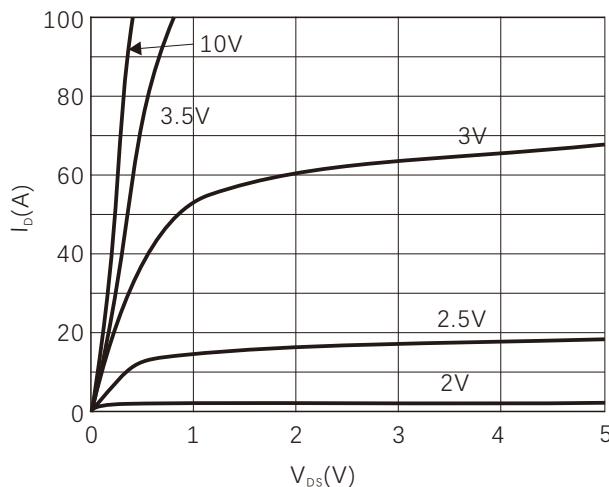


Figure 2. Transfer Characteristics

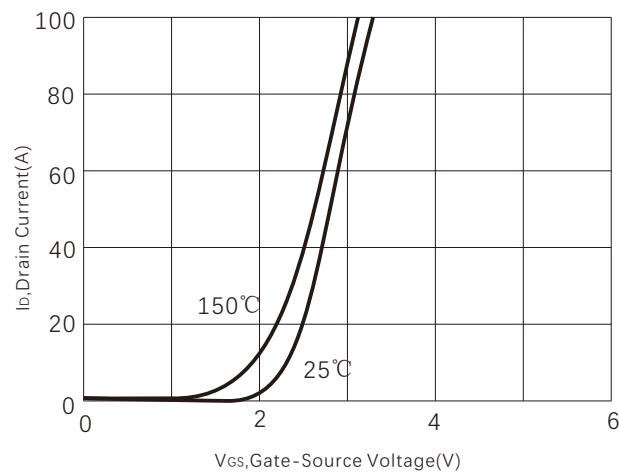


Figure 3. VTH vs Junction Temperature

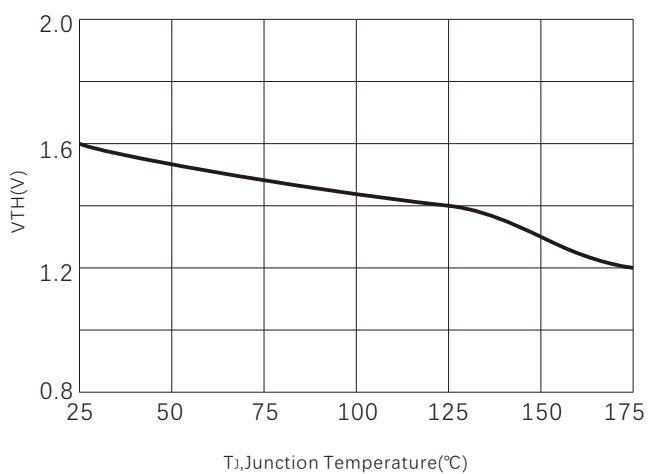


Figure 4. Capacitance

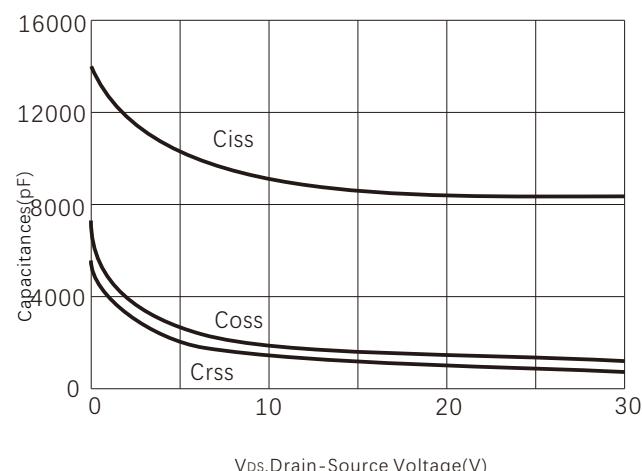


Figure 5. Gate charge

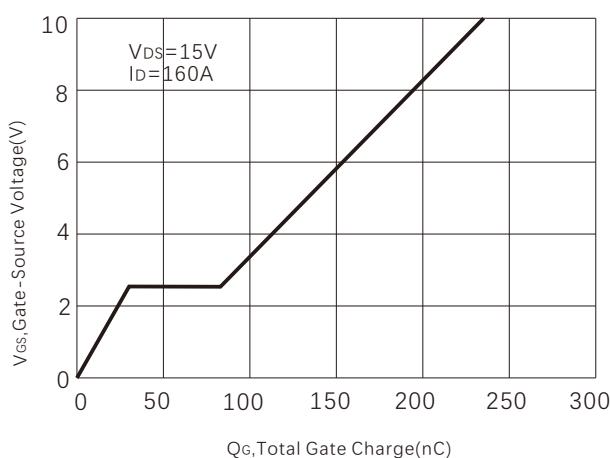


Figure 6. Drain Current

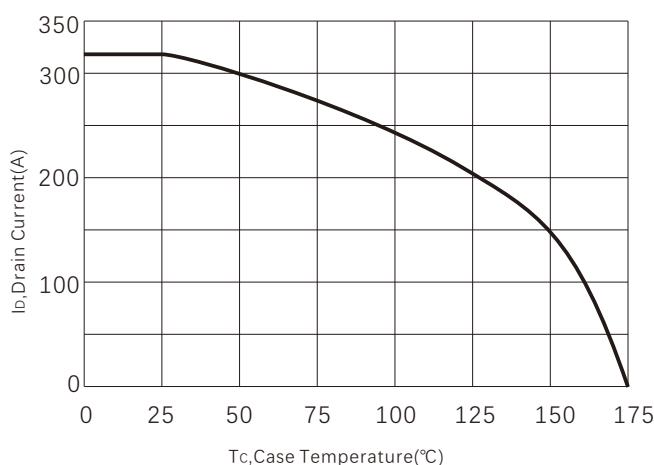


Figure 7.  $R_{DS(ON)}$  vs Junction Temperature

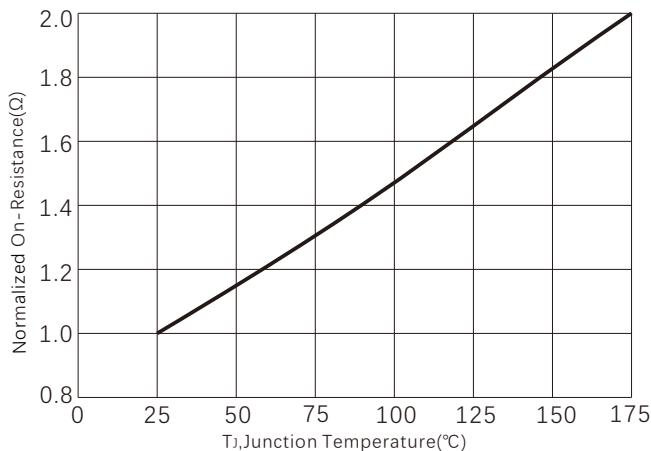


Figure 8. Power dissipation

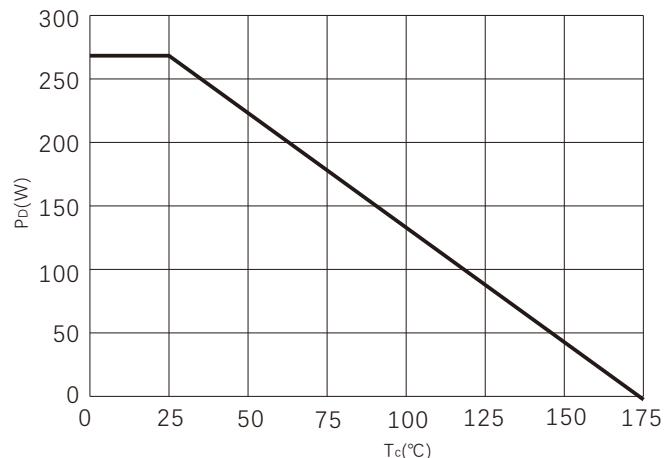


Figure 9. Safe operating area



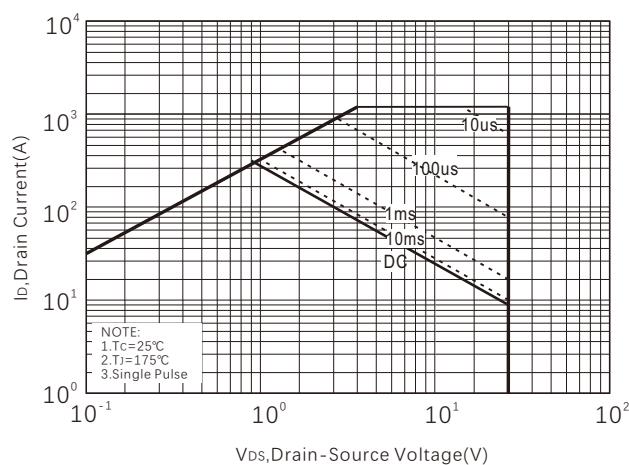



Figure 10. Normalized Maximum Transient Thermal Impedance

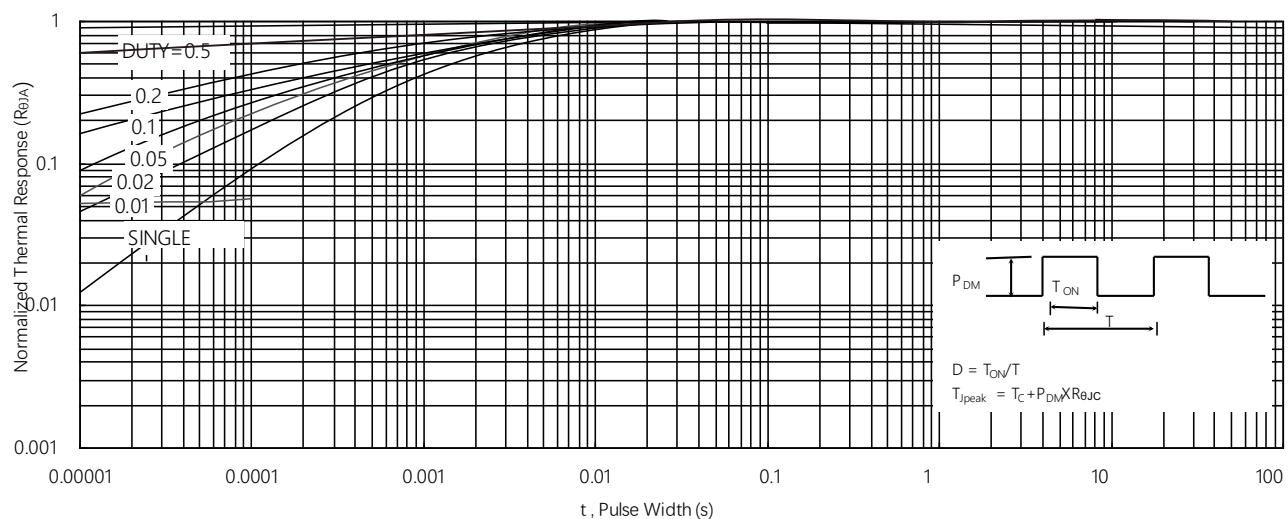


## Typical Test Circuit

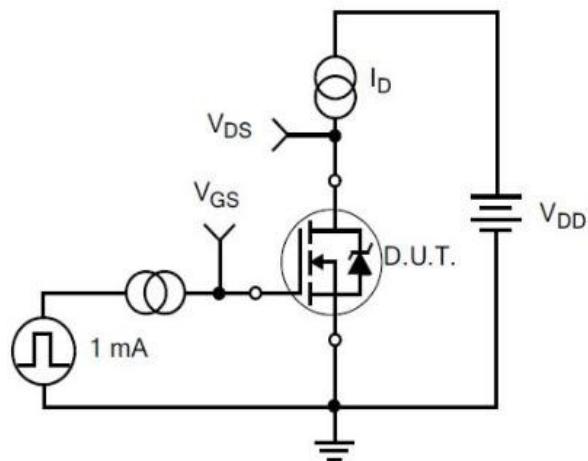


1) Gate Charge Test Circuit

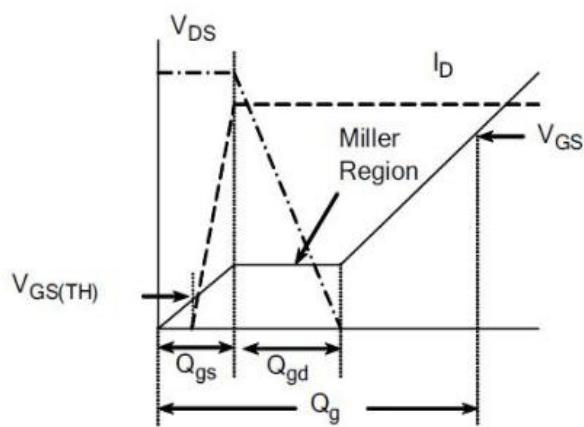


2) . Gate Charge Waveform

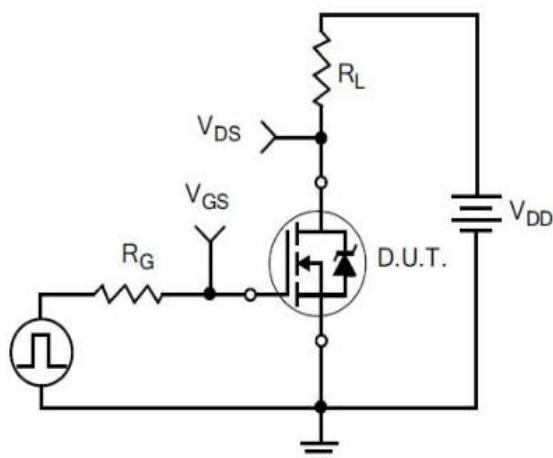


3) Resistive Switching Test Circuit

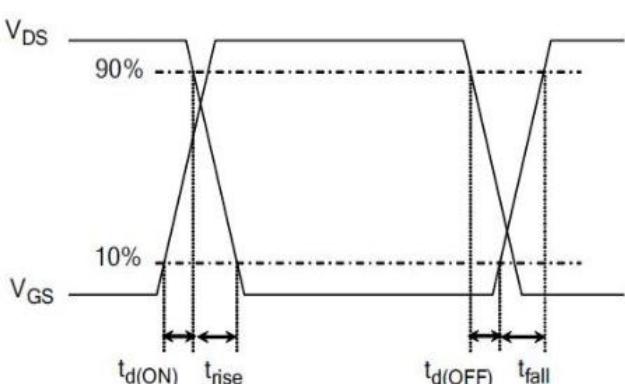


4) Resistive Switching Waveforms

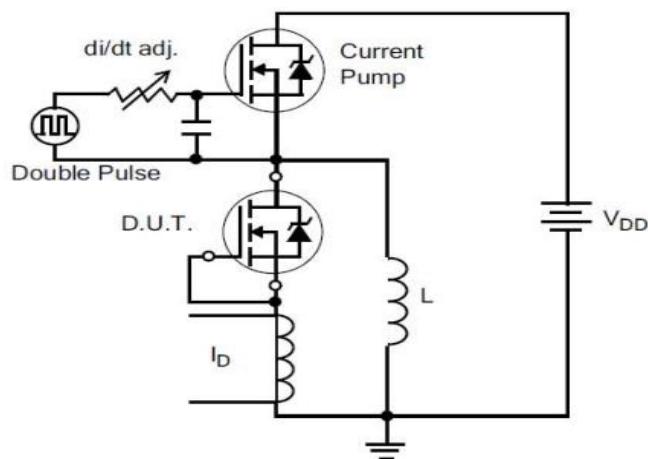


5) Diode Reverse Recovery Test Circuit

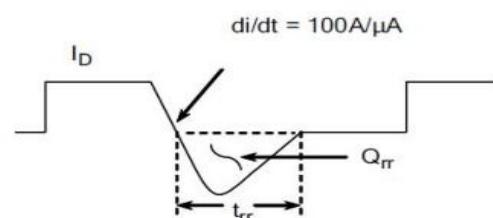


6) Diode Reverse Recovery Waveform

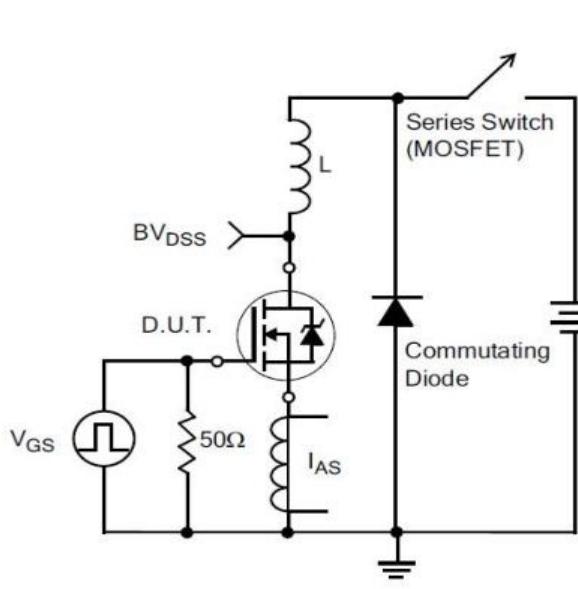

7) Unclamped Inductive Switching Test Circuit

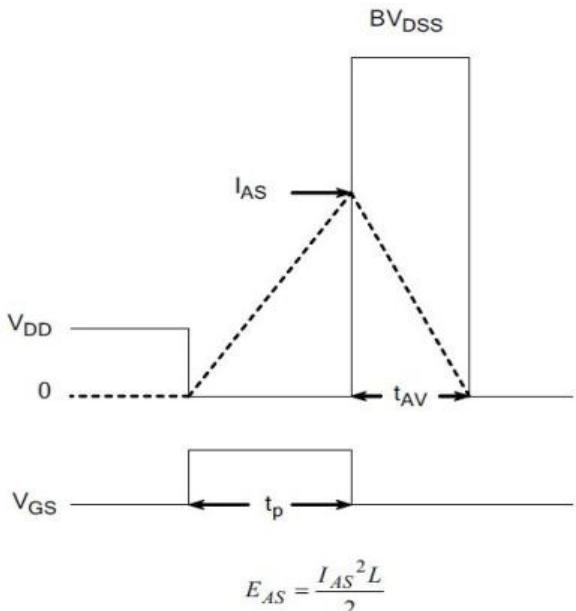


8) Unclamped Inductive Switching Waveforms

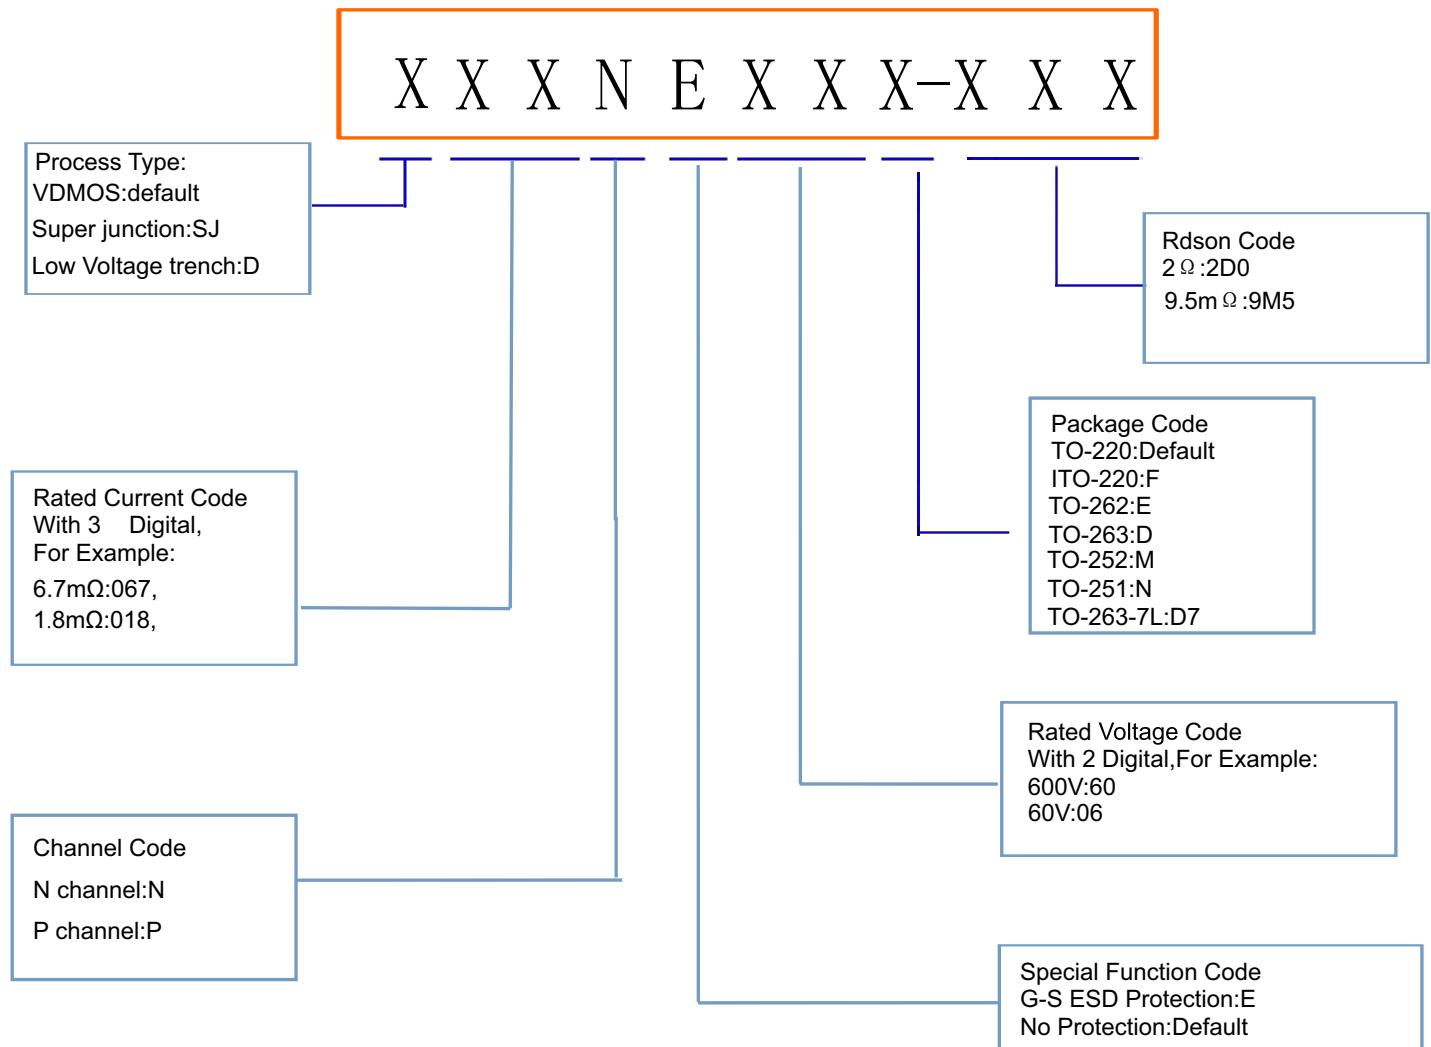**Product Names Rules**


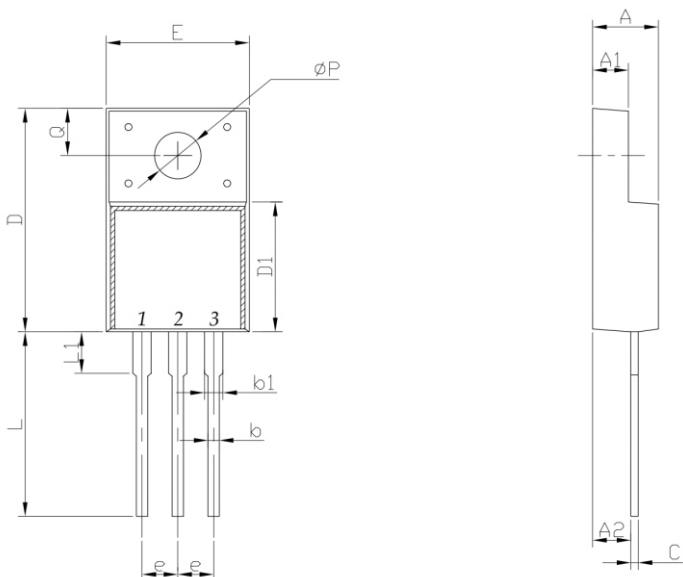
## Dimensions

## TO-220 PACKAGE OUTLINE DIMENSIONS

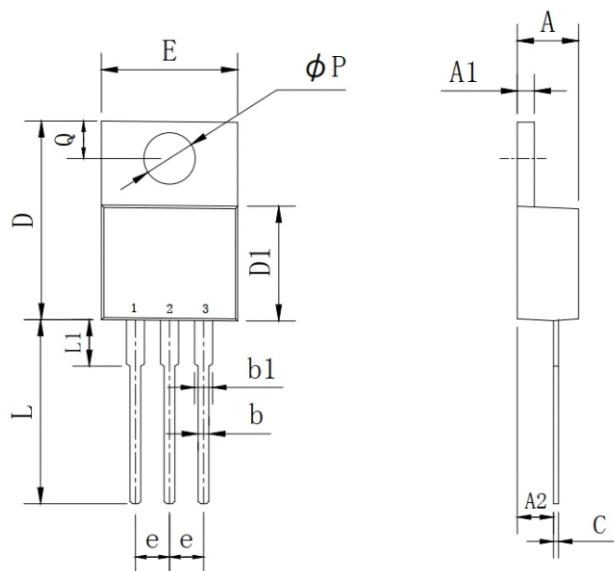

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	4.25	4.87	0.167	0.192
A1	1.07	1.47	0.042	0.058
A2	2.03	2.92	0.080	0.115
b	0.51	1.11	0.020	0.044
b1	0.97	1.6	0.038	0.063
C	0.3	0.7	0.012	0.028
D	14.6	15.9	0.575	0.626
D1	8.04	9.3	0.317	0.366
E	9.57	10.57	0.377	0.416
e	2.34	2.74	0.092	0.108
L	12.58	14.3	0.495	0.563
L1	2.8	4.2	0.110	0.165
P	3.4	4.14	0.134	0.163
Q	2.45	3	0.096	0.118


## ITO-220 PACKAGE OUTLINE DIMENSIONS



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	4.24	4.9	0.167	0.193
A1	2.3	2.92	0.091	0.115
A2	2.61	2.81	0.103	0.111
b	0.3	1	0.012	0.039
b1	0.9	1.55	0.035	0.061
C	0.3	0.7	0.012	0.028
D	14.5	16.36	0.571	0.644
D1	8.8	9.41	0.346	0.370
E	9.5	10.5	0.374	0.413
e	2.3	2.75	0.091	0.108
L	12.6	14	0.496	0.551
L1	2.45	4.3	0.096	0.169
P	2.9	3.8	0.114	0.150
Q	2.5	3.55	0.098	0.140


## Dimensions

## TO-263 PACKAGE OUTLINE DIMENSIONS

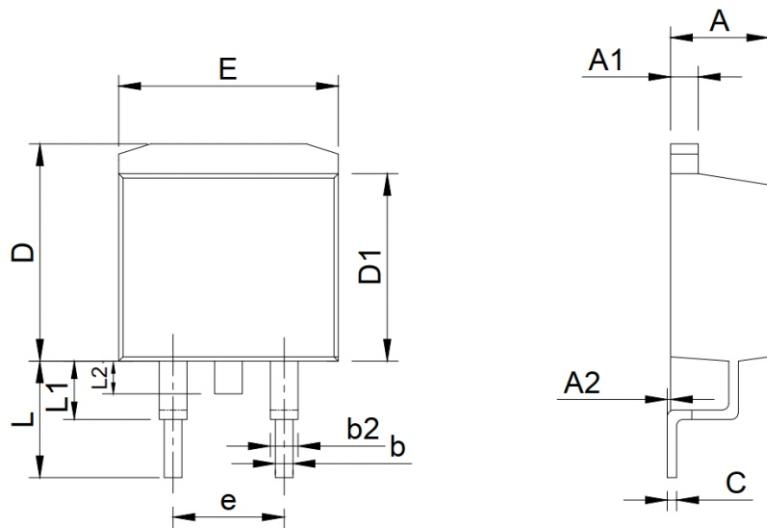

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	4.25	4.87	0.167	0.192
A1	1.07	1.47	0.042	0.058
A2	0	0.25	0.000	0.010
b	0.61	1.01	0.024	0.040
b1	1.2	1.34	0.047	0.053
C	0.3	0.6	0.012	0.024
D	9.48	10.84	0.373	0.427
D1	8.49	9.3	0.334	0.366
E	9.7	10.31	0.382	0.406
e	4.88	5.28	0.192	0.208
L	4.46	5.85	0.176	0.230
L1	1.33	2.33	0.052	0.092
L2	0	2.2	0.000	0.087


## TO-262 PACKAGE OUTLINE DIMENSIONS

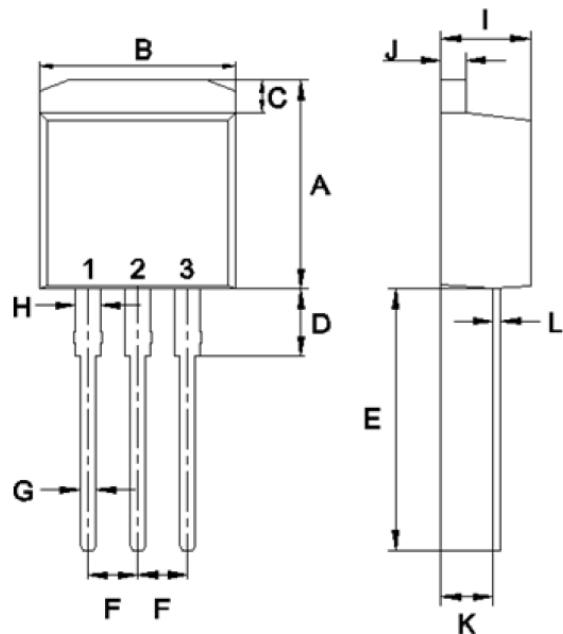

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	10.14	11.14	0.399	0.439
B	9.57	10.57	0.377	0.416
C	1.15	1.84	0.045	0.072
D	2.95	3.95	0.116	0.156
E	12.25	13.75	0.482	0.541
F	2.34	2.74	0.092	0.108
G	0.51	1.11	0.020	0.044
H	0.97	1.57	0.038	0.062
I	4.25	4.87	0.167	0.192
J	1.07	1.47	0.042	0.058
K	2.03	2.92	0.080	0.115
L	0.3	0.6	0.012	0.024


## Dimensions

## TO-251 PACKAGE OUTLINE DIMENSIONS

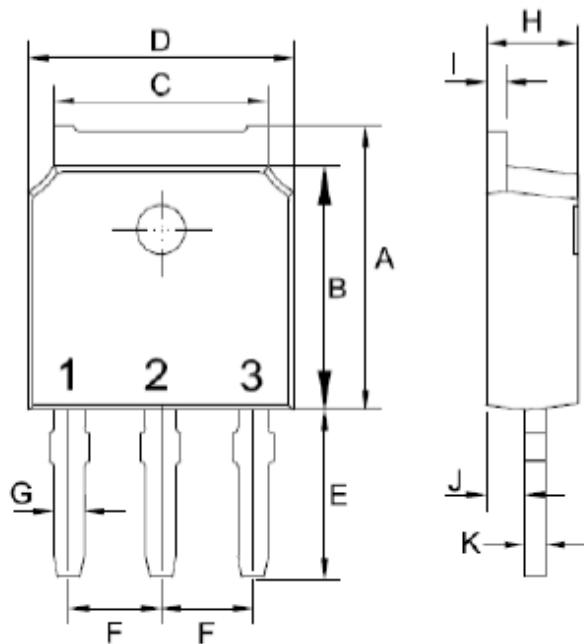

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	6.85	7.25	0.270	0.285
B	5.8	6.3	0.228	0.248
C	5	5.53	0.197	0.218
D	6.3	6.8	0.248	0.268
E	3.5	4.35	0.138	0.171
F	2.19	2.39	0.086	0.094
G	0.45	0.85	0.018	0.033
H	2.2	2.4	0.087	0.094
I	0.41	0.61	0.016	0.024
J	0.71	1.31	0.028	0.052
K	0.41	0.61	0.016	0.024


## TO-252 PACKAGE OUTLINE DIMENSIONS

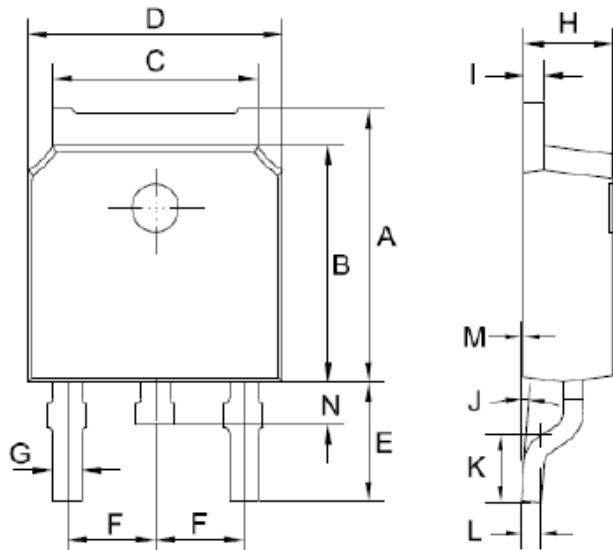

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	6.85	7.25	0.270	0.285
B	5.8	6.3	0.228	0.248
C	5	5.53	0.197	0.218
D	6.3	6.8	0.248	0.268
E	2.6	3.3	0.102	0.130
F	2.19	2.39	0.086	0.094
G	0.45	0.85	0.018	0.033
H	2.2	2.4	0.087	0.094
I	0.41	0.61	0.016	0.024
J	0°	8°	0°	8°
K	1.45	1.85	0.057	0.073
L	0.41	0.61	0.016	0.024
M	0	0.12	0.000	0.005
P	0.6	1	0.024	0.039

## Dimensions

### TO-263-7L PACKAGE OUTLINE DIMENSIONS

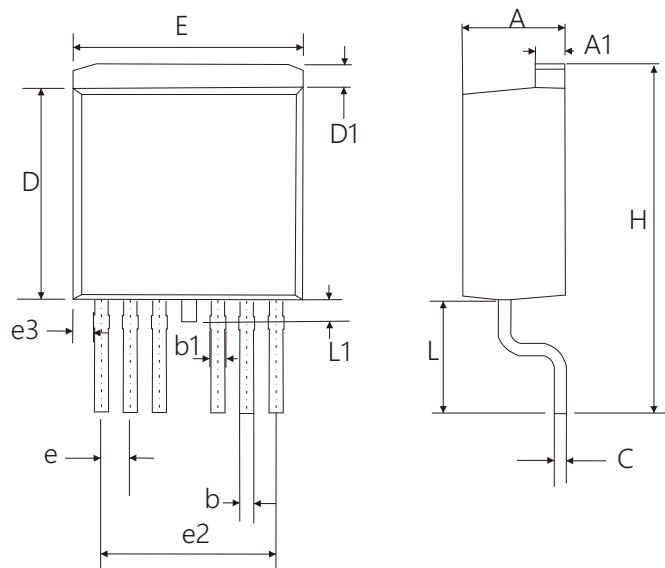

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	4.25	4.75	0.167	0.187
A1	1.2	1.4	0.047	0.055
b	0.5	0.7	0.020	0.028
b1	0.5	0.9	0.020	0.035
C	0.4	0.6	0.016	0.024
D	9.05	9.45	0.356	0.372
D1	0.7	1.3	0.028	0.051
E	9.8	10.2	0.386	0.402
e	1.07	1.47	0.042	0.058
e2	7.32	7.92	0.288	0.312
e3	0.64	1.04	0.025	0.041
H	14.65	15.65	0.577	0.616
L	4.47	5.47	0.176	0.215
L1	0.90	1.50	0.035	0.059

## Friendship Reminder

- JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.
- JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of JH.
- JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.