


## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2011/65/Eu

## PV003

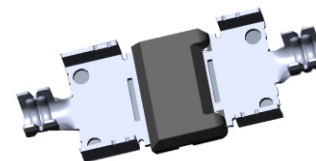

## MECHANICAL DATA

- Case: PV003 molded plastic body
- Terminals: Solderable per MIL-STD-202,method 208
- Polarity: As marked
- Mounting Position: Any

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

Parameter	Symbols	Value	Units	
Maximum repetitive peak reverse voltage	$V_{RRM}$	45	Volts	
Maximum RMS voltage	$V_{RMS}$	31.5	Volts	
Maximum DC blocking voltage	$V_{DC}$	45	Volts	
Maximum average forward rectified current See Fig. 1	$I(AV)$	80.0	Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	900	Amps	
Maximum instantaneous forward voltage at 80.0 A	$V_F$	0.53	Volts	
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	$I_R$	$T_c=25^{\circ}C$	200	$\mu A$
		$T_c=100^{\circ}C$	20	mA
Typical thermal resistance (Note 2)	$R_{\theta JC}$	1.0	$^{\circ}C/W$	
Storage temperature range	$T_{STG}$	-55 to+200	$^{\circ}C$	
Operating junction temperature range in DC forward model	$T_J$	-55 to+200	$^{\circ}C$	

- Notes:** 1.Pulse test: 300  $\mu s$  pulse width,1% duty cycle  
2.Thermal resistance from junction to case

# RATINGS AND CHARACTERISTIC CURVES MK8045C

FIG.1-FORWARD CURRENT DERATING CURVE

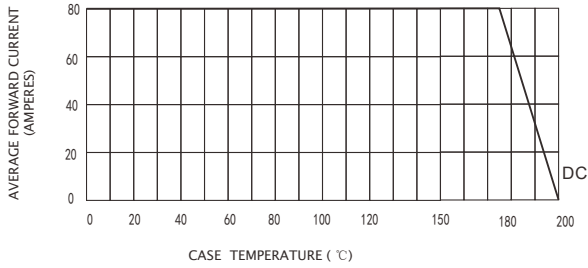


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

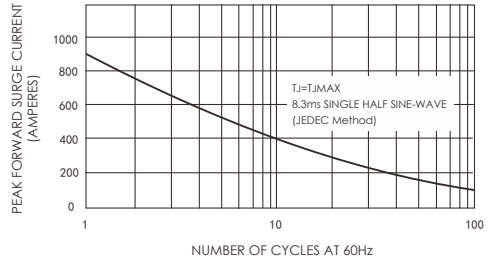


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

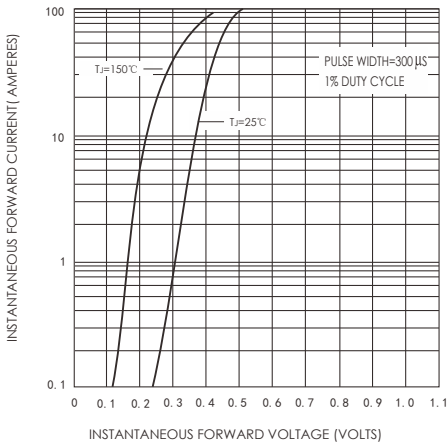


FIG.4-TYPICAL REVERSE CHARACTERISTICS


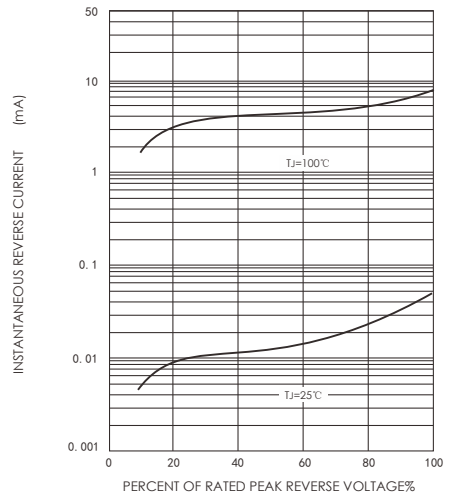


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE



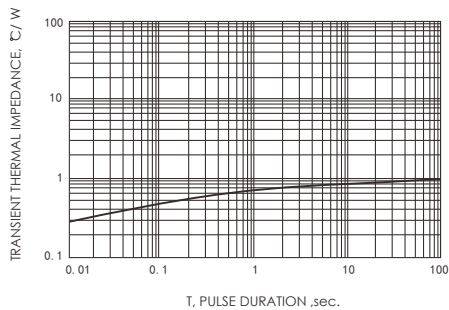

## Friendship Reminder

- JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.
  
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
  
- JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.
  
- JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
  
- No license is granted by implication or otherwise under any intellectual property rights of JH.
  
- JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.