


FEATURE

- Low leakage
- Low forward voltage drop
- High current capability
- High current surge
- High reliability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2015/863/EU

MECHANICAL DATA

- Case: JEDEC DO-41 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.012ounce, 0.33 gram

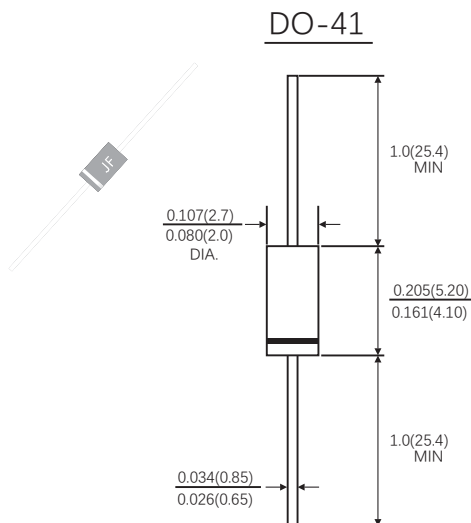

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified.Single phase ,half wave ,60Hz ,resistive or inductive load. For capacitive load,derate current by 20%.)

Parameters		Symbol	FR101G	FR102G	FR103G	FR104G	FR105G	FR106G	FR107G	Unit
Maximum Recurrent peak reverse voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current		I _{FAV}	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	30.0							Amps
Maximum Instantaneous Forward Voltage at 1.0A(Note 3)		V _F	1.3							Volts
Maximum DC Reverse Current at rated DC blocking voltage	T _J =25°C	I _R	5.0							μA
	T _J =125°C		100							
Maximum reverse recovery time(Note1)		T _{rr}	150				250	500		ns
Typical junction capacitance(Note2)		C _J	10							pF
Operating junction and storage temperature range		T _J /T _{STG}	-55 to +150							°C

Note: 1.Test conditions: $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$.

2.Measured at 1MHZ and applied reverse voltage of 4.0 Volts D.C.

3.Short duration pulse test used to minimize self-heating effect

RATINGS AND CHARACTERISTIC CURVES OF FR101G THRU FR107G

FIG.1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

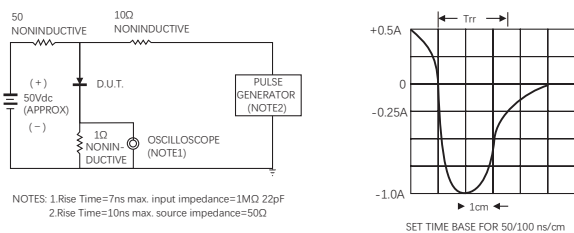


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

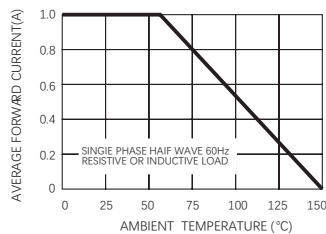


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

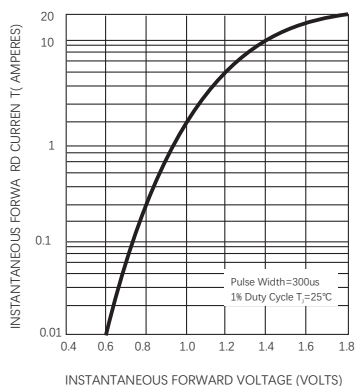


FIG.4-TYPICAL REVERSE CHARACTERISTICS

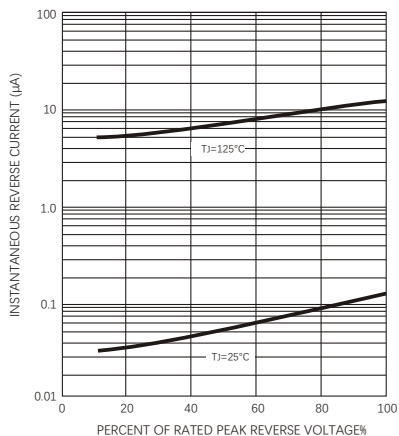


FIG.5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


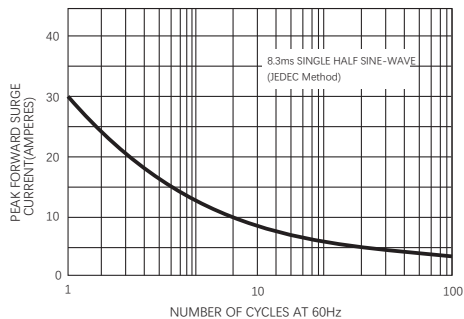


FIG.6-TYPICAL JUNCTION CAPACITANCE

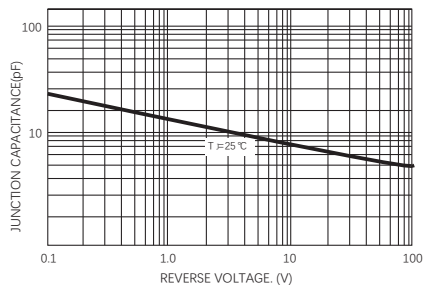

Friendship Reminder

- JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.
- JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of JH.
- JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.