


Features

- Two fully independent diodes
- Fully insulated package
- with high operation junction temperature (175°C T_j)
- Low forward voltage drop
- Optimized for power conversion: welding and industrial SMPS applications
- Easy to use and parallel
- Industry standard outline
- Designed and qualified for industrial level

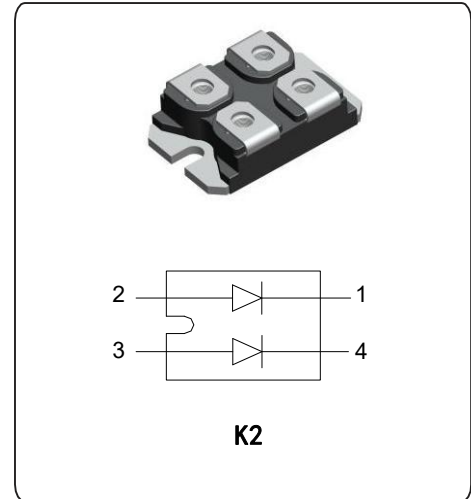

Absolute Maximum Ratings

PARAMETE	SYMBOL	TEST CONDITIONS	MAX	UNIT
Cathode to anode voltage	V_R		1200	V
Continuous forward current per diode	I_F	$T_C=100^{\circ}\text{C}$	60	A
Single pulse forward current per diode	I_{FSM}	$T_C=25^{\circ}\text{C}$	1200	A
RMS isolation voltage	V_{isol}	Any terminal to case, $t=1$ minute	2500	V
Maximum junction temperature	T_J		-55to175	$^{\circ}\text{C}$
Maximum case temperature	T_J		150	$^{\circ}\text{C}$
Storage temperture	T_{stg}		-55to150	$^{\circ}\text{C}$

Electrical Characteristics

PARAMETE	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Cathode to anode breakdown voltage	V_{BR}	$I_R=100\mu\text{A}$	1200	-	-	V
Forward voltage	V_{FM}	$I_F=60\text{ A } T_J=25^{\circ}\text{C}$			1.2	
		$I_F=60\text{ A } T_J=125^{\circ}\text{C}$			0.95	
Reverse leakage current	I_{RM}	$V_R=V_R \text{ rated } T_J=25^{\circ}\text{C}$			10	μA
		$V_R=V_R \text{ rated } T_J=175^{\circ}\text{C}$			5	mA

Thermal Mechanical Specifications

PARAMETE	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Junction to case ,single leg conducting	Rthjc		-	-	0.56	°C/w
Junction to case ,both leg conducting			-	-	0.28	
Case to heatsink	Rthcs	Flat,greased surface		0.075		
Weight				30		g
Mounting torque				1.3		Nm
Case style			SOT-227			

Ordering Information Tabel

Device code	J	K2	M	120	/	120
	①	②	③	④		⑤

- ① JH's power module
- ② Circuit configuration (2 separate diodes ,parallel pin-out)
- ③ Standard Recovery Diodes
- ④ Maximum average forward current (120A)
- ⑤ Voltage rating (120=1200V)

Performance Curves

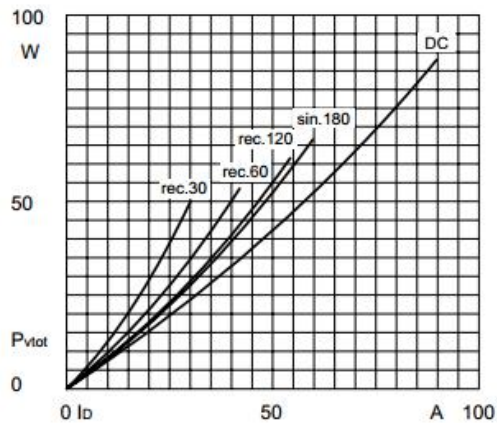


Fig1. Power dissipation

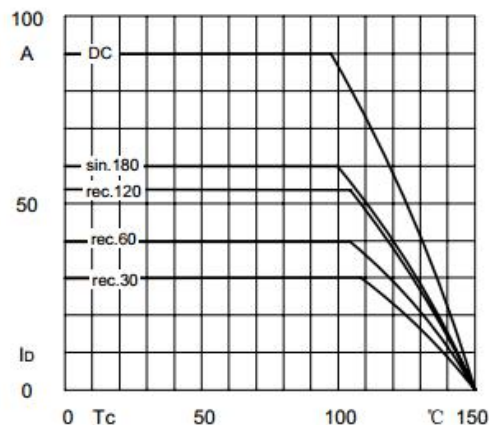


Fig2. Forward Current Derating Curve

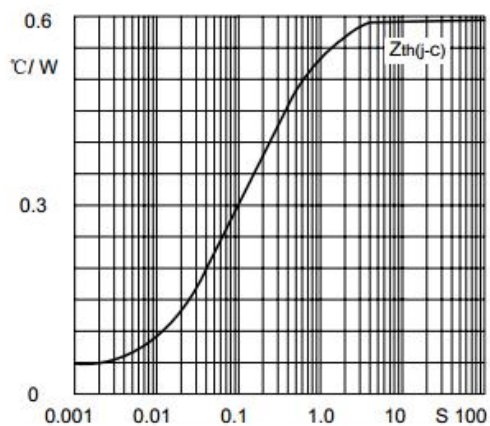


Fig3. Transient thermal impedance

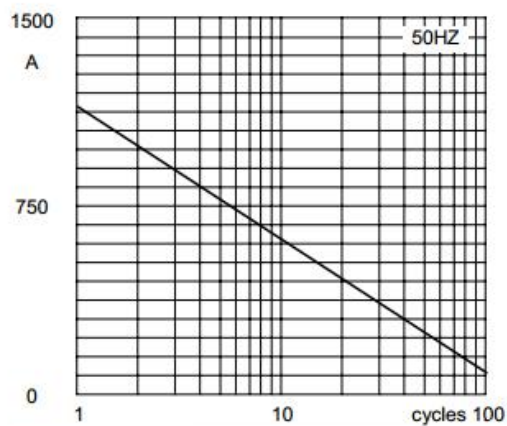


Fig4. Max Non-Repetitive Forward Surge Current


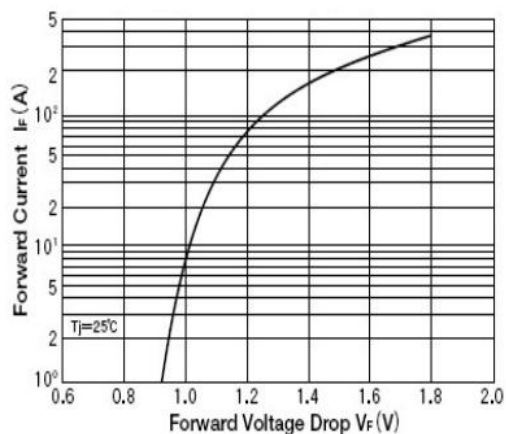


Fig5. Forward Characteristics

SOT-227 package

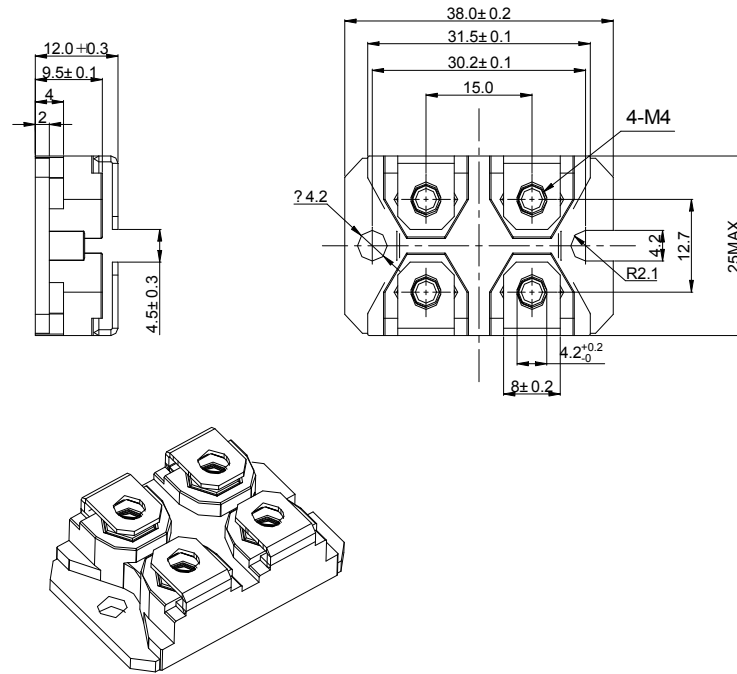

Friendship Reminder

■ JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.

济南晶恒（以下简称 JH）保留未经通知，变更本文件和与本文件相关的产品及规格的权利。

■ Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

使用方应在使用、采购本产品之前获取并确认产品信息和规格书的最新版本。

■ JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.

JH 对其产品用于某特定用途的适用性，既不做任何保证、说明或担保，也不承担任何应用协助或使用方设计的法定责任。

■ JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

JH 不保证或承担任何责任，其产品被采购使用于任何非预期或授权的应用，

■ No license is granted by implication or otherwise under any intellectual property rights of JH.

此规格书属于 JH 的知识产权,没有经过我司授权不得抄袭。

■ JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.

没有 JH 的书面授权，JH 的产品不能在生命支撑设备或系统里作为关键零件使用。