

SR4035D1 THRU SR40200D1

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 35 to 200 Volts


Forward Current - 40.0Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2011/65/EU



TO-263 D2PAK

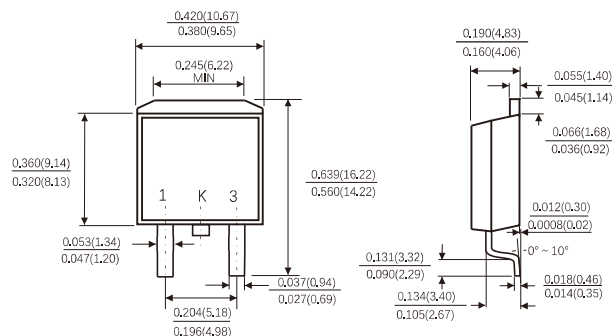

MECHANICAL DATA

- Case: JEDEC TO-263 molded plastic body
- Terminals: Solderable per MIL-STD-202,method 208
- Polarity: As marked
- Mounting Position: Any

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25 °C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

		Symbols	SR 4035D1	SR 4040D1	SR 4045D1	SR 4060D1	SR 40100D1	SR 40150D1	SR 40200D1	Units
Maximum repetitive peak reverse voltage		V _{RRM}	35	40	45	60	100	150	200	Volts
Maximum RMS voltage		V _{RMS}	25	28	32	42	70	105	140	Volts
Maximum DC blocking voltage		V _{DC}	35	40	45	60	100	150	200	Volts
Maximum average forward rectified current(see Fig.1)	Per leg	I(AV)	20.0 40.0						Amps	
	Total device									
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	300.0						Amps	
Maximum instantaneous forward voltage at 20.0 A per leg		V _F	0.60			0.75	0.85	0.90	0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	T _A =25°C	I _R	200				50			μA
	T _A =100°C		5				-			mA
	T _A =125°C		-				5			
Typical thermal resistance (Note 2)		R _{θJC}	2.5						°C/W	
Operating junction temperature range		T _J	-55 to+150						°C	
Storage temperature range		T _{STG}	-55 to+150						°C	

Notes: 1.Pulse test: 300 μ s pulse width,1% duty cycle

2.Thermal resistance from junction to case

RATINGS AND CHARACTERISTIC CURVES SR4035D1 THRU SR40200D1

FIG.1-FORWARD CURRENT DERATING CURVE

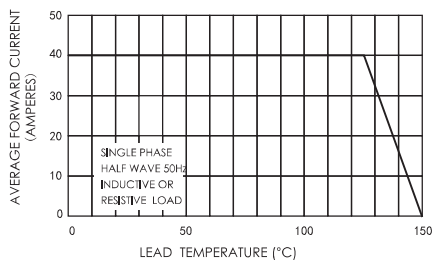


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

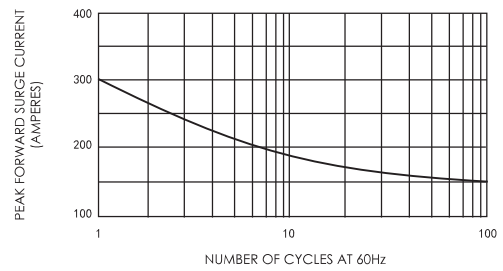


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

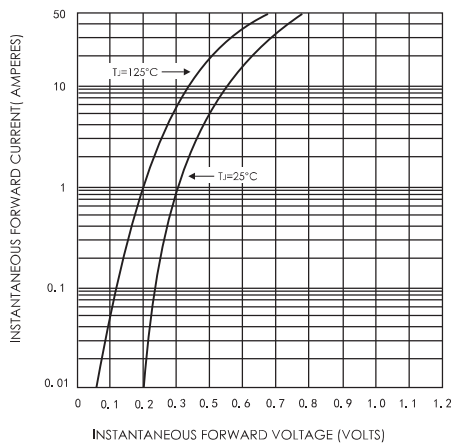


FIG.4-TYPICAL REVERSE CHARACTERISTICS

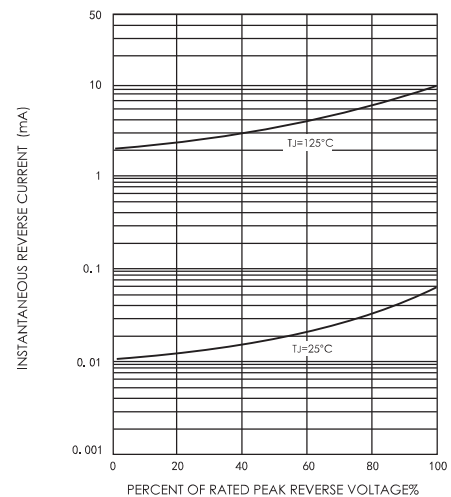


FIG.5-TYPICAL JUNCTION CAPACITANCE

