SEMICONDUCTOR

SC0865F

SILICON CARBIDE SCHOTTKY DIODE
Reverse Voltage - 650V
Forward Current -8A

Features

- Zero Reverse Recovery Current
- Zero Forward Recovery Voltage
- Positive Temperature Coefficient on VF
- Temperature-independent Switching
- 175°℃ Operating JunctionTemperature

Benefits

- Replace Bipolar with Unipolar Device
- Reduction of Heat Sink Size
- Parallel Devices Without Thermal Runaway
- Essentially No Switching Losses

Applications

- Switch Mode Power Supplies
- Power Factor Correction
- Motor drive, PV Inverter, Wind Power Station

ITO-220AC

SC0865F





V_{RRM}	=	650	V
I_F(T_C≤85℃)	=	11	A
Q_C	=	22	nC

Maximum Ratings

Symbol	Parameter	Value	Unit	Test Conditions	Note
V_{RRM}	Repetitive Peak Reverse Voltage	650	V	T_J = 25℃	
V_{RSM}	Surge Peak Reverse Voltage	650	V	T_J = 25℃	
V_R	DC Blocking Voltage	650	V	T_J = 25℃	
I_F	Forward Current	18 11 8	A	T_C ≤ 25℃ T_C ≤ 85℃ T_C ≤110 ℃	
I_{FSM}	Non-Repetitive Forward Surge Current	50	A	T_J = 25℃, t_p= 8.3ms, Half Sine Wave	
P_{tot}	Power Dissipation	43	W	T_J = 25℃	Fig.3
T_J, T_{STG}	Operating Junction and Storage Temperature	-55 to 175	℃		

Electrical Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V_F	Forward Voltage	1.4 1.7	1.65 2.3	V	I_F = 8A, T_J = 25℃ I_F = 8A, T_J = 175℃	Fig.1
I_R	Reverse Current	1 5	20 100	μA	V_R = 650V, T_J = 25℃ V_R = 650V, T_J = 175℃	Fig.2
C	Total Capacitance	520 50 41	/	pF	V_R = 0V, T_J = 25℃, f = 1MHz V_R = 200V, T_J = 25℃, f = 1MHz V_R = 400V, T_J = 25℃, f = 1MHz	Fig.5
Q_C	Total Capacitive Charge	22	/	nC	V_R = 650V, I_F = 8A di/dt = 200A/μs, T_J = 25℃	Fig.4

Thermal Characteristics

Symbol	Parameter	Typ.	Unit	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	3.5	℃/W	Fig.6
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	80	℃/W	
T_{sold}	Soldering Temperature	260	℃	

Typical Performance

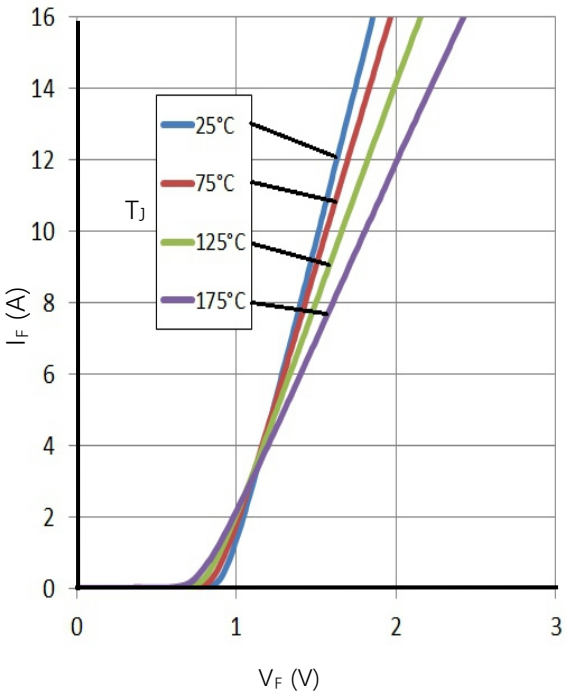

Figure 1. Forward Characteristics

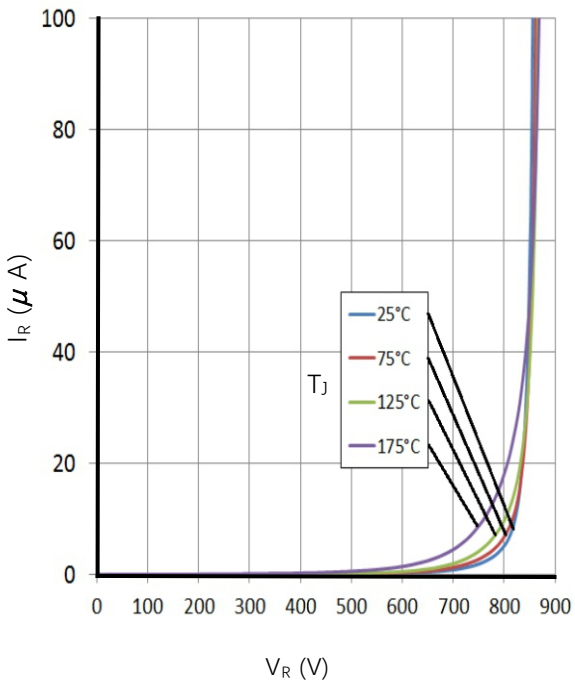

Figure 2. Reverse Characteristics

Typical Performance

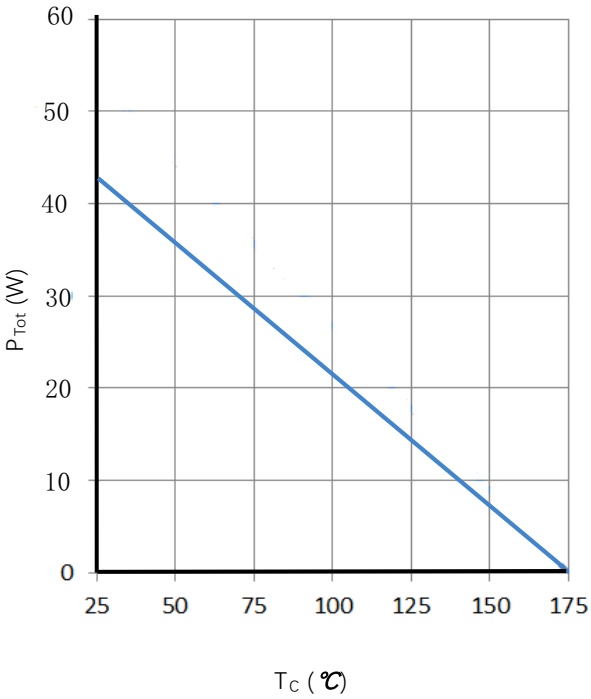

Figure 3. Power Derating

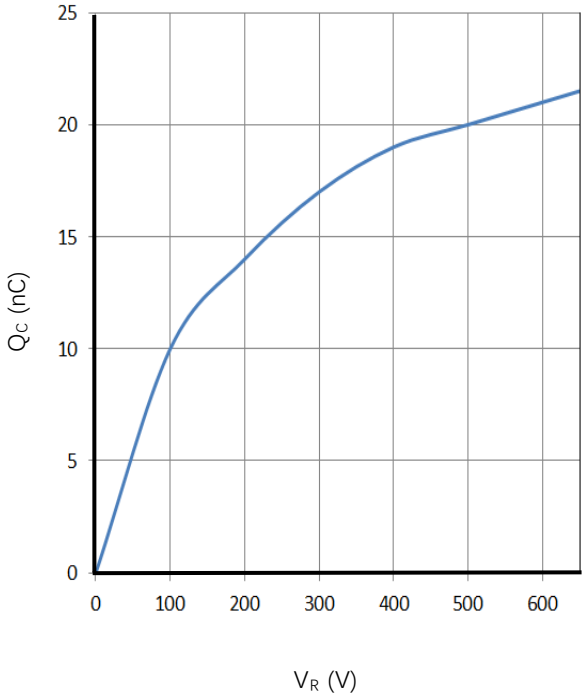

Figure 4. Total Capacitive Charge vs. Reverse Voltage

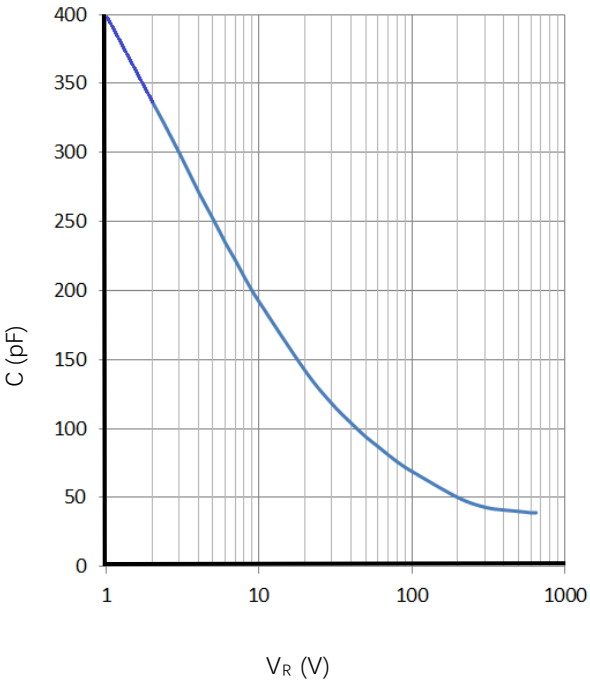

Figure 5. Total Capacitance vs. Reverse Voltage

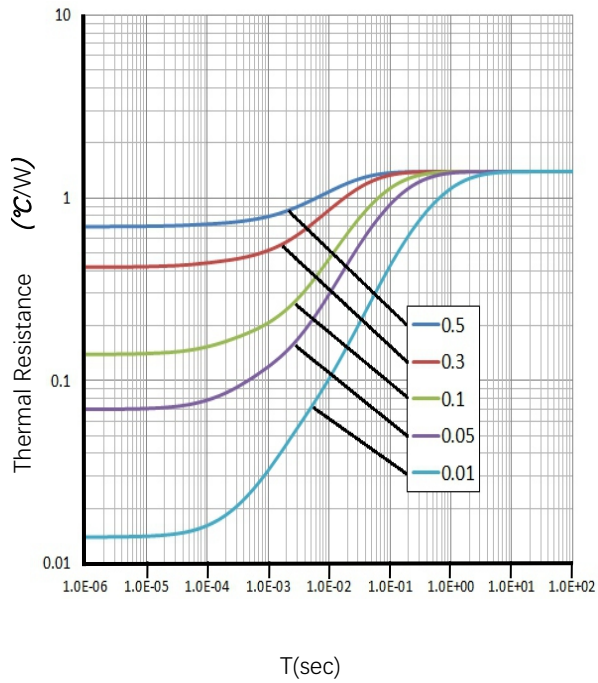

Figure 6. Transient Thermal Impedance

ITO-220AC

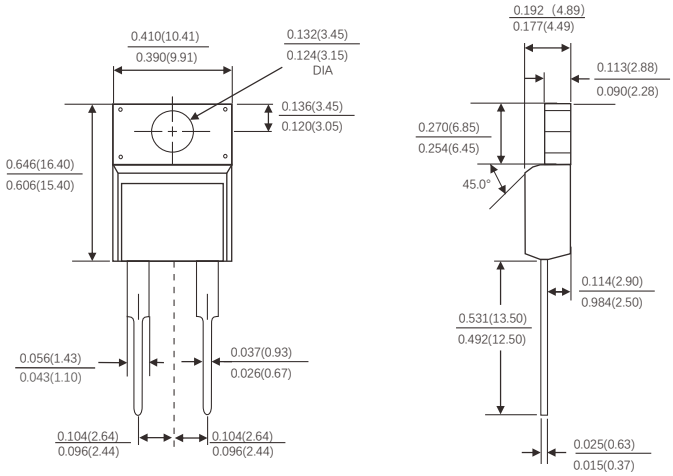

Dimensions in inches and (millimeters)

Friendship Reminder

■ JiNan JingHeng（hereinafter referred to as JH） reserves the right to make changes to this document and its products and specifications at anytime without notice.

■ Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

■ JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.

■ JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

■ No license is granted by implication or otherwise under any intellectual property rights of JH.

■ JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.