


### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU



### DO-15

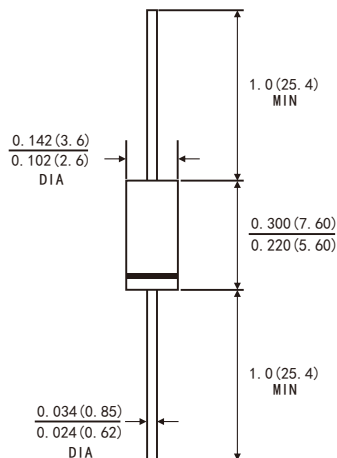

Dimensions in inches and (millimeters)

### MECHANICAL DATA

- Case: JEDEC DO-15 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: color band denotes cathode end
- Mounting Position: Any
- Weight: 0.014ounce, 0.39 gram

### TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

PRIMARY CHARACTERISTICS	
$I_F(AV)$	2.0A
$V_{RRM}$	40V
$I_{FSM}$	50A
$V_F$ at $I_F=2.0A, 125^\circ C$	0.34V
$T_{JMAX}$	150°C

### MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified )

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	40	V
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	$I_F(AV)$	2.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	$I_{FSM}$	50	A
Operating junction temperature range	$T_j$	-55 to+150	°C
Storage temperature range	$T_{stg}$	-55 to+150	°C

# RATINGS AND CHARACTERISTIC OF SR240L

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	TYP.	MAX.	Unit
Instaneous forward voltage	I <sub>F</sub> =2.0A	T <sub>A</sub> =25°C	V <sub>F</sub> <sup>1)</sup>	0.43	0.45	V
		T <sub>A</sub> =100°C		0.36	0.38	
		T <sub>A</sub> =125°C		0.34	0.36	
Reverse current	V <sub>R</sub> =40V	T <sub>A</sub> =25°C	I <sub>R</sub> <sup>2)</sup>	60	200	μA
		T <sub>A</sub> =100°C		5	10	mA
		T <sub>A</sub> =125°C		30	50	
Typical junction capacitance	4V, 1MHz		C <sub>j</sub>	170		pF

Notes: 1.Pulse test: 300 μs pulse width, 1% duty cycle

2.Pulse test: pulse width ≤ 40ms

## THERMAL CHARACTERISTICS

Parameter	Symbol	SR240L	Unit
Typical thermal resistance <sup>3)</sup>	R <sub>θJA</sub>	35.0	°C/W
	R <sub>θJL</sub>	15.0	

3.Thermal resistance from junction to lead vertical P.C.B. mounted , 0.375"(9.5mm)lead length

## AVAILABALE PACK INFORMATION

Product code	Pack	Box Size L*W*H(mm)	Quantity (pcs/box)	Carton SizeL*W*H(mm)	Quantity (box/carton)
SR240L-DO-15	B/P	190*80*21	500	433*203*230	50
SR240L-DO-15	T/B	264*74*135	3000	400*267*286	10

# RATINGS AND CHARACTERISTIC OF SR240L

FIG.1-FORWARD CURRENT DERATING CURVE

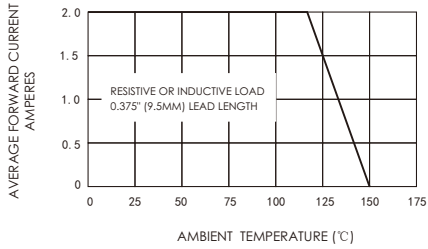


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

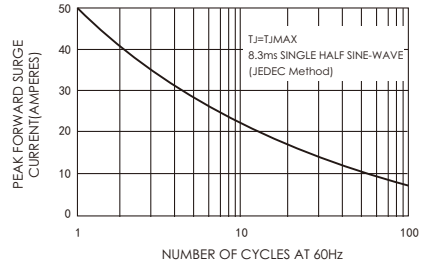


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

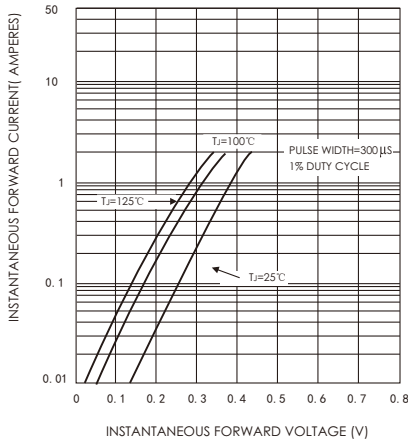


FIG.4-TYPICAL REVERSE CHARACTERISTICS

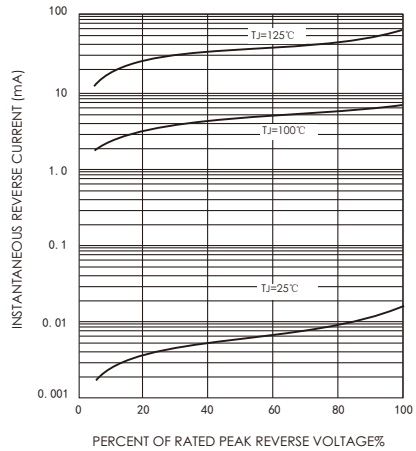


FIG.5-TYPICAL JUNCTION CAPACITANCE

